



FusionPro: Adding A Clare Video Doorbell v3 to FusionPro

Last modified: 03/25/21


Introduction

This technical bulletin provides direction for connecting the Clare Video Doorbell v3 to the ClareOne panel using FusionPro. Before connecting to ClareOne, the doorbell must be connected to the same local network as the ClareOne panel and configured according to the Clare Video Doorbell v3 Installation and user guide.

Note: The doorbell verification code is required to add the doorbell to FusionPro. The verification code can be found in the following places. The verification code is always six uppercase letters.


- On the QR code label affixed to the information card located in the original doorbell product box.
- On the QR code label affixed to the back of the doorbell.

- Can be found when scanning the QR code affixed to the label on the doorbell button under the cover. The following is a sample scan of that QR code with the verification code highlighted.

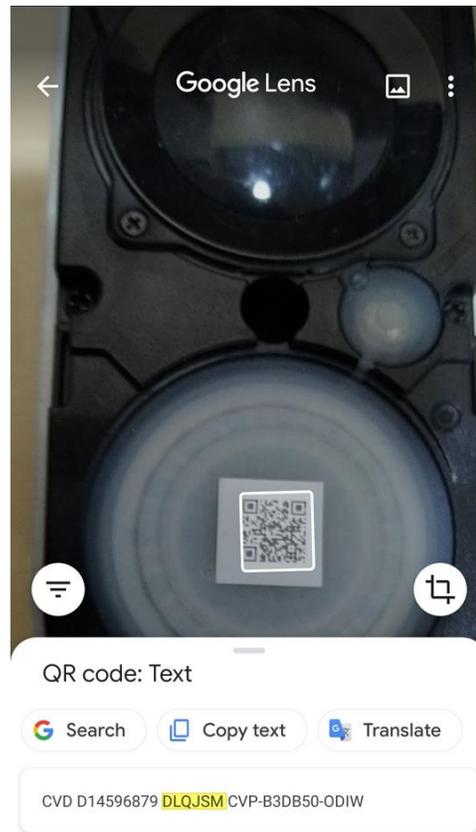


Instructions


1. Ensure doorbell is installed and configured according the [Clare Video Doorbell v3 Installation and User Guide](#).
2. Ensure doorbell and ClareOne have all current updates applied.
3. Open/Edit the FusionPro account to which the doorbell will be added.
4. Click on the **Devices** tab, then click on the **Add Devices** button.

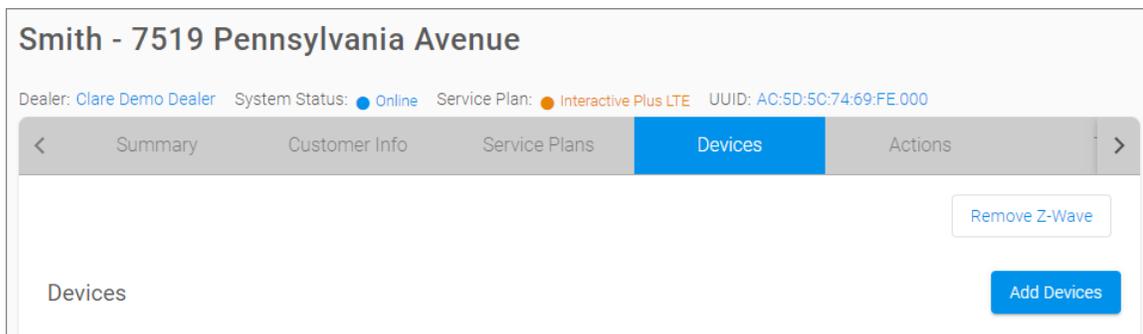

5. Select Cameras from the **Add a Device** page.

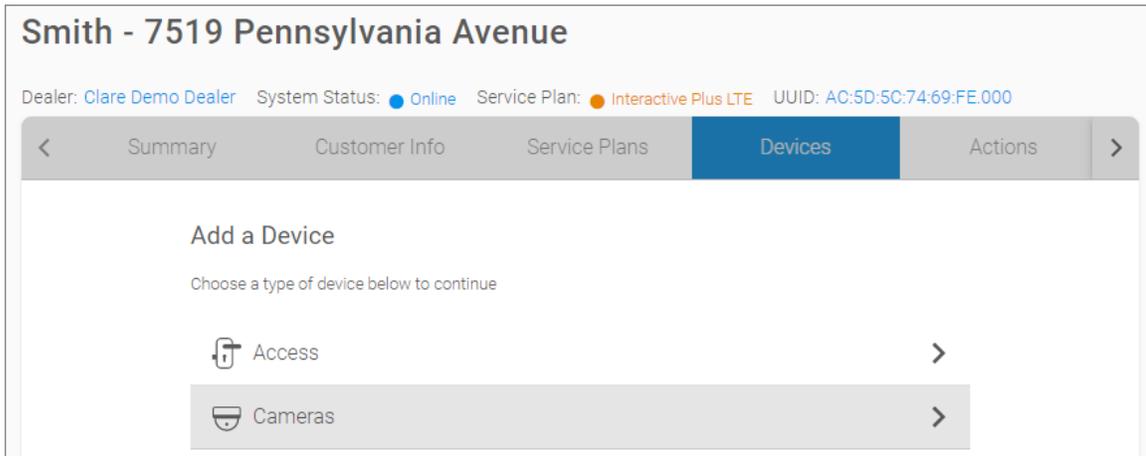

6. FusionPro will discover all cameras connected to the network

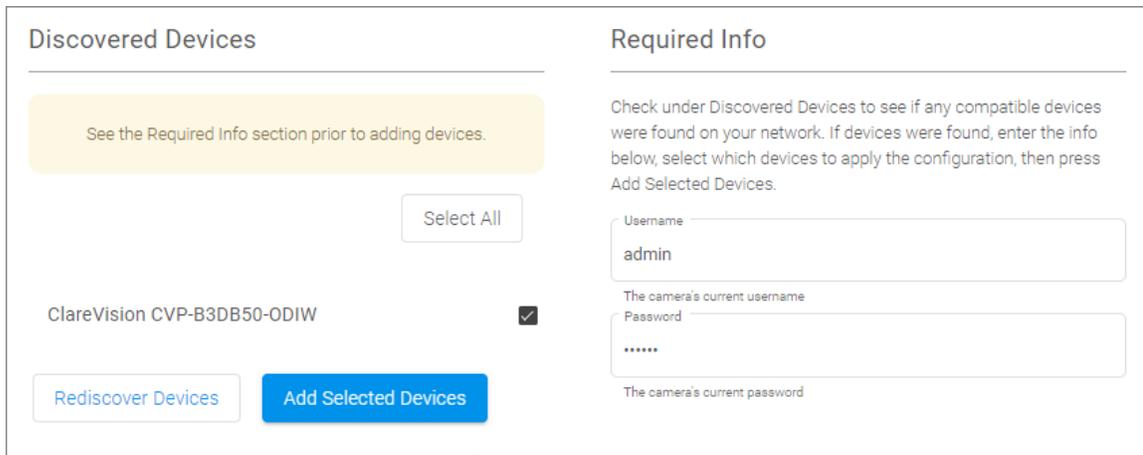

7. Check the box next to the video doorbell identified by “CVP-B3DB50-ODIW” in the listed cameras
8. Enter “admin” (case sensitive) in the **Username** field.
9. Enter the verification code (case sensitive) in the **Password** field.
10. Click the **Add Selected Devices** button.
11. Camera will add to FusionPro as a new device.
12. Add the video doorbell tile to the ClareOne panel and to the ClareOne application.

Contact information

Clare Controls, LLC.
7519 Pennsylvania Ave, Suite 104
Sarasota, FL 34243

General: 941.328.3991

Fax: 941.870.9646

www.clarecontrols.com

Integrator/Dealer Support: 941.404.1072

claresupport@clarecontrols.com

Homeowner Support (ClareCare): 941.315.2273 (CARE)

help@clarecontrols.com