



ELEVATOR ADU AIR DISINFECTING UNIT



PROTECT THE HEALTH OF YOUR ELEVATOR PASSENGERS

DisinfectAir's Elevator ADU's LED design produces UV-C that continues down the unit's entire chamber resulting in a prolonged intensity dose. This prolonged dose provides for a disinfection rate of 90.9% in the first pass and 99.9% in the first hour depending on number of utility ADU's in the space.

According to the National Center for Biotechnology Information (NCBI), the most effective germicidal wavelength occurs between 260nm and 270nm. This is the point at which DNA absorbs UV energy the most. UV-C energy is a commonly used sterilization technology that has been shown to inactivate a wide range of airborne bacteria, viruses, molds and other pathogens and microbial populations. DisinfectAir produces an effective germicidal wavelength of 265nm.

Elevator code requires natural ventilation, which comes through slots or holes inside the elevator cab, from the hoistway/elevator shaft. These shafts are dark, stale and often damp areas of the building where mold, mildew, bacteria, viruses, etc. can flourish. DisinfectAir's Elevator ADU takes care of this. It's mounted inside the elevator cab, exchanging the air six times per hour, resulting in a 99.99% kill rate of airborne pathogens.

DisinfectAir's products are designed and manufactured in Ohio.

Benefits

- LED, Eco-friendly & Ozone free
- Optimal 265nm germicidal wavelength
- Disinfection rate of 90.9% microbial reduction in the first pass
- Exchanges air once an hour in a 3,000 SF room for an effective kill rate of 99.9994%
- 9 year fan life running 8 hours a day (3 year running 24/7)
- 9 year LED life running 8 hours a day (3 year running 24/7)
- Ability to string multiple units together to accommodate very large spaces
- Virtually no maintenance
- Quiet operation
- Low cost of ownership
- UL approval pending
- Patent pending
- Disinfects room safely while occupied
- No chemical mist
- No chemical fog
- Constant airflow
- Peace of mind for clients and staff
- Continuous airborne pathogen removal
- Fogging & Misting are temporary
- We don't use Mercury UV lights because they are expensive to replace, time consuming maintenance, poor performance in low temperatures, fragile construction, easy breakage, long warm-up times, limited to one wavelength of 254 nm according to NCBI, associated with harmful ozone & cancer

DisinfectAir LLC

121 E. Ascot Lane

Cuyahoga Falls, Ohio, 44223

216-312-0502



Janet@DisinfectAirLLC.com



ELEVATOR ADU AIR DISINFECTING UNIT

Specifications

- Dimensions: 8.6"W x 5.12"H x 36.75"L
- Housing: 16ga aluminum
- Weight: 11 lbs
- Fan: 100 cfm
- Power Supply Plug & Play
- 265nm peak UV-C wavelength
- 25w LED array
- 46w total operating power
- Produces no ozone
- Reflective, aluminum, germicidal chamber
- Replaceable air filter
- Can string multiple units together for any room size or environment

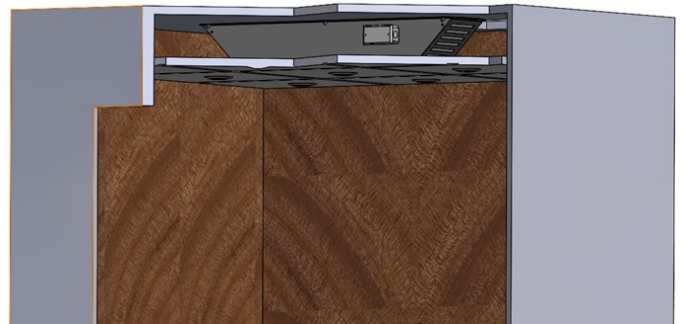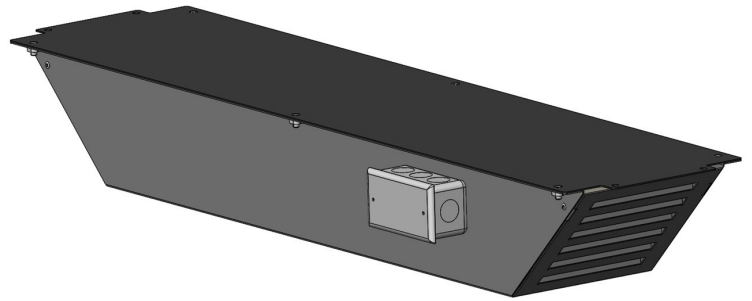

Other

- Air circulation unit that applies UVGI to create UV-C wave lengths to render microorganisms useless including viruses, bacteria & mold spores
- UVGI Ultraviolet Germicidal Irradiation
- LED lighting to create UV-C short wavelength, high energy, ideal germicidal wavelength.
- UVGI Destroys Nucleic acids of microorganisms, disrupting their DNA, effectively leaving them unable to reproduce & infect
- Multiple switch options
- 3 Year warranty on materials
- Designed and manufactured in the U.S.A.
- UL Listing pending



DisinfectAir LLC
E. Ascot Lane
Cuyahoga Falls, Ohio, 44223
440-829-0855
Janet@DisinfectAirLLC.com