


GENERAL NOTES

- ① - PUMP DOES NOT REQUIRE SUPPORTS, ENSURE THAT PIPING IS PROPERLY SUPPORTED AND NO STRAIN IS PUT ON THE CONNECTIONS TO THE PUMP.
- ② - MAGNA3 MODEL 50-80 AND ABOVE COME WITH 4 BOLT ROUND FLANGE CONNECTIONS. ALL OTHER MODELS COME WITH OVAL 2 BOLT FLANGE CONNECTIONS.
- ③ - FLUID FLOW/DIRECTION CAN BE DONE VERTICAL, HORIZONTAL, OR AT AN ANGLE. REGARDLESS OF FLOW/DIRECTION THE PUMP MOTOR SHAFT MUST BE HORIZONTAL FOR THE PUMP TO OPERATE PROPERLY. ENSURE FLOW ARROW MATCHES FLUID FLOW.
- ④ - IT IS RECOMMENDED TO INSTALL ISOLATION VALVES ON BOTH SIDES OF PUMP FOR MAINTENANCE.
- ⑤ - PUMP COMES WITH INTEGRAL TEMPERATURE AND PRESSURE SENSOR THAT CONNECTS DIRECTLY TO VOLUTE. DIFFERENTIAL PRESSURE SENSOR AVAILABLE AS CUSTOMIZATION OPTION.
- ⑥ - COMMUNICATION INTERFACE MODULES AVAILABLE FOR BMS INTEGRATION AS CUSTOMIZATION OPTIONS. CIM MODULE INSTALLED BEHIND FACEPLATE.

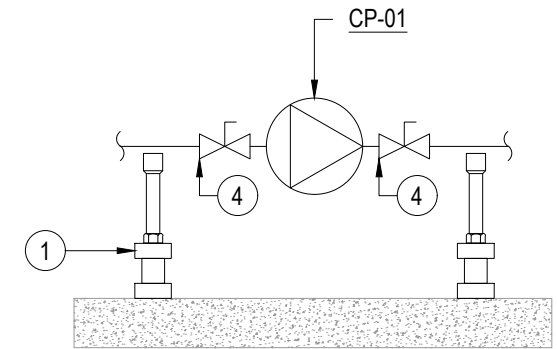

1

GRUNDFOS MAGNA3 CIRC PUMP DRAWING AND SCHEMATIC

SCALE: NTS



DRAWING TITLE:
GRUNDFOS MAGNA3 CIRC PUMP DETAIL

DRAWING NUMBER:
000005A

DRAWN BY
BM

LAST REVISED
10/01/2021

DRAWING SCALE
NTS

THE DOCUMENT AND ALL INFORMATION SHOWN IS PROPERTY OF HURLEY ENGINEERING, INC. THIS DOCUMENT IS NOT TO BE REDISTRIBUTED OR COPIED OR USED FOR THE MANUFACTURING OF EQUIPMENT WITHOUT PRIOR WRITTEN CONSENT FROM HURLEY ENGINEERING, INC.

QR CODE