


Printed from Grundfos Product Center [2021.37.007]



Company name: Created by: Phone:

	Date:	12/31/2021
Value	H [ft]	MAGNA3 32-60 F N
		Pumped liquid = Water Liquid temperature during operation = 140 °F
MAGNA3 32-60 F N	22	Density = 61.35 lb/ft ³
98126822		
5710629499844	20 -	
	18	
22.5 US gpm		
	16 -	
	14 -	
	12-	
	10	
Stainless steel	8-	
	6-	
	4-	
PE3 30%GF	2	
00 404 %	/	
	0 	10 15 20 25 30 35 Q [US gpm]
	P1	
	100 -	
	80	
6 1/2 in	00	
	60 -	
Water		
	40 -	
140 °F	20	
61.35 lb/ft ³		
	0	
8.45 106 W		9.49*
60 Hz	4.37*	
1 x 115-230 V		
0.29 1.01 A		
X4D		
F		
0.19	2.72*	
14.6 lb	h d	*
		0.45"
0710.10.2000		
	Ŵ	
	Â _	·
	0	
	MAGNA3 32-60 F N 98126822 5710629499844 22.5 US gpm 12.47 ft 19.69 ft 110 98544604 D Stainless steel EN 1.4308 ASTM 351 CF8 PES 30%GF 32 104 °F 174.05 psi GF GF15/26/40/43 PN12 6 1/2 in Water 14 230 °F 140 °F 61.35 lb/ft ³ 8.45 106 W 60 Hz 1 x 115-230 V 0.29 1.01 A X4D F 0.19	Value H MAGNA3 32-60 F N 98126822 5710629499844 22 22.5 US gpm 12.47 ft 19.69 ft 110 98544604 D Stainless steel EN 1.4308 ASTM 351 CF8 PES 30%GF 32 104 °F 174.05 psi GF GF15/26/40/43 PN12 6 1/2 in Water 14 °F 140 °F 61.35 lb/ft³ 8.45 106 W 60 Hz 1 x 115-230 V 0.29 1.01 A X4D F 0.19 14.6 lb 18 lb 0.74 ft³ US VS

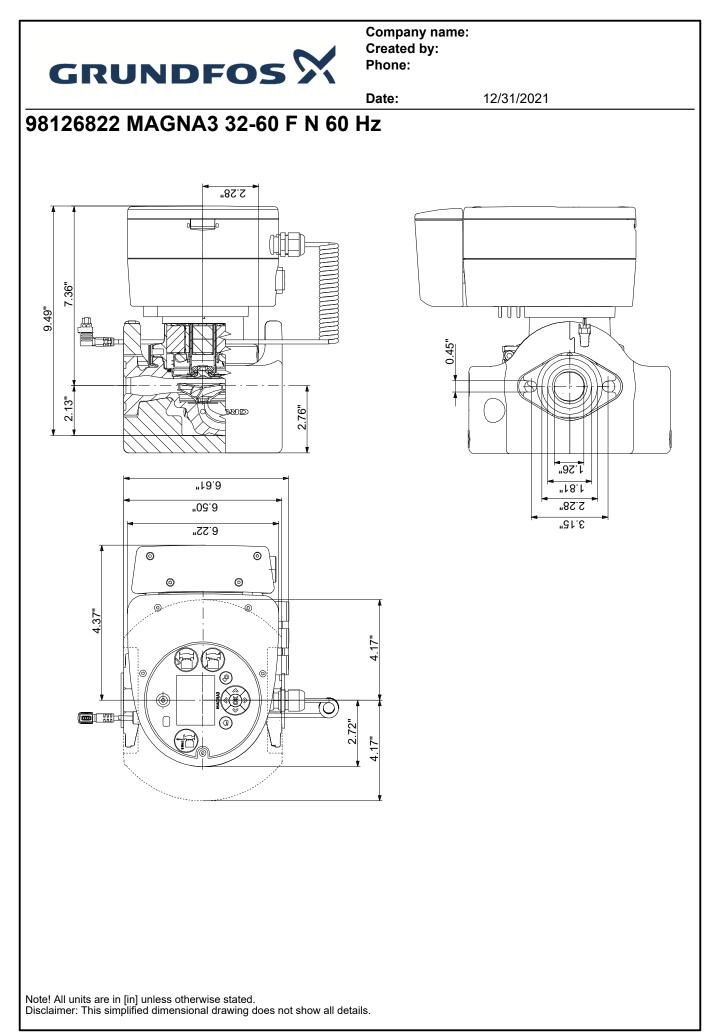



Company name: Created by: Phone:

12/31/2021

98126822 MAGNA3 32-60 F N 60 Hz

