

Date: 12/26/2021

Count | Description

NBS 050-070/6.93



Product photo could vary from the actual product

Product No.: 92559430

The pumps are non-self-priming, single-stage, centrifugal volute pumps with axial inlet port, radial outlet port and horizontal shaft.

The pump has a back pull-out design enabling removal of the motor, motor stool, cover and impeller without disturbing the pump housing or pipework.

All pumps are according to ISO 5199 standards, adjusted for American dimensions on pump and its flanges.

Inlet and outlet flanges are according to ASME 16.1/16.42. Dimensions and rated performance are according to 175/363 PSI (12/25 bar).


The mechanical shaft seal has dimensions according to EN 12756.

Motors are with main dimensions to NEMA standards. The pumps can be equipped with an MLE motor with integrated frequency converter or connected to a Grundfos CUE external frequency converter.



Date: 12/26/2021


92559430 NBS 050-070/6.93 AASG6S5ESBQQEUX2 60 Hz

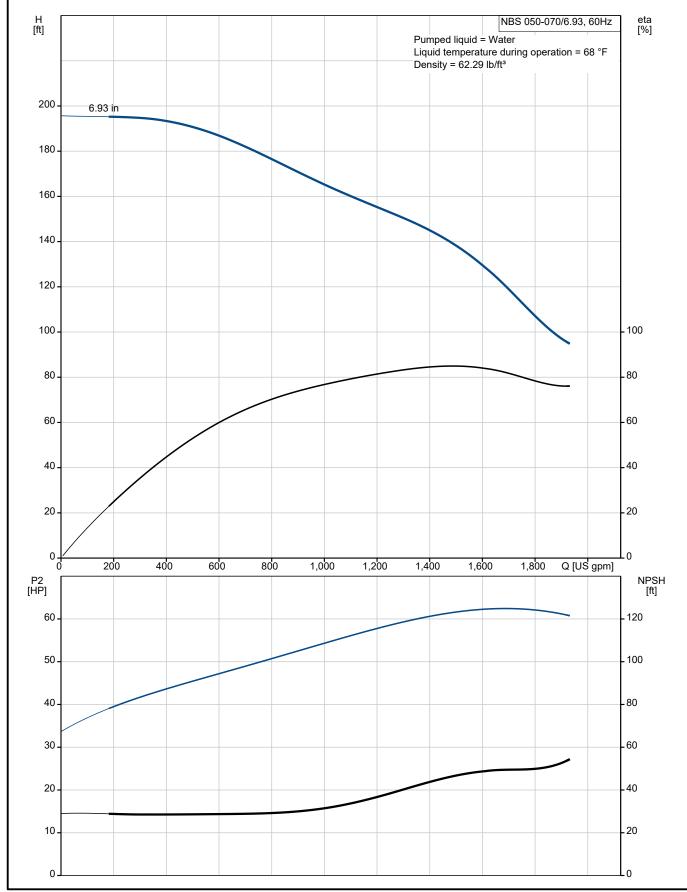




Date: 12/26/2021

Description	Value	
General information:		
Product name:	NBS 050-070/6.93 AASG6S5ESBQQEUX2	
Product No.:	92559430	
EAN:	5715116254258	
Price:		
echnical:		
Rated pump speed:	3540 rpm	
Rated flow:	1460 US gpm	
Rated head:	140.3 ft	
Actual impeller diameter:	6.93 in	
Code for shaft seal:	BQQE	
Curve tolerance:	2B HI 14.6:2016	
Pump version:	Α	
Materials:		
Pump housing:	Cast iron	
Pump housing:	EN-GJL-250	
Pump housing:	ASTM A48-35	
mpeller:	Stainless steel	
mpeller:	EN 1.4308	
mpeller:	AISI 304	
Shaft:	Stainless steel	
Shaft:	EN 1.4462	
Shaft:	SAF 2205	
nternal pump house coating:	No coating	
Material code:	S5	
Code for rubber:	E	
nstallation:		
max amb:	104 °F	
Maximum operating pressure:	174.05 psi	
Type of connection:	ANSI	
Size of inlet connection:	DN 150	
Size of outlet connection:	DN 125	
Pressure rating for connection:	Class 125	
Mounting options design code:	C	
Support block (Yes/No):	Y	
Connect code:	G	
Liquid:	-	
Pumped liquid:	Water	
Liquid temperature range:	-13 248 °F	
Selected liquid temperature:	68 °F	
Density:	62.29 lb/ft³	
Electrical data:		
Motor standard:	NEMA	
E efficiency class:	IE3 / NEMA Premium	
Rated power - P2:	75 HP	
Nain frequency:	60 Hz	
· ·	3 x 230/460 V	
Rated voltage:	3 X 230/460 V 166.8-83.4 A	
Rated current:		
Rated speed:	3540 rpm	
Number of poles:	2	
Enclosure class (IEC 34-5):	TEFC	
Mounting designation (IEC 34-7, Code I):	NEMA type C / foot	
Others:	0.04	
DOE Pump Energy Index CL:	0.94	
Net weight:	1250 lb	
Gross weight:	1250 lb	
Shipping volume:	23.9 ft³	

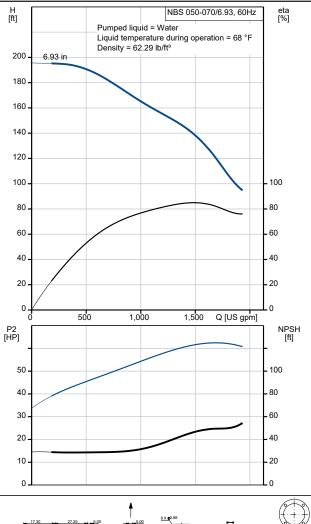







		Date:	12/26/2021	
Description Country of origin:	Value			
Country of origin:	US			




12/26/2021 Date:


92559430 NBS 050-070/6.93 AASG6S5ESBQQEUX2 60 Hz







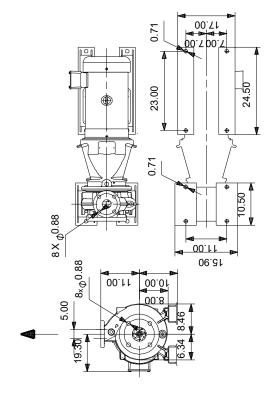



Note! All units are in [in] unless otherwise stated. Disclaimer: This simplified dimensional drawing does not show all details.