

Date: 12/19/2021

Count | Description

NBS 025-095/9.53



Product photo could vary from the actual product

Product No.: 92560114

The pumps are non-self-priming, single-stage, centrifugal volute pumps with axial inlet port, radial outlet port and horizontal shaft.

The pump has a back pull-out design enabling removal of the motor, motor stool, cover and impeller without disturbing the pump housing or pipework.

All pumps are according to ISO 5199 standards, adjusted for American dimensions on pump and its flanges.

Inlet and outlet flanges are according to ASME 16.1/16.42. Dimensions and rated performance are according to 175/363 PSI (12/25 bar).


The mechanical shaft seal has dimensions according to EN 12756.

Motors are with main dimensions to NEMA standards. The pumps can be equipped with an MLE motor with integrated frequency converter or connected to a Grundfos CUE external frequency converter.



Date: 12/19/2021


92560114 NBS 025-095/9.53 AASG6S2ESBQQEIY6 60 Hz

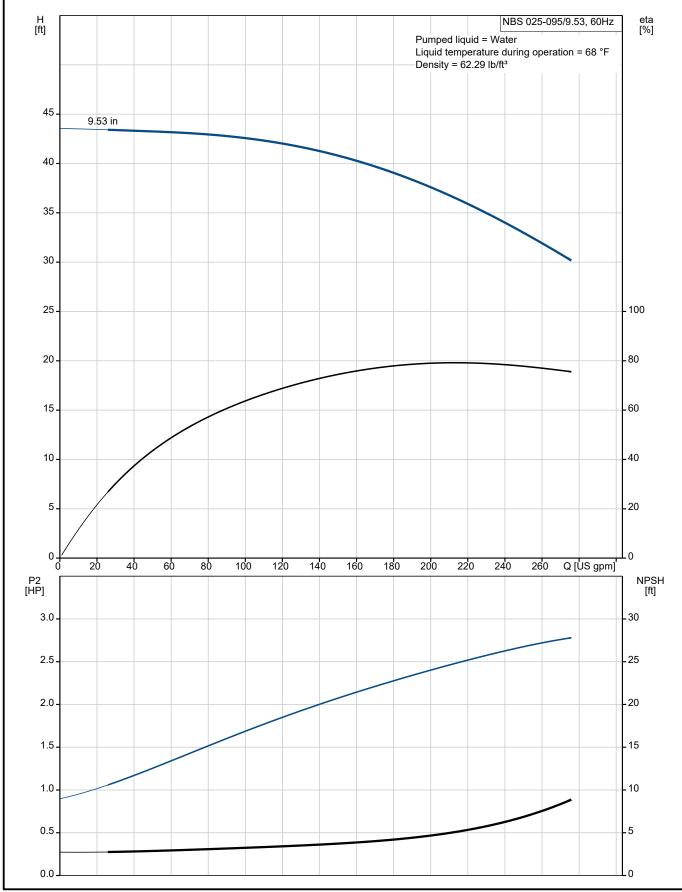



Date: 12/19/2021

Description	Value
General information:	
Product name:	NBS 025-095/9.53 AASG6S2ESBQQEIY6
Product No.:	92560114
EAN:	5715116267920
Price:	
Technical:	
Rated pump speed:	1165 rpm
Rated flow:	212 US gpm
Rated head:	36.18 ft
Actual impeller diameter:	9.53 in
Code for shaft seal:	BQQE
Curve tolerance:	2B HI 14.6:2016
Pump version:	A
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-GJL-250
Pump housing:	ASTM A48-35
Impeller:	Stainless steel
Impeller:	EN 1.4308
Impeller:	AISI 304
Shaft:	Stainless steel
Shaft:	EN 1.4201/1.4034
Shaft:	AISI 420
Internal pump house coating:	No coating
Material code:	S2
Code for rubber:	E
Installation:	
t max amb:	104 °F
Maximum operating pressure:	174.05 psi
Type of connection:	ANSI
Size of inlet connection:	DN 80
Size of outlet connection:	DN 65
Pressure rating for connection:	Class 125
Mounting options design code:	В
Support block (Yes/No):	Y
Connect code:	G
Liquid:	\A_{1} \
Pumped liquid:	Water
Liquid temperature range:	-13 248 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
Electrical data: Motor standard:	NITMA
	NEMA
IE efficiency class:	IE3 / NEMA Premium
Rated power - P2:	3 HP
Main frequency:	60 Hz
Rated voltage:	3 x 230/460 V
Rated current: Rated speed:	9.2-4.6 A
Number of poles:	1165 rpm 6
Enclosure class (IEC 34-5):	TEFC
Mounting designation (IEC 34-7).	
Code I):	NEMA type C / foot
DOE Pump Energy Index CL:	0.00
	401 lb
Net weight: Gross weight:	401 lb
Shipping volume:	7.7 ft ³
Shipping volunie.	7.7 IL

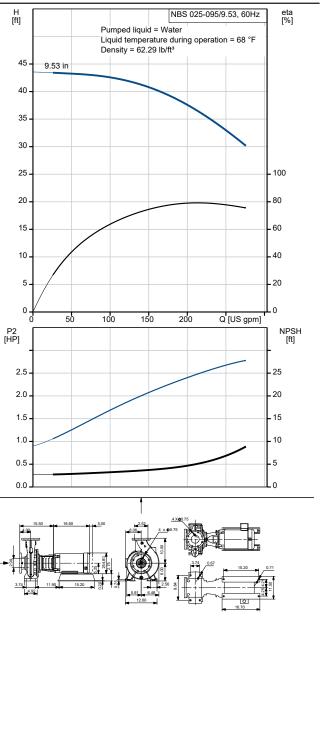




		Date:	12/19/2021	
Description Country of origin:	Value US			
Country of origin:	US			



12/19/2021 Date:

92560114 NBS 025-095/9.53 AASG6S2ESBQQEIY6 60 Hz

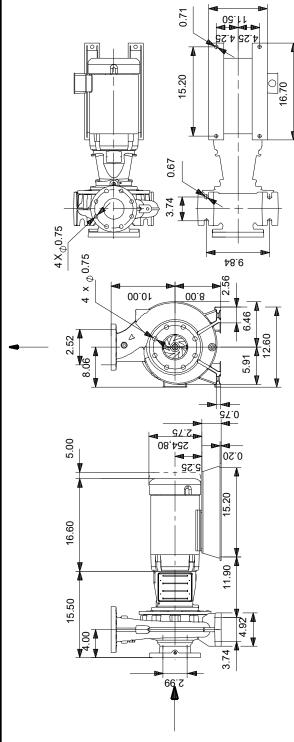

Note! All units are in [in] unless otherwise stated. Disclaimer: This simplified dimensional drawing does not show all details.