

Soliton[®]

NetAttest EPS



Out of the Box Network Security

NetAttest EPS is a powerful, all-in-one port-based network access control solution, enabling a Zero Trust Network strategy. It guides organisations to set up certificate-based user- and device authentication. Everything needed is available in a single package, including the necessary Public Key Infrastructure, a RADIUS server and a one-time password server.


NetAttest EPS makes it easy for IT managers to toughen network security and create multiple network segments (VLANs) while users experience seamless access. At the same time, NetAttest EPS provides WiFi security at WPA Enterprise level. Plus, it contains a Mac address database for systems that are not able to provide certificates.

NetAttest EPS supports certificate distribution to unmanaged systems, including private and third-party devices from partners and contractors. The multiplatform certificate management app (Soliton KeyManager) makes it easy for end-users to install certificates on their systems, eliminating the need for Mobile Device Management (MDM) to provide secured certificate distribution.

In detail, NetAttest EPS has everything you need for full network access control right out of the box. It's vendor-agnostic and easily integrates with most third-party products, reducing the overall costs.

- Authentication, Authorisation, and Accounting for user resource requests
- EAP authentication including MAC address, one-time passwords, and certificate-based authentication
- Dedicated or subordinate certificate authority to integrate with existing Public Key Infrastructures
- Guest access for time-limited access to provide encrypted (free) WiFi
- Uncapped scalability, with all functionality

All-in-one Port-based Network Access Control Solution

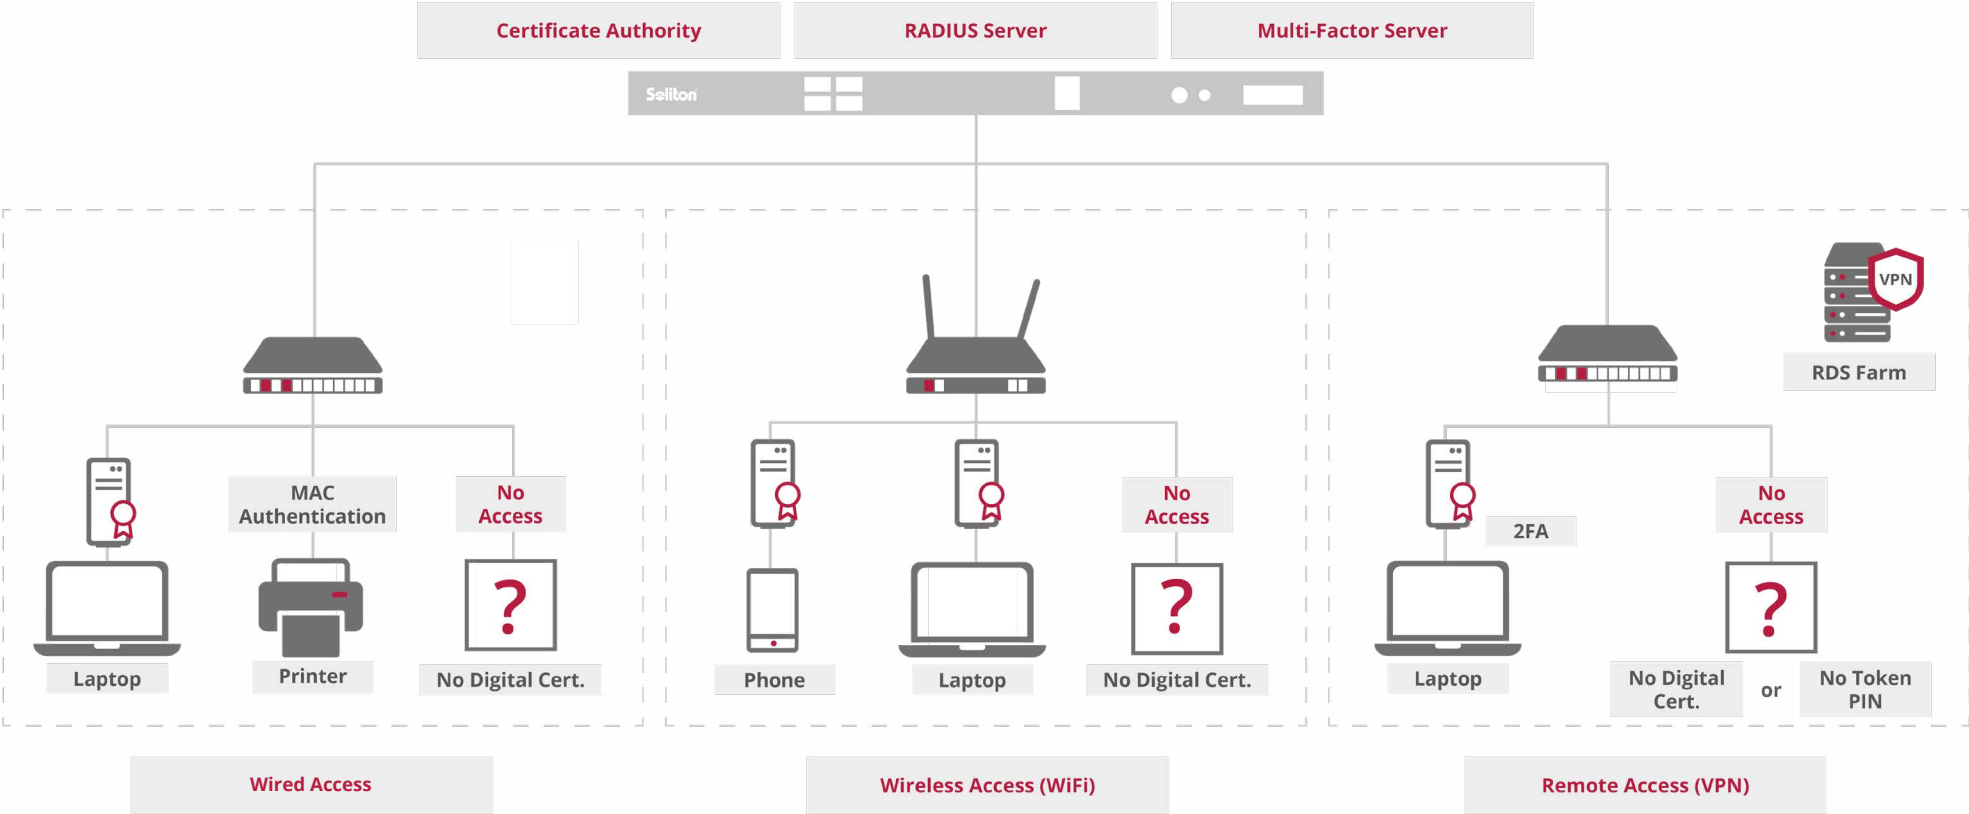

IEEE802.1X The Gold Standard of Network Authentication

Devices attempting to connect to a restricted LAN, WLAN or VPN require an authentication mechanism. IEEE 802.1X, an IEEE Standard for Port-Based Network Access Control (PNAC), provides protected authentication for secure network access. Soliton developed an all-in-one NAC solution based on certificate-based EAP-TLS with the combination of fool-proof certificate management.

- No vendor lock-in
- Agentless approach
- Eliminates the use of Pre-Shared Keys
- Reduces risk for credential theft
- Prevents over-the-air credential theft and Man in the Middle attacks
- Forces users to go through an enrolment/onboarding process, ensuring their devices are configured correctly

Wizard-Guided Installation/Management

Soliton's approach is always to take out complexity and enable easy control and management for IT. The wizard-guided feature of NetAttest EPS allows a quick, intuitive dashboard making it straightforward to install and maintain.

- Questionnaire on each possible configuration
- Context-based manuals provided in the portal
- Outstanding tasks based on questionnaire visible
- Task driven menu builder for optimised operation dashboard

Key Features

Full Back-Up And Redundancy



- Full back-up completes in less than 20 seconds
- Full restores take just 100 seconds
- Full configuration (including CA configuration) automatically shared daily between redundant installations
- Creates redundant installations of RADIUS servers to provide a contingency for Certificate Authority (CA) issues.

Easy to Make Redundant Installations



In case of a redundant configuration, the RADIUS server on both units are active. The full configuration, including the CA configuration, is automatically shared daily. In case the primary CA crashes, the backup CA will take over.

Scales with all functionalities



Up to 100,000 devices

User & Guest Access



Granular control for both users and guests for time-limited and secure access to encrypted (free) WiFi. When authenticated, the guest user is automatically directed to the right network resources. NetAttest EPS also provides an internal user database for storing temporary employees or contractors.

All-in-one NAC



NetAttest EPS embeds features to optimise administering of security functions;

- Conducts user requests to access company's resources and provides Authentication, Authorization, & Accounting services.
- The built-in RADIUS server provides multiple EAP authentication methods, including MAC address, One-Time Passwords (OTP), certificate-based authentication, etc.
- Acts as a dedicated Certificate Authority (CA) issuing and managing certificates. It can also act as a subordinate CA which integrates into an existing Public Key Infrastructure.

Fast Deployment



Initial set up takes less than 5 minutes, full NAC is up and running in 30 minutes (depending on infrastructure).

100% vendor agnostic



By using industry-standard authentication technologies, NetAttest EPS avoids vendor lock-in issues.

Policy Control



Agentless providing role- and device-based secure network access control for any device, employees, contractors and guests across any multi-vendor wired, wireless and VPN infrastructure.

Certificate Authority

Key features include:

- **Web-portal:** a self-service portal for end-users to request and download their own user- and device certificates. Approval can be automated or after approval by the administrator.
- **Online Certificate Status Protocol (OCSP) Responder:** The CA offers OCSP for easy checking of revocation of certificates.
- **Support of Simple Certificate Enrolment Protocol (SCEP):** the embedded SCEP-server makes issuing digital certificates simple and scalable for other IT systems, such as MDM systems and third-party devices, that require a certificate for authentication.
- **Customizable Certificate Signing Request (CSR) templates:** The CSR templates include any data of extended key usage or key generation, including certificate validity period and renewal period.
- **Special-purpose certificates:** The CA allows the administrator to generate special purpose certificates such as Windows SmartCard, Code Signing and Domain Controller certificates.

Mac Address Database

With the MAC address feature, network administrators have a dedicated database available that allows the authentication of MAC addresses of non-802.1X supplicants. The database can store up to 200,000 MAC addresses.

Other features include:

- The MAC address feature automatically detects the non-IEEE 802.1X supplicants in the network and adds them to the safelist.
- The dedicated interface for registering new MAC addresses allows the administrator to add new devices to the network quickly.

Any Device – Same Deployment Process

Use the NetAttest EPS unified deployment process to distribute and install digital certificates on any device. The multi-platform certificate management app (Soliton KeyManager) means the deployment process is always the same - regardless of device or operating systems.

Features include:

- **Proxy-server:** handles SCEP requests and adds additional security by protecting the internal Certificate Authority (NetAttest EPS) by URL rewriting and forwarding an SSL/TLS encrypted SCEP request to the internal Certificate Authority (NetAttest EPS.)
- **OTA protocol:** Embeds the Apple Over-The-Air (OTA) protocol supporting certificates on Apple devices.

Mobile Device Management Capabilities


For additional security, NetAttest EPS offers Mobile Device Management (MDM) features. It allows users to create a profile, including several MDM functions such as automatic locking after a predefined time and password prerequisites. Other functions include remote device lock and wipe and the possibility to obtain device information.

Soliton KeyManager App

Soliton KeyManager app makes it easy for network administrators to use short-life certificates for enhanced security. The application means users can self-service on any device, automatically requesting and installing user- and device certificates in just 3 steps. Soliton KeyManager app also sends users a warning when certificates are due to expire. Users can click the link to renew the certificate.

Other key benefits include:

- Soliton KeyManager adds security to the Simple Certificate Enrolment Protocol (SCEP) by including a unique secret per request and e.g. APID, IMEI, or UDID during the SCEP process.
- Soliton KeyManager can generate both a public and a private key. It stores the private key on the device in a format that cannot be exported, while the public key is forwarded to NetAttest EPS for authentication purposes.

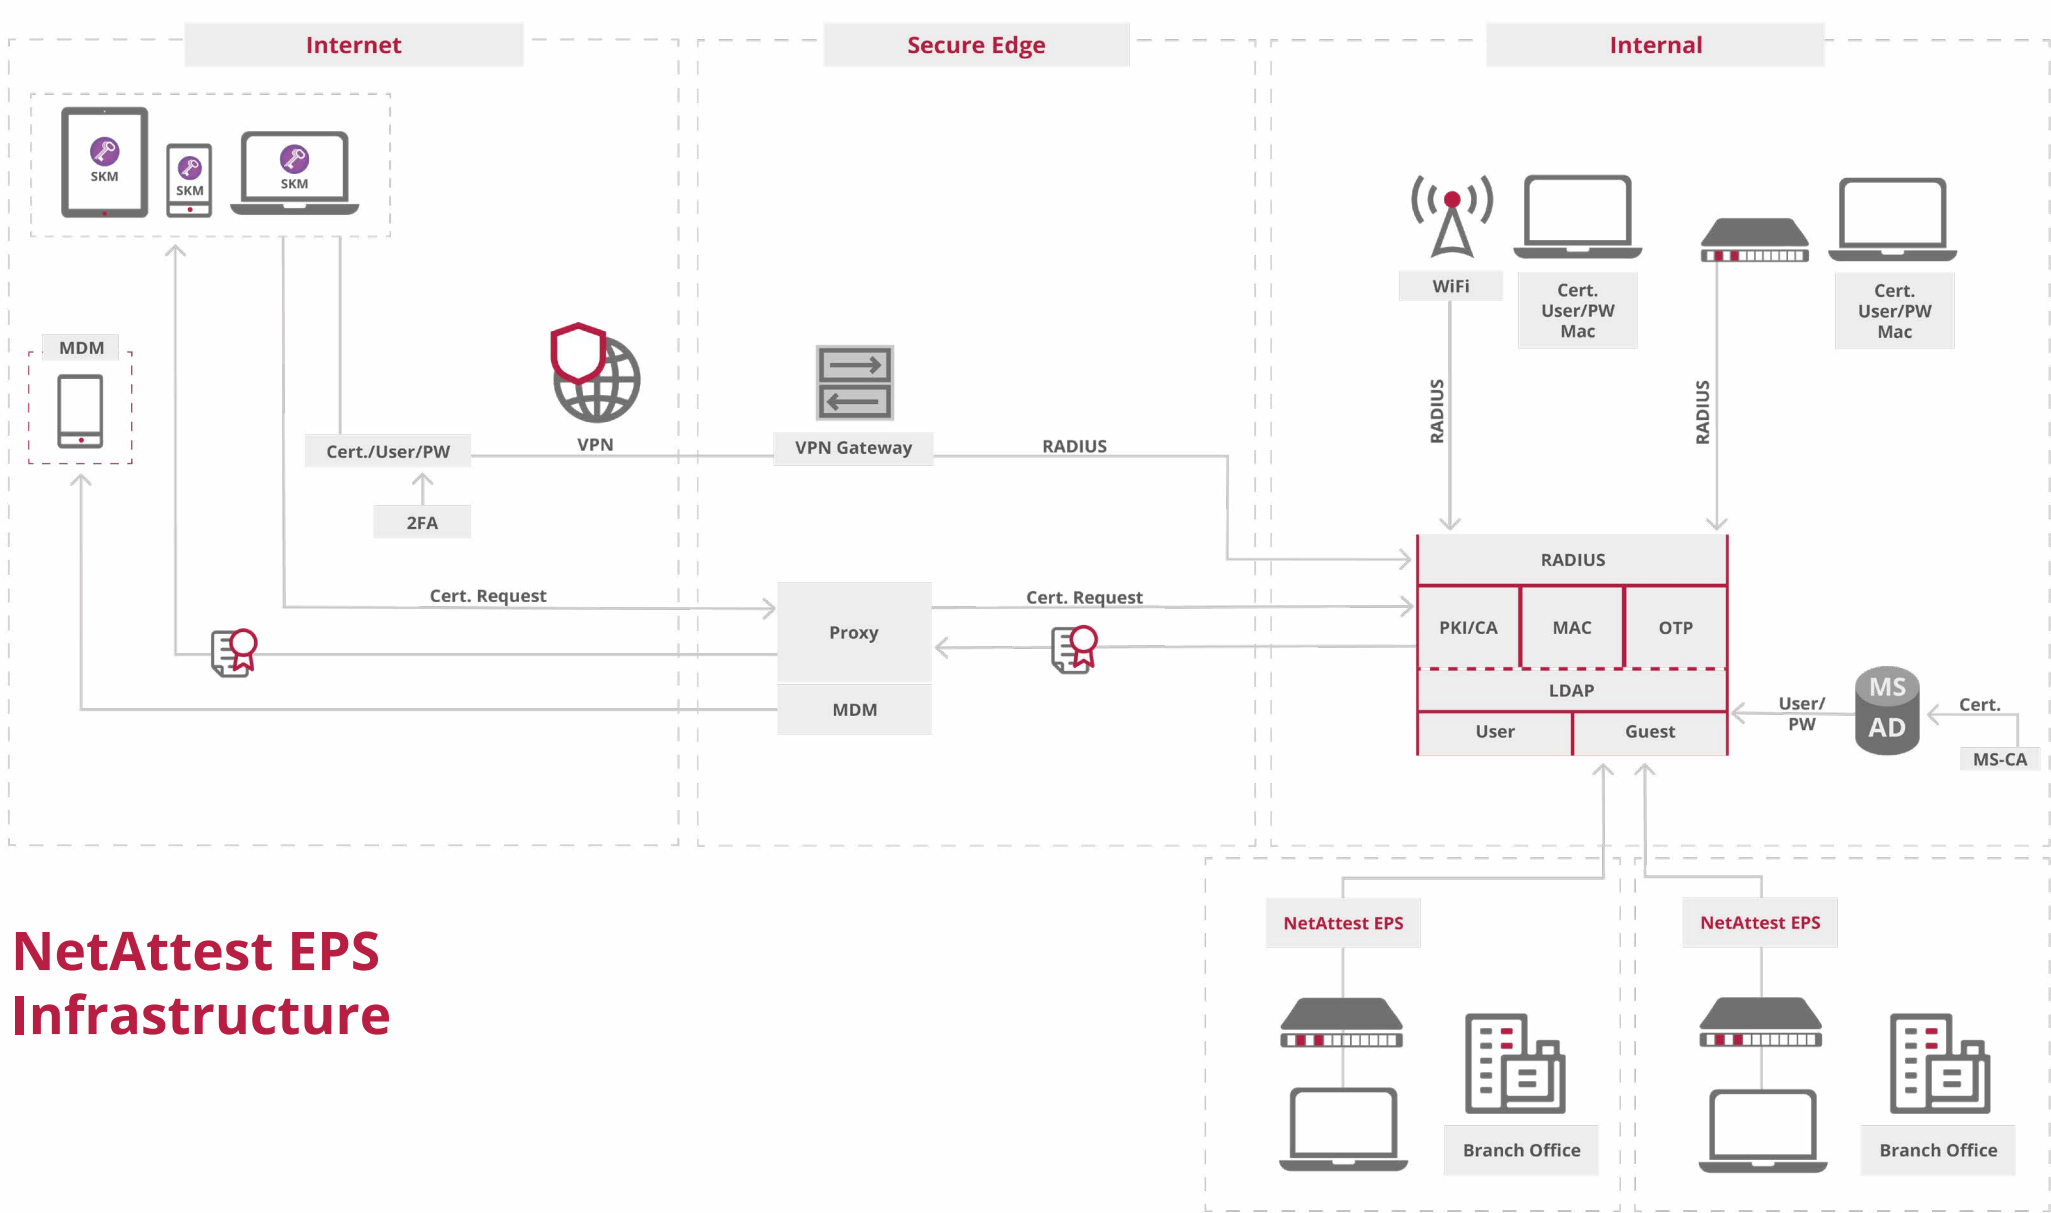

NetAttest EPS Infrastructure

Specifications NetAttest EPS

Product Feature		Model EPS-ST05A-A & EPS-ST05A-V	Model EPS-DX05A-A & EPS-DX05A-V
	Max. number of user registration	5,000	100,000
	Max. number of RADIUS clients	500	N/A (Up to 4,000 is recommended)
	Supporting authentication protocol	EAP-TLS, EAP-MD5, EAP-PEAP (MS-CHAPv2, GTC), EAP TTLS (PAP, CHAP, MS-CHAP, MS-CHAPv2, GTC), Cisco LEAP, EAP-FAST, PAP, CHAP, MS-CHAP, MS-CHAPv2	
	Redundancy	√	√
Radius Extension	One time password	√	√
	MAC address authentication	√	√
	Group profile	√	√
Certificate Authority (CA)	Client certificate publish	√	√
	External server certificate publish	√	√
	Max. number of certification	2,000	400,000
	Extended CA function	√	√
External database	Windows domain	√	√
	External LDAP database	√	√
	RADIUS proxy	√	√
Log management	RADIUS accounting	√	√
	Log maintenance	x	√
	Other	SNMP (agent) NTP synchronisation Syslog (TCP/UDP) Support UPS	

Physical Appliance

Model	EPS-ST05A-A	EPS-DX05A-A
Form factor	EIA19 inch (incl. rack mount kit)	
Dimensions (W x D x H)	438 x 44 x 292 mm	443 x 44 x 386 mm
Network interface	10/100/1000BASE-T(X) Auto-MDI-X x 4 ports	
Weight	4.2 kg	7.3 kg
Power supply	47~63Hz (90~135Vac) 90~264VAC	
Max. power consumption	28VA	120 VA
Calorific value	95.5BTU/h 24.1kcal 28W	409.2BTU/h 103.1kcal 120W
Operating environment	Humidity 20~90% non-condensing Temperature 0 ~ 40°C	
Certifications	VCCI (Class B) FCC (Class A) CE, UL, RoHS PSE (power adapter)	

Virtual Appliance

Model	EPS-ST05-V	EPS-DX05-V
Supporting virtual platform	VMware ESXi 7.0 / 6.7 / 6.5 Microsoft Hyper-V (Tested on Windows Server 2016/2019)	
VMware virtual machine version	13	
Virtual machine image	OVA(VMWare ESXi) / Installer(Hyper-V)	
Number of CPU	4	4
Memory size	2,048 MB	8,192 MB
HDD 1	5GB	96GB
Network adapter	4	
	<ul style="list-style-type: none"> • Supports redundancy with virtual and physical appliance. • No support for displacement by using virtual platform function such as vMotion and VMwareFT (use the NetAttest EPS redundancy function) • Support back-up/restore between virtual and physical appliance 	

 **EMEA office**

Soliton Systems Europe N.V.

Barbara Strozziilaan 364 | 1083 HN
Amsterdam | The Netherlands

+31 (0) 20 896 5841 |
emea@solitonsystems.com |
www.solitonsystems.com

Soliton[®]

Soliton Systems helps companies solve IT security challenges with a unique set of high quality, cost-effective products and solutions. As a global company with over 40 years of IT security experience, its solutions are deployed by many of the world's leading companies.

All of the information and material inclusive of text, images, logos, product names is either the property of, or used with permission by Soliton Systems Europe N.V. The information may not be distributed, modified, displayed, reproduced – in whole or in part – without prior written permission by Soliton Systems. Trademarks Soliton[®] and its logo are registered trademarks. Disclaimer All information herein was carefully gathered and examined. However, Soliton Systems cannot be held responsible for mistakes or incompleteness of content. Soliton Systems may change or modify parts at any time without notification and accept no liability for the consequences of activities undertaken based on the contents.