



LED Color Tunable Fixture

Three Changeable Color Temperature Options




3000K (Warm White)

Comforting & Restful
provides for a relaxing atmosphere



4000K (Cool White)

Work Effectively
perfect for all workspace

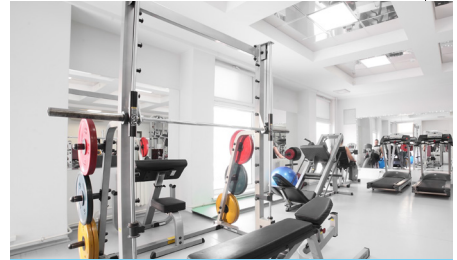

5000K (Super White)

Invigorating
great for commercial, displays, and reading

Your fixture can be adjustable through 3 color temperatures and allows you to choose your preferred light color.

Decorative Flush Mount (coming soon)



Item#	Description	Watt	Lumen	Volt	Dim	Kevin	Hours	Feature	Dimension (in)
87728-SU	LFX/DC012/BN/SCT/15W/E/D	14	1000	120	Triac	30K/40K/50K	50000	DL	3.5(w) 12.0(d)
87729-SU	LFX/DC014/BN/SCT/21W/E/D	21	1600	120	Triac	30K/40K/50K	50000	DL	3.8(w) 14.0(d)
87730-SU	LFX/DC016/BN/SCT/24W/E/D	24	1600	120	Triac	30K/40K/50K	50000	DL	3.8(w) 16.0(d)
87731-SU	LFX/DC018/BN/SCT/28W/E/D	28	2000	120	Triac	30K/40K/50K	50000		3.8(w) 18.0(d)

Surface Mount Downlights



Item#	Description	Watt	Lumen	Volt	Dim	Kevin	Hours	Feature	Dimension (in)
87738-SU	LFX/DISC/SCT/7.5"/15W/D/WH	15	800	120	Triac/Elv	30K/40K/50K	50000	WL	1.1(w) 6.3(d)
87742-SU	LFX/DISC/SCT/7.5"/15W/D/BN	15	800	120	Triac/Elv	30K/40K/50K	50000	WL	1.1(w) 6.3(d)

Surface Mount Downlights



Item#	Description	Watt	Lumen	Volt	Dim	Kevin	Hours	Feature	Dimension (in)
81282-SU	LFX/MP/5R/10W/E/D/SCT/WH	10	600	120	Triac/Elv	30K/40K/50K	50000	DL,ES	0.6(w) 8.4(d)
81283-SU	LFX/MP/5S/10W/E/D/SCT/WH	10	600	120	Triac/Elv	30K/40K/50K	50000	DL,ES	0.6(h) 4.4(w) 4.4(d)
81284-SU	LFX/MP/7R/15W/E/D/SCT/WH	15	900	120	Triac/Elv	30K/40K/50K	50000	DL,ES	0.6(w) 7.4(d)
81285-SU	LFX/MP/7S/15W/E/D/SCT/WH	15	900	120	Triac/Elv	30K/40K/50K	50000	DL,ES	0.6(h) 6.4(w) 6.4(d)
81286-SU	LFX/MP/9R/18W/E/D/SCT/WH	18	1100	120	Triac/Elv	30K/40K/50K	50000	DL,ES	0.6(w) 9.0(d)
81287-SU	LFX/MP/9S/18W/E/D/SCT/WH	18	1100	120	Triac/Elv	30K/40K/50K	50000	DL,ES	0.6(h) 9.0(w) 9.0(d)

Downlight Retrofit Kits



Item#	Description	Watt	Lumen	Volt	Dim	Kevin	Hours	Feature	Dimension (in)
87720-SU	LFX/RDL/SCT/BF/4R/8W/E/D	8	600	120	Triac	30K/40K/50K	50000	DL,ES	2.7(w) 5.1(d)
87721-SU	LFX/RDL/SCT/BF/5/6R/15W/E/D	15	1125	120	Triac	30K/40K/50K	50000	DL,ES	2.7(w) 5.1(d)
87723-SU	LFX/RDL/SCT/5/6R/15W/E/D	15	1125	120	Triac	30K/40K/50K	50000	DL,ES	2.8(w) 7.4(d)

DIM = Dimmable

DL = Rated Damp Location

WL = Rated Wet Location

DLC = Design Lights Consortium

ES = Energy Star



Ultra Slim Downlights

Item#	Description	Watt	Lumen	Volt	Dim	Kevin	Hours	Feature	Dimension (in)
87700-SU	LFX/SDL/SCT/4R/11W	11	700	120	Triac/Elv	30K/40K/50K	50000	DL	1.0(w) 4.9(d)
87701-SU	LFX/SDL/SCT/4S/11W	11	700	120	Triac/Elv	30K/40K/50K	50000	DL	0.9(h) 4.7(w) 4.7(d)
87702-SU	LFX/SDL/SCT/6R/14W	14	950	120	Triac/Elv	30K/40K/50K	50000	DL	1.0(w) 6.9(d)
87703-SU	LFX/SDL/SCT/6S/14W	14	950	120	Triac/Elv	30K/40K/50K	50000	DL	1.8(h) 6.7(w) 6.7(d)
87704-SU	LFX/SDL/SCT/8R/18W	18	1100	120	Triac/Elv	30K/40K/50K	50000	DL	1.0(w) 8.9(d)

Commercial Remodel



Item#	Description	Watt	Lumen	Volt	Dim	Kevin	Hours	Feature	Dimension (in)
87732-SU	LFX/CRD/SCT/6R/MW/D/6"	9/13/19	750/1050/1500	120-277	0-10v	30K/35K/40K	50000	WL,ES	4.5(w) 8.4(d)
87733-SU	LFX/CRD/SCT/8R/MW/D/8"	16/23/29	1500/2000/2500	120-277	0-10v	30K/35K/40K	50000	WL,ES	4.8(w) 10.0(d)
87734-SU	LFX/CRD/SCT/10R/MW/D/10"	21/29/37	2000/2500/3200	120-277	0-10v	30K/35K/40K	50000	WL,ES	5.2(w) 11.4(d)



Linear Surface Mount

Item#	Description	Watt	Lumen	Volt	Dim	Kevin	Hours	Feature	Dimension (in)
87724-SU	LFX/EC/4'/SCT/MW/D/MV	18/25/30	2484/3350/3900	120-277	0-10v	35K/40K/50K	50000	DL,DLC	3.6(h) 3.3(w) 47.3(d)
87725-SU	LFX/EC/8'/SCT/MW/D/MV	38/46/54	5244/6164/7020	120-277	0-10v	35K/40K/50K	50000	DL,DLC	3.6(h) 3.3(w) 94.2(d)



Flat Panel Mini

Item#	Description	Watt	Lumen	Volt	Dim	Kevin	Hours	Feature	Dimension (in)
87745-SU	LFX/1X1/SCT/15W/D/MV/0-10V	15	1050/1320/1200	100-277	1-10v	35K/40K/50K	50000	ETL	0.8(h) 11.8(w) 11.8(d)
85462-SU	LFX/1X4/SCT/MW/D/MV/0-10V/2PK	20/30/40	3600/4520/4000	100-277	0-10v	35K/40K/50K	50000	UL	0.4(h) 11.8(w) 47.8(d)
85460-SU	LFX/2X2/SCT/MW/D/MV/0-10V/2PK	20/30/40	3296/4120/3583	120-277	0-10v	35K/40K/50K	50000	UL	0.4(h) 23.8(w) 23.8(d)
85461-SU	LFX/2X4/SCT/MW/D/MV/0-10V/2PK	30/40/52	4646/5804/5050	120-277	0-10v	35K/40K/50K	50000	UL	0.4(h) 23.8(w) 47.8(d)



Recessed Troffer

Item#	Description	Watt	Lumen	Volt	Dim	Kevin	Hours	Feature	Dimension (in)
85214-SU	LFX/2X2/SCT/MW/MV/D	20/25/30	2640/3250/3750	120-277	0-10v	35K/40K/50K	50000	DL,DLC	2.8(h) 23.8(w) 23.8(d)
85215-SU	LFX/2X4/SCT/MW/MV/D	25/30/34	3350/3375/3400	120-277	0-10v	35K/40K/50K	50000	DL,DLC	2.8(h) 23.8(w) 47.8(d)

DIM = Dimmable

DL = Rated Damp Location

WL = Rated Wet Location

DLC = Design Lights Consortium

ES = Energy Star