


# Adjustable Flush Elbow

2" OD

The adjustable flush elbow is a must-have piece of equipment for the installation of a bar foot rail with non-traditional angles.

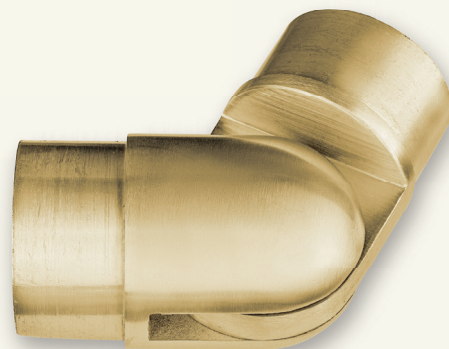

Loosen the screw on the elbow with a hex key to adjust the angle

## Standard Finishes



Brushed Brass



Polished Brass



Brushed Stainless



Polished Stainless



Antique Brass



Matte Black



Gunmetal Grey



Sunset Copper



Oil Rubbed Bronze



Inserts to the end of tubing.

*Custom finishing is available upon request.*

## Dimensions


(W <sub>1</sub> )	Width 1	2.00"
(H <sub>1</sub> )	Height 1	3.50"
(H <sub>2</sub> )	Height 2	3.10"
(D <sub>1</sub> )	Diameter 1	2.00"
(D <sub>2</sub> )	Diameter 2	1.89"

## Installation

1. Completely secure the first section of bar rail tubing to the bar face or wall.
2. Insert elbow fitting into the end of the secured section of tubing.
3. Adjust elbow fitting to the desired angle.
4. Connect the second piece of tubing to the elbow fitting.
5. Secure the second section of bar rail tubing to bar face.

Care and maintenance varies by finish. Given the nature of the product, typical wear and tear may be noticed with your bar rail over time, such as scuffs, scratches, and dirt.

Visit [Kegworks.com/care-guide](https://www.kegworks.com/care-guide) to read our guide on how to properly prep, clean, and maintain all bar rail finishes.

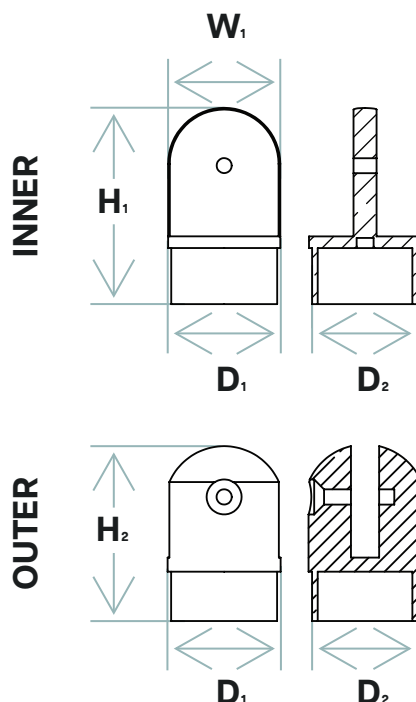

## Complete The System


Make sure to get all the necessary components to complete your bar rail system.




Tubing



End Caps



Brackets



Flanges