

Floor Mount Foot Rail Bracket

2" OD

Floor mount bar rail brackets install easily to the floor with two supports that are attached by mounting them to the surface below it.



Ideal for bar faces that cannot support or mount bracket.



Allows you to install bar foot rail closer or farther away from bar than normal.






Can be installed in either direction.

Standard Finishes

			
Brushed Brass	Polished Brass	Brushed Stainless	Polished Stainless
			
Antique Brass	Pewter	Matte Black	Gunmetal Grey
			
Sunset Copper	Oil Rubbed Bronze		

Custom Order Finishes

		
Antique Bronze	Antique Copper	Blackened Steel

Custom finishing is available upon request.

Dimensions

(H)	Height	7.00"
(W)	Width	6.75"
(D)	Diameter	2.01"
(CP)	Center Point	5.88"

Included Hardware


(2)	#10 1-1/2" Mounting Screws
(1)	#8 3/4" Self-Drilling Set Screw

Installation

1. Measure & mark holes for mounting screws.
2. Attach brackets to the floor with the appropriate mounting screws.
3. Secure tubing to bracket by fastening set screws through hole in the bottom of bracket.

Care and maintenance varies by finish. Given the nature of the product, typical wear and tear may be noticed with your bar rail over time, such as scuffs, scratches, and dirt.

Visit [Kegworks.com/care-guide](https://www.kegworks.com/care-guide) to read our guide on how to properly prep, clean, and maintain all bar rail finishes.

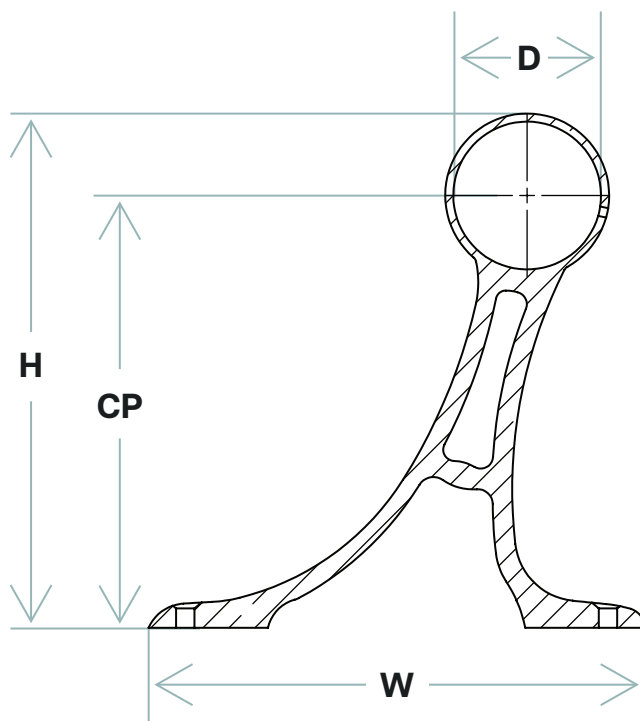

Complete The System


Make sure to get all the necessary components to complete your bar rail system.




Tubing



End Caps



Elbows



Flanges