

VERTICAL



NIMES LX



A
R
N
E
G



VERTICAL AND VERSATILE.

Arneg's R&D department has come up with a family of plug-in, multi-deck, vertical cabinets that satisfies all modern store requirements. Featuring latest-generation LX design, striking product presentation, energy efficiency, environmental friendliness, and amazing versatility thanks to a wide range of versions and excellent performance, **Nimes LX** has everything it takes to be the best.

LX DESIGN: FOCUS ON TRANSPARENCY.



REFRIGERATION THAT PROTECTS THE FUTURE.

R290 natural refrigerant boosts efficiency and reduces impact on the environment. This solution combines our commitment to sustainability with a quest for ever better performance to limit electrical energy consumption and improve safety.





□□□

The ability to satisfy different needs is clear from the versatility of the many versions available, all characterised by a high load capacity and extremely silent operation. The Nimes LX range includes open and glass-door normal temperature versions, and glass-door low temperature vertical cabinets. All versions are available in different sizes.

A NEW DIMENSION IN PRESENTATION.

An oblique, 3-D effect rear pillar and stepped shelves
optimise lighting and present products in
an extremely striking manner.



NO MORE DEFROSTING.

The normal temperature, glass-door version is equipped with **Arneg Air System** technology, an exclusive Arneg innovation that ensures a constant preservation temperature and eliminates the need to defrost.





1



2



3



4


ACCESSORIES

1 - Basket

2 - Plexiglass deck and wire partitions

3 - Telescopic bottom grilles

4 - Bottom grilles

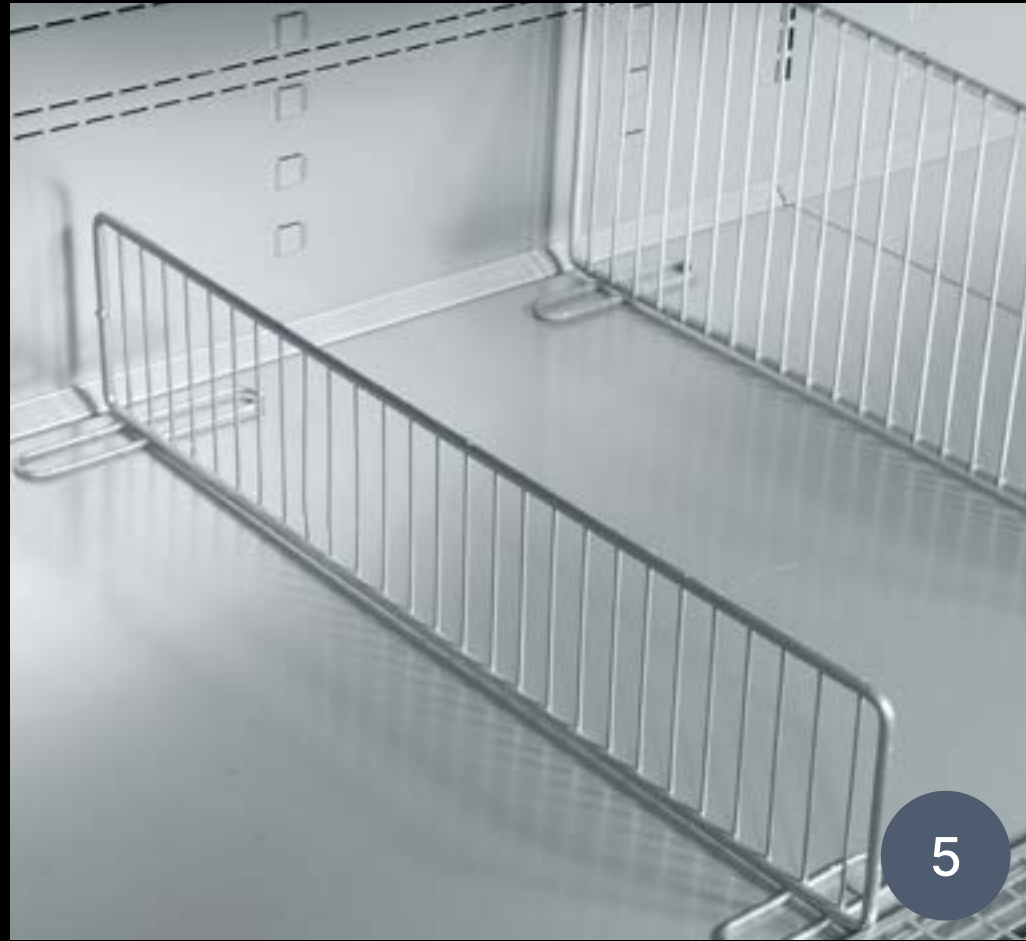

5

5 - Wire deck and basin partitions



6

6 - Led-beleuchtung



7

7 - Wire fence

8 - Plexiglass fence



8



9



10



11



12

9 - Bar price holder for IMZ shelf

10 - Clear price holder for IMZ shelf

11 - H32 price-holder for IMZ shelf

12 - H25 price-holder for IMZ shelf



13



14



15

13 - 12 mm glass shelf

14 - Ultra slim 15 mm shelf

15 - Wire price holder shelf

16 - DRSP side





16


17 - DRCI BT side

18 - DRCI TN side

19 - DRVC BT side

20 - DRVC TN side

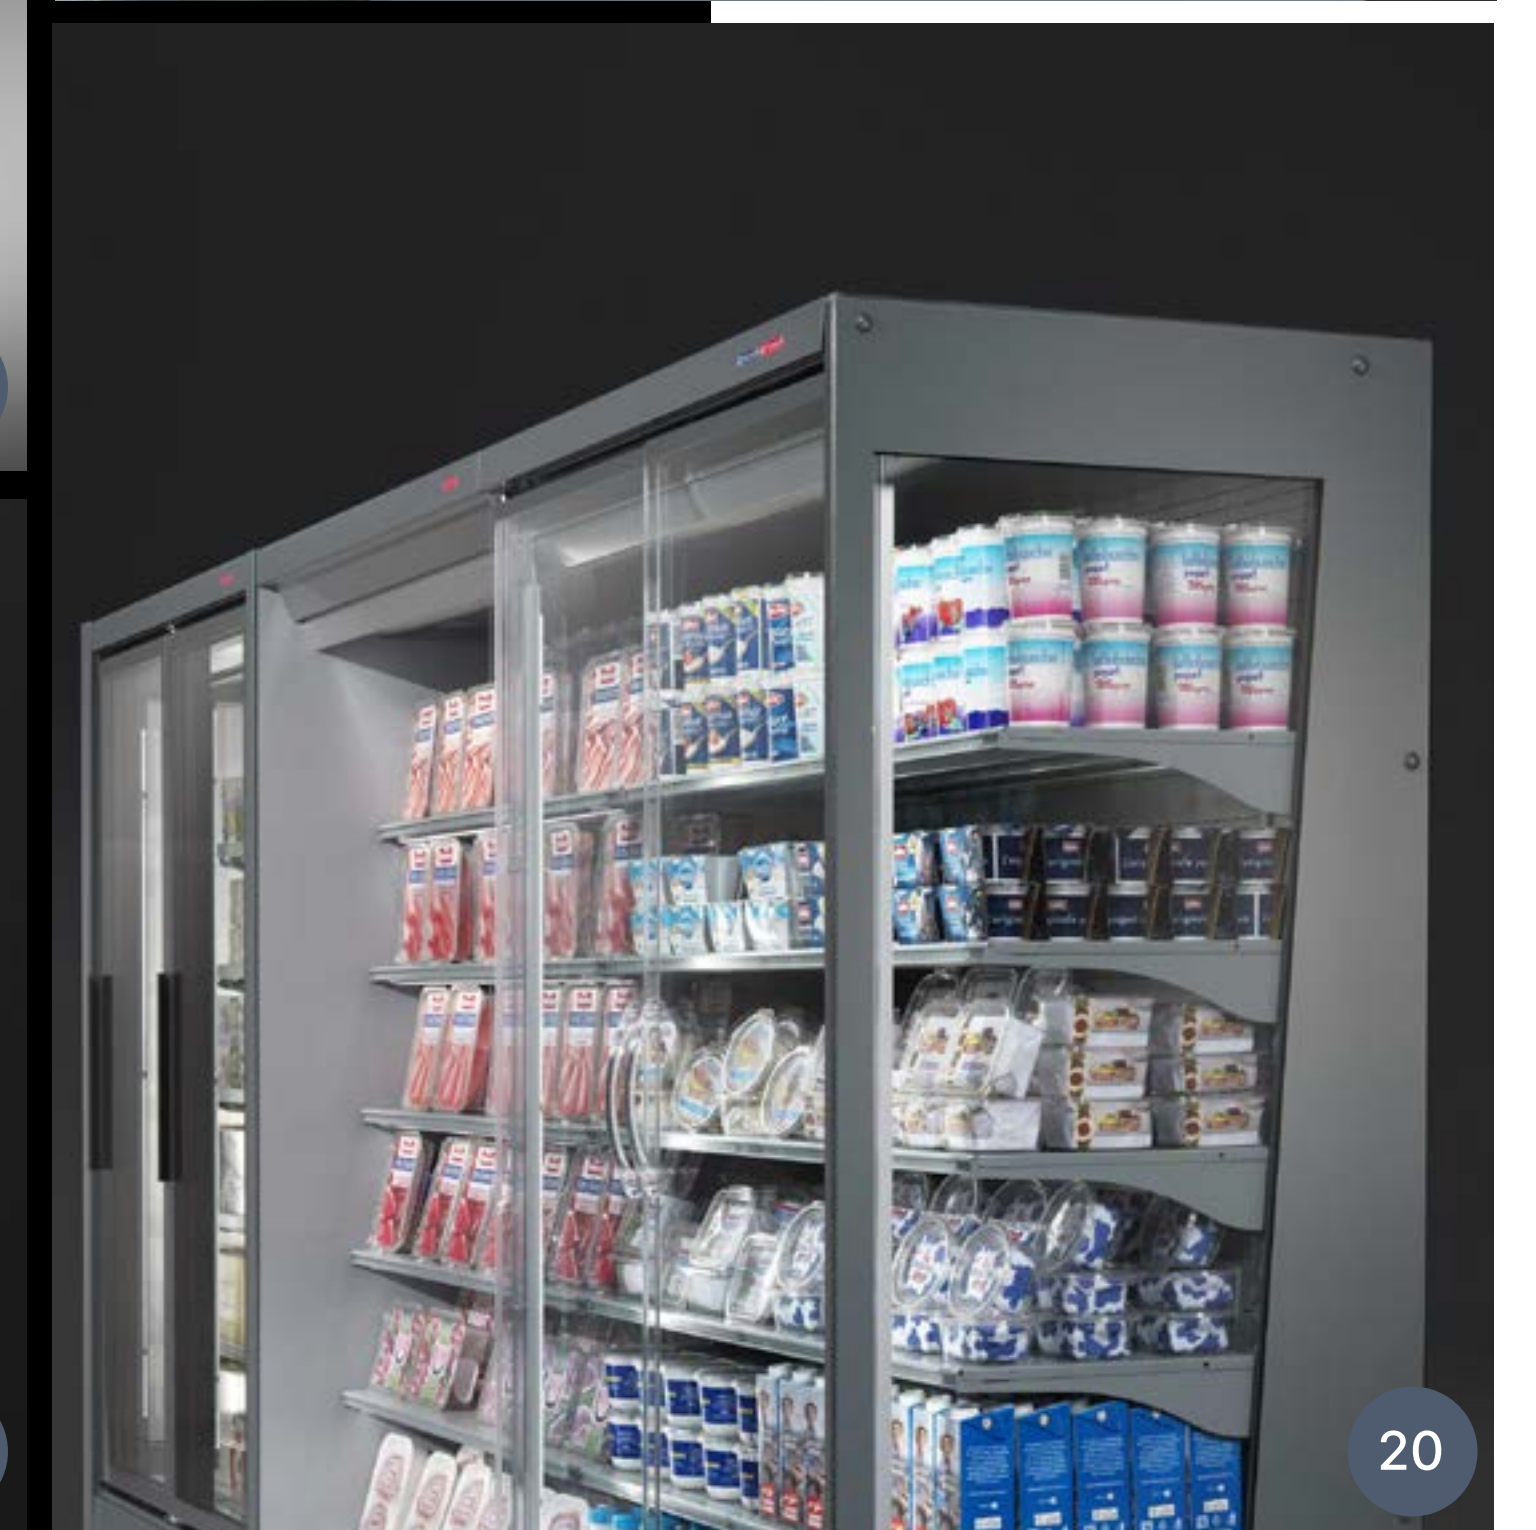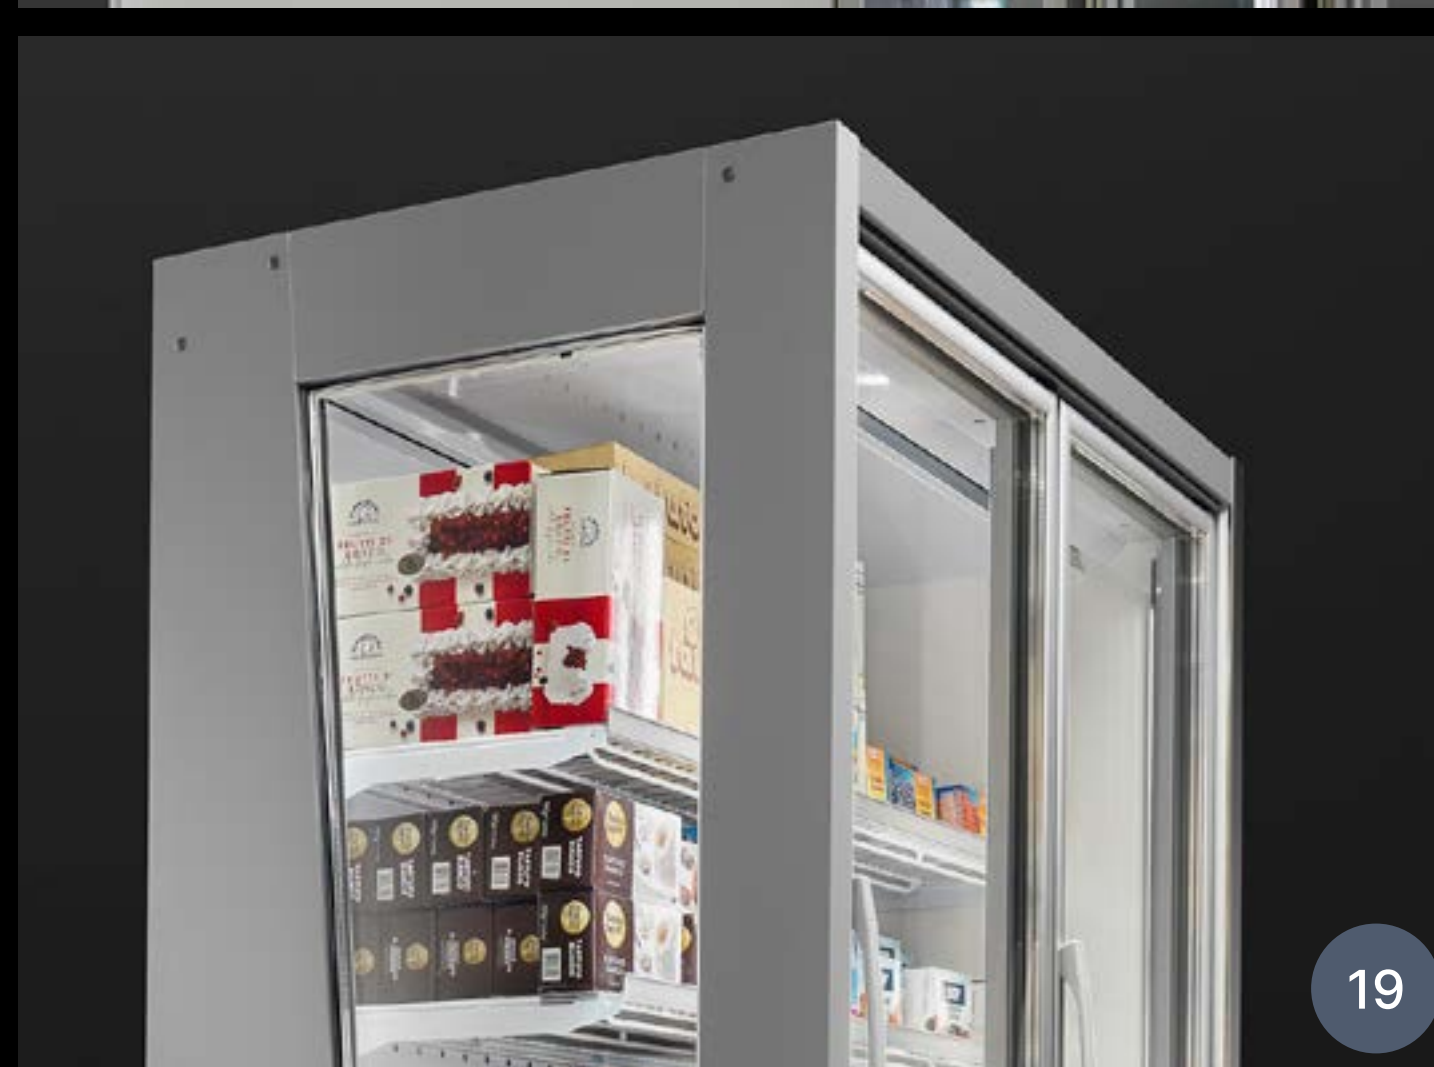

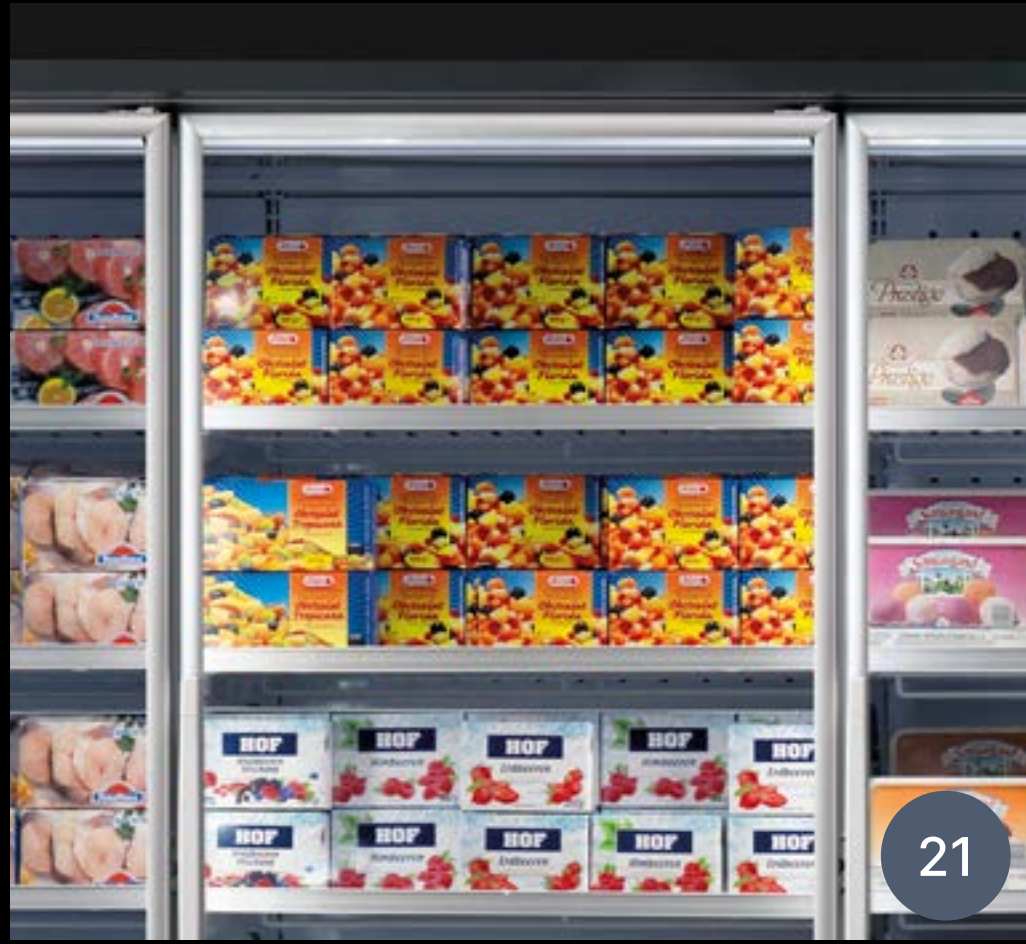

21

21 - Aluminium doors

22 - Full-vision doors

23 - Screen printed doors

24 - Night blind



22





23




24


NIMES LX VRT-A-1 TN V LINEARE I

| | | | | | |
|--|--------------|------------|---|---|-------------|
| Length without side panels (mm) | | | 1250 | | 1875 |
| Height (cm) | | 208 | | 219 | |
| Temperature class | 3 M2 | • | • | • | • |
| Preservation temperature (°C) | +2/+4 | • | • | • | • |
| Refrigerant | R290 | • | • | • | • |
| Horizontal display area* (m ²) | Depth | 75 | 2,48 | 3,73 | |
| | | 85 | 3,11 | 4,66 | |
| Energy class** | Depth | 75-85 |  |  | |


*Value referred to illustrated configurations.**The energy class may vary depending on the product configuration.

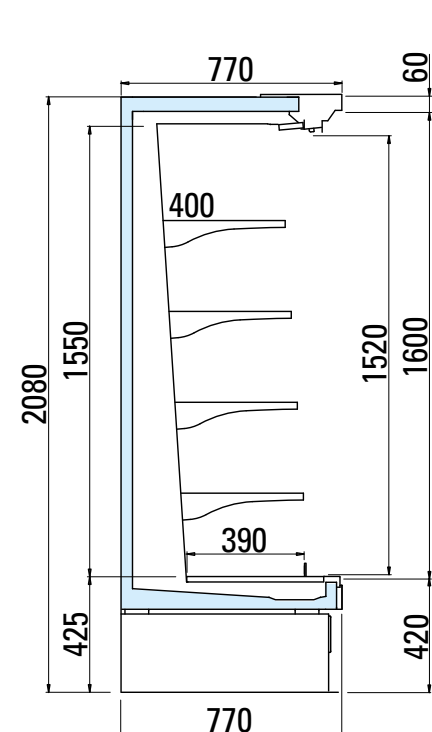


75 H208

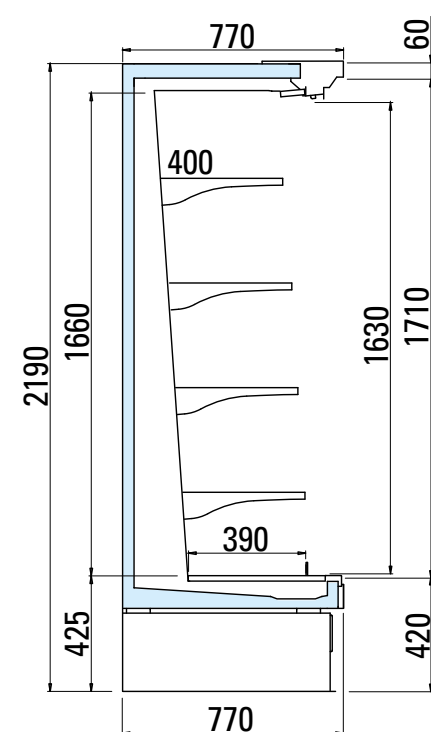

75 H219

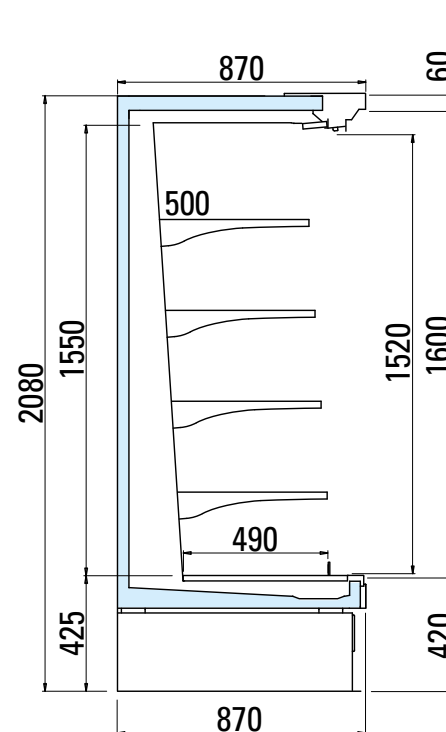

85 H208

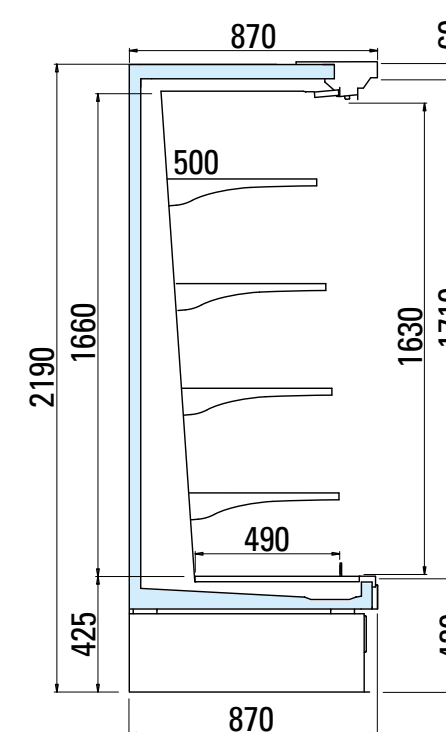


85 H219


NIMES LX VRT-C-1 TN V LINEARE I

| | | | | | | | | |
|--|--------------|-------------|------------|-------------|------------|-------------|------------|------|
| Length without side panels (mm) | | 1250 | | 1875 | | 2500 | | |
| Height (cm) | | 208 | 219 | 208 | 219 | 208 | 219 | |
| Temperature class | 3 M0 | • | • | • | • | • | • | |
| Preservation temperature (°C) | -1/+1 | • | • | • | • | • | • | |
| Refrigerant | R290 | • | • | • | • | • | • | |
| Horizontal display area* (m ²) | Depth | 75 | 2,48 | 2,48 | 3,73 | 3,73 | 4,97 | 4,97 |
| | | 85 | 3,11 | 3,11 | 4,66 | 4,66 | 6,22 | 6,22 |
| Energy class** | Depth | 75-85 | | | | | | |


*Value referred to illustrated configurations.**The energy class may vary depending on the product configuration.

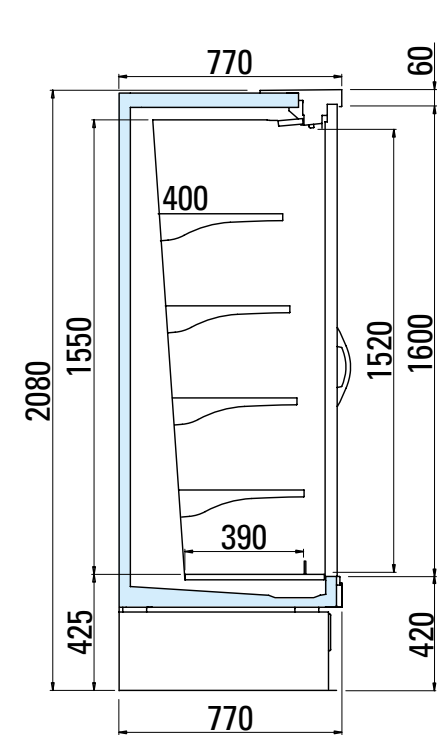


75 H208

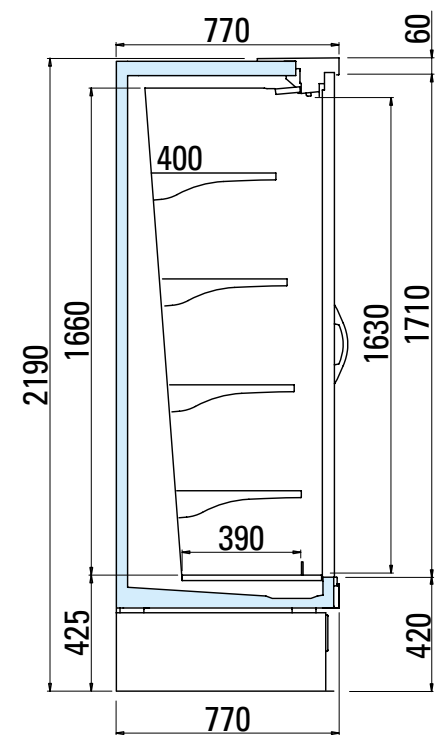

75 H219

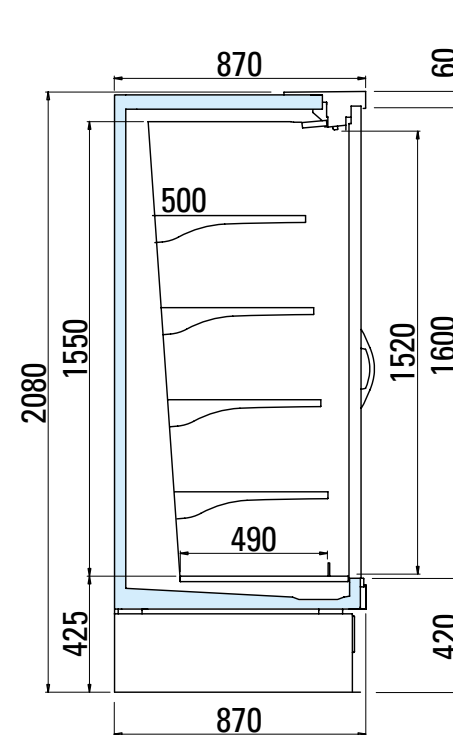



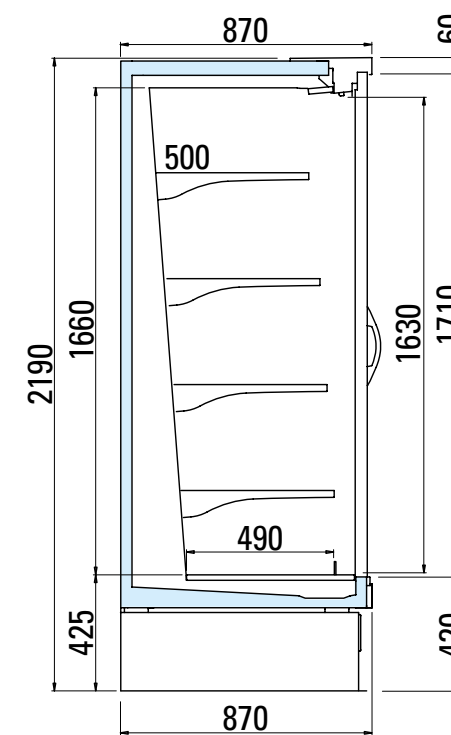


85 H208




85 H219


NIMES LX VRT-C-1 BT V LINEARE I

| | | | | | | | |
|--|----------------|----|--|---|---|---|---|
| Length without side panels (mm) | | | 1250 | | 1875 | | 2500 |
| Height (cm) | | | 208 | | 219 | | 208 |
| Temperature class | 3 L1 | | • | | • | | • |
| Preservation temperature (°C) | -22/-25 | | • | | • | | • |
| Refrigerant | R290 | | • | | • | | • |
| Horizontal display area* (m ²) | Depth | 75 | 2,27 | 2,27 | 3,41 | 3,41 | 4,54 |
| | | 75 |  |  |  |  |  |

*Value referred to illustrated configurations.**The energy class may vary depending on the product configuration.

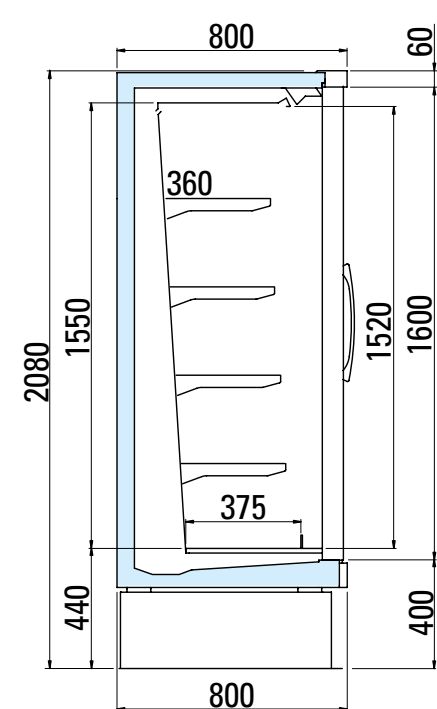

75 H208

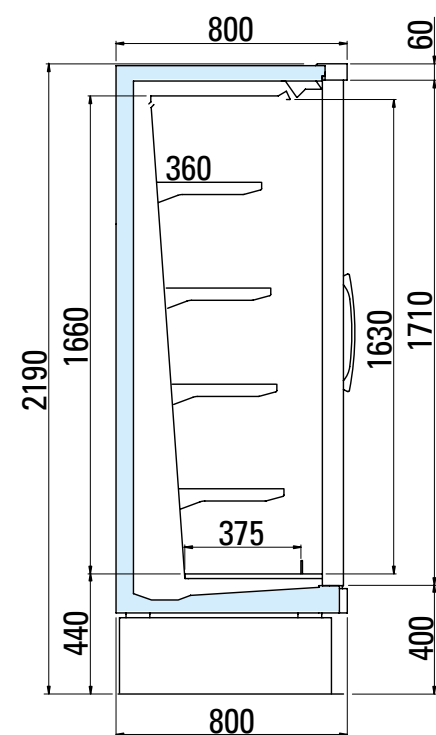

75 H219

ED. 00 - 21/04/2023

arneg[®]

WWW.ARNEG.COM



Arneg follows a policy of continuous improvement and reserves the right to update this document at any time without prior notice.