

ISLAND AND HORIZONTAL


□□□

# VELDEN LX



A  
R  
N  
E  
G

arneg®

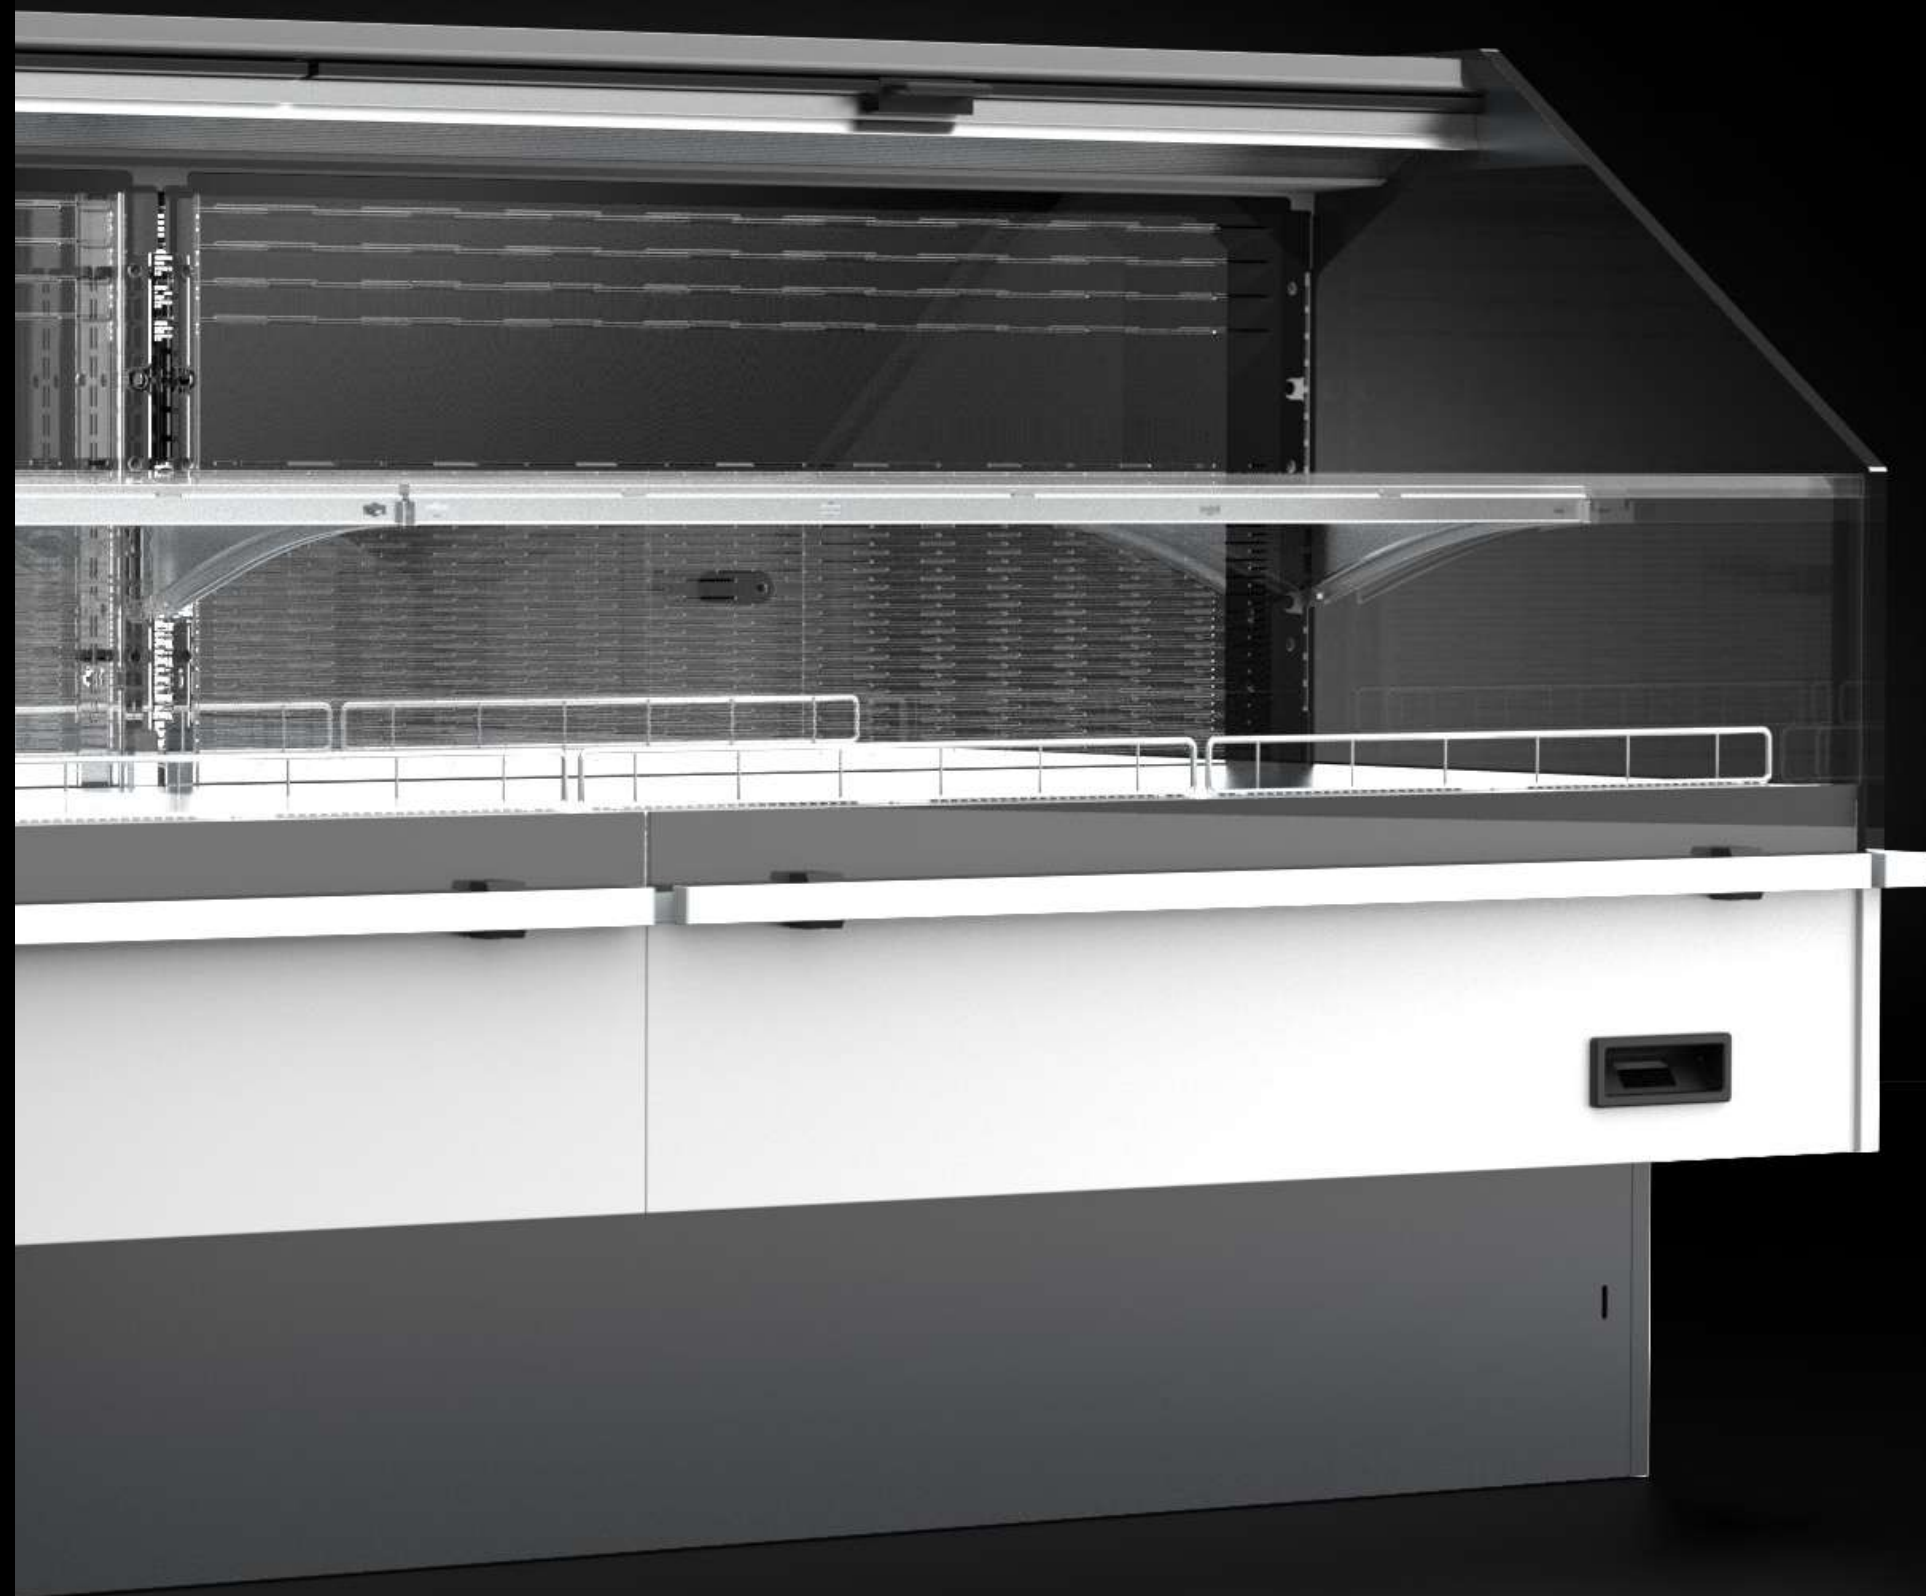

# ATTRACTIVE, SEDUCTIVE PRESENTATION.

The result of an advanced display concept aimed at stimulating the Grab&Go purchases typical of modern shopping, the new Velden LX range of semi-vertical cabinets and islands places the product centre-stage. Latest-generation LX design, great versatility and maximum functionality for an unprecedented shopping experience.



# LX DESIGN: QUALITY TAKES THE STAGE.

Clean, linear and lightweight forms enhance visibility and focus attention on the freshness of the foods. This new design also ensures a uniform look with other Arneg LX cabinets.







# SPACE FOR VERSATILITY.



The transparency and essential design of the semi-vertical version, with or without end units, guarantees exceptional visibility while the island version offers an all-round view. Thanks to its double basin, Velden LX can display a wide range of products, from pre-packed dairy, cold cuts and fruit and veg to delicate foods like meat, pre-packed fish, desserts and cold deli.

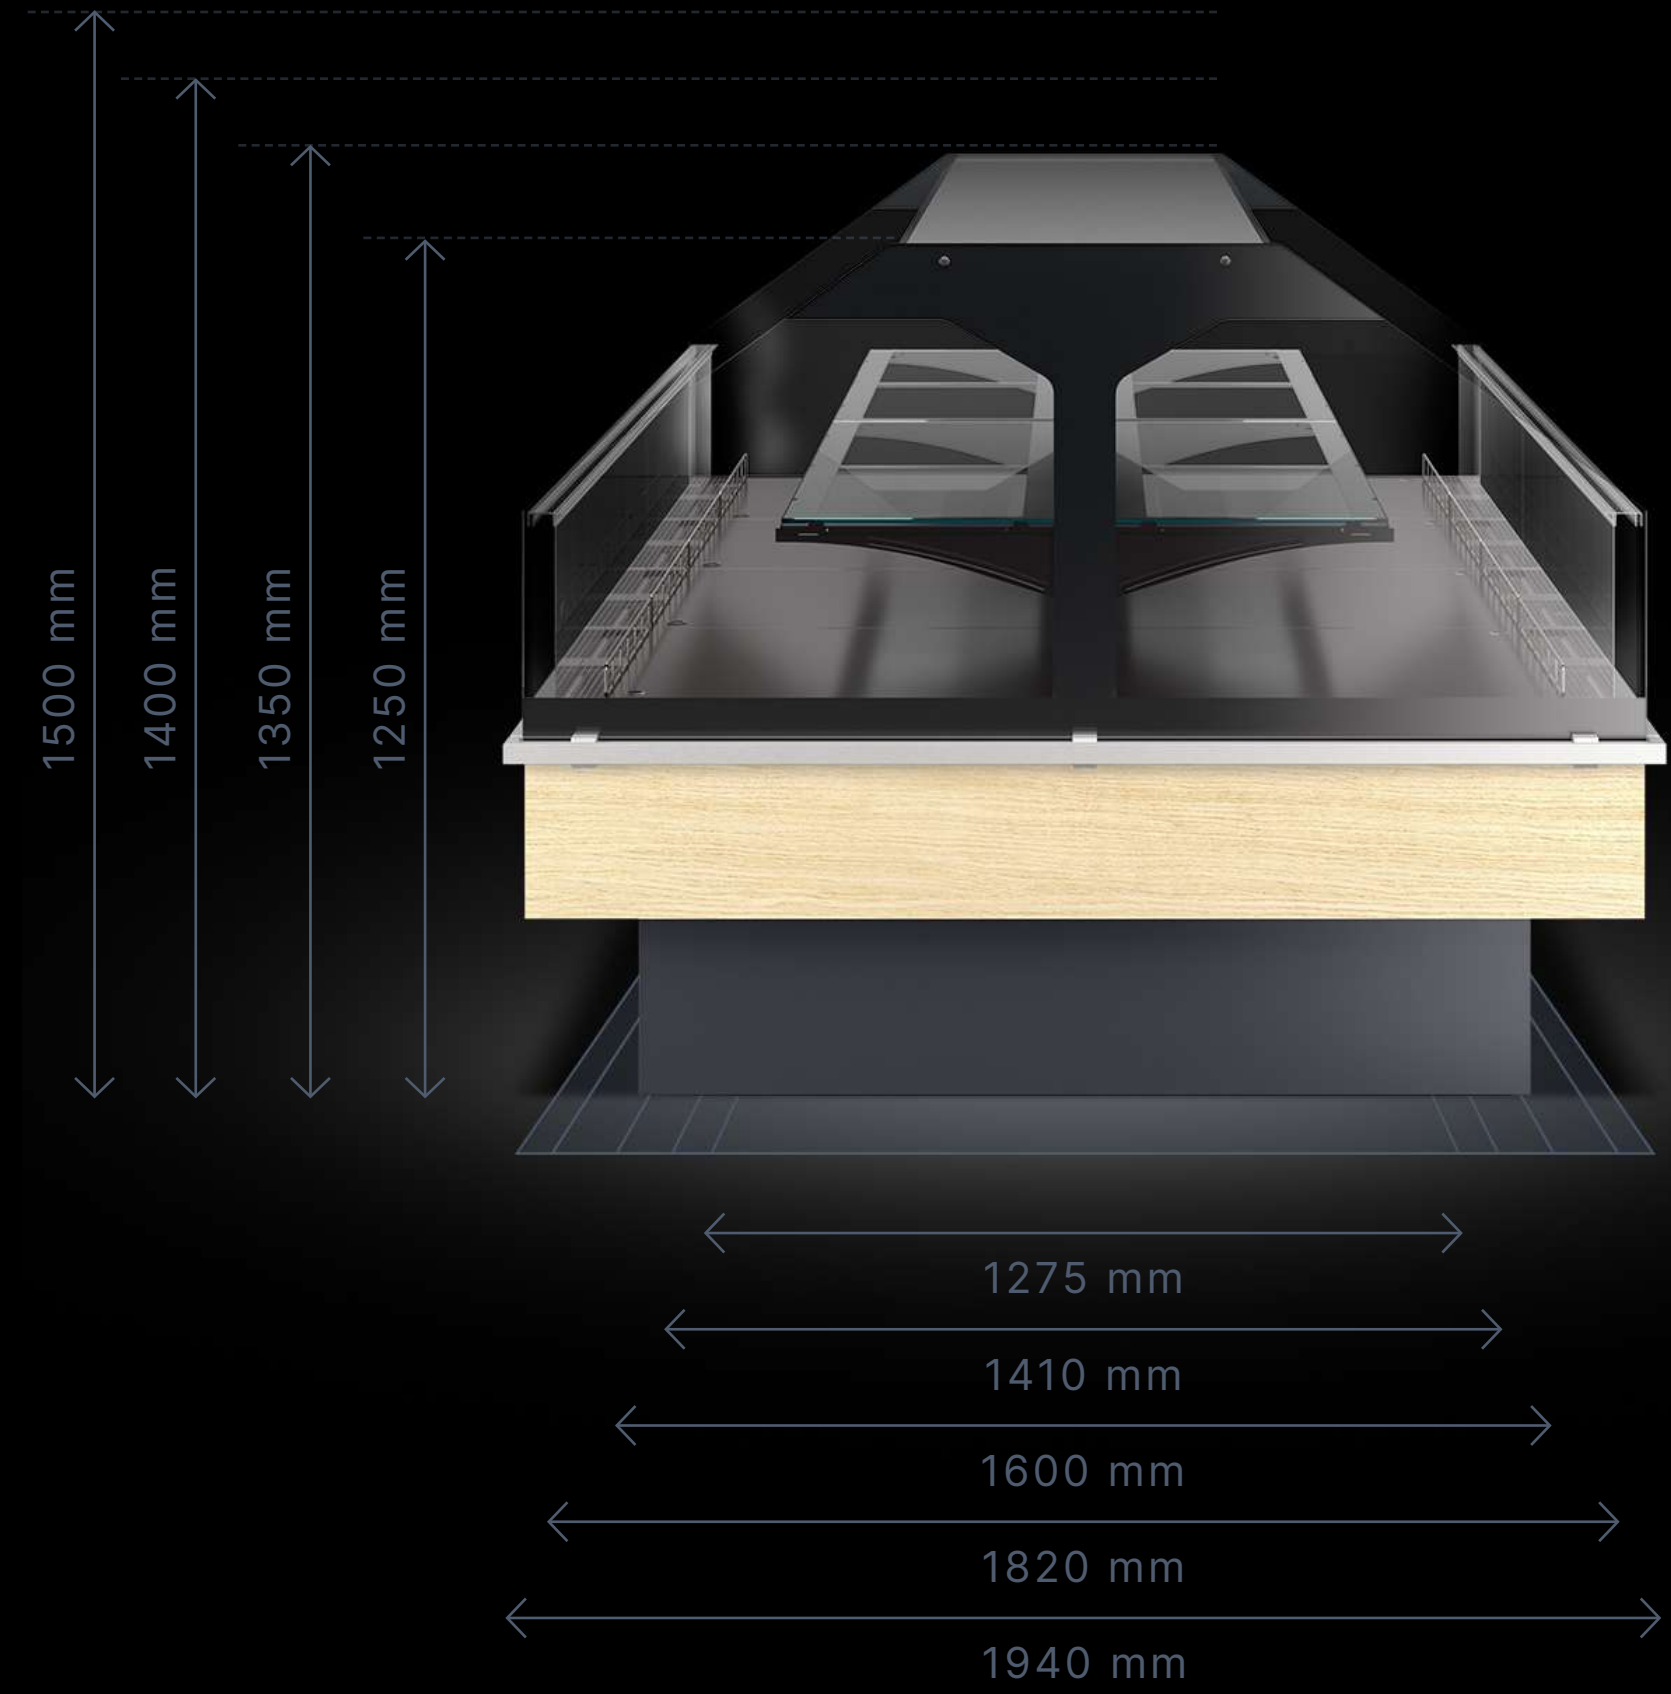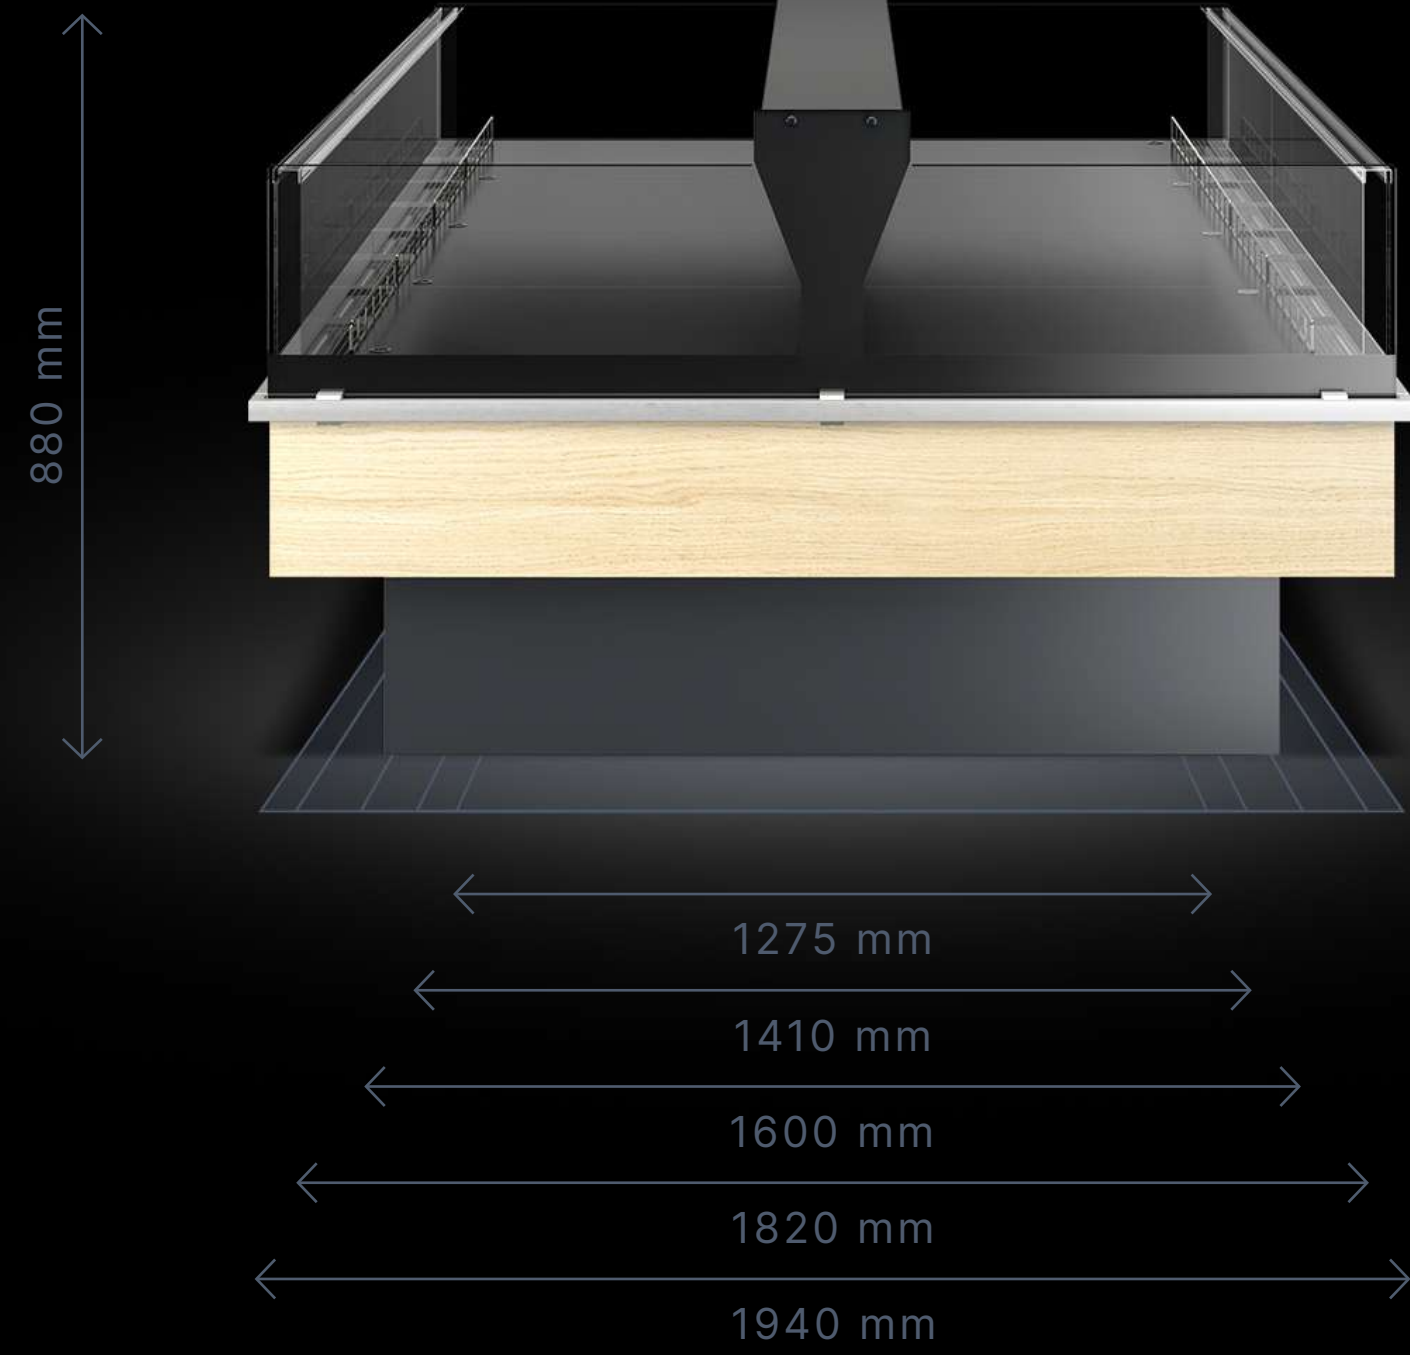



- Minimalist design
- Maximum transparency
- Integrated LED lighting option
- Double basin structure
- High load capacity
- Easy access to products





# PERFECT IN ANY SETTING.

Remote, multiplexable and available in various depths and heights, the Velden LX range can be customised in finish to match the décor of any store.

- laminates
- stainless steel
- paint finishes








1



2

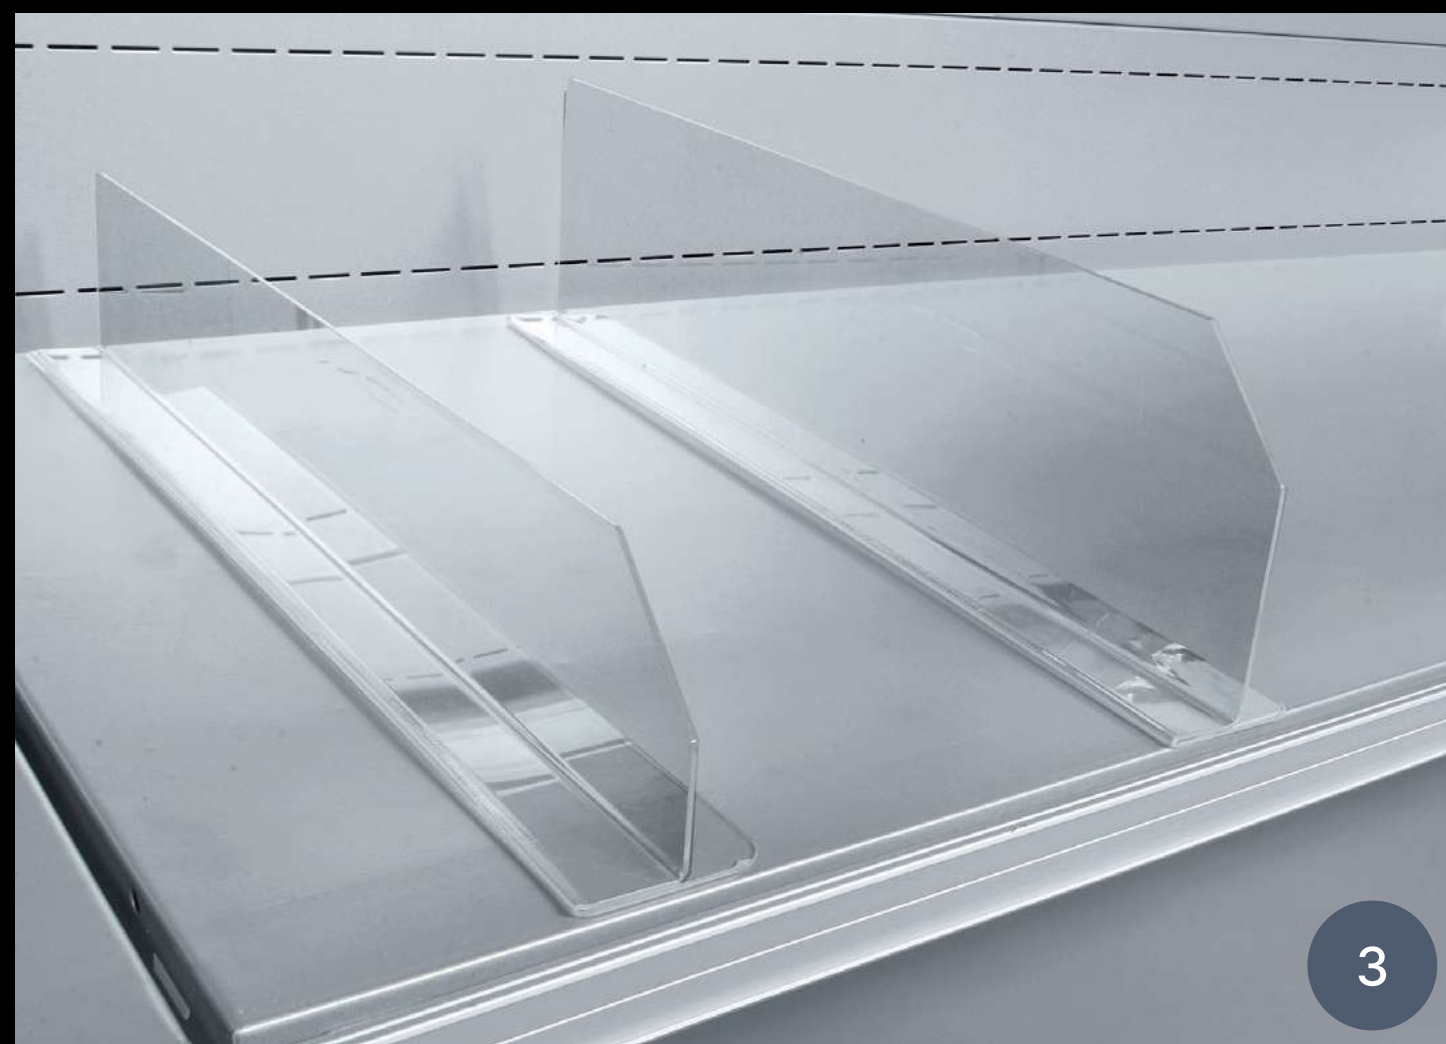

3



4

# ACCESSORIES

- 1 - H32 price-holder for IMZ shelf
- 2 - H25 price-holder for IMZ shelf
- 3 - Plexiglass partitions
- 4 - Clear price holder for IMZ shelf





5 - 12 mm glass shelf

6 - Ultra-slim 15 mm shelf

7 - Wire fence








8



9

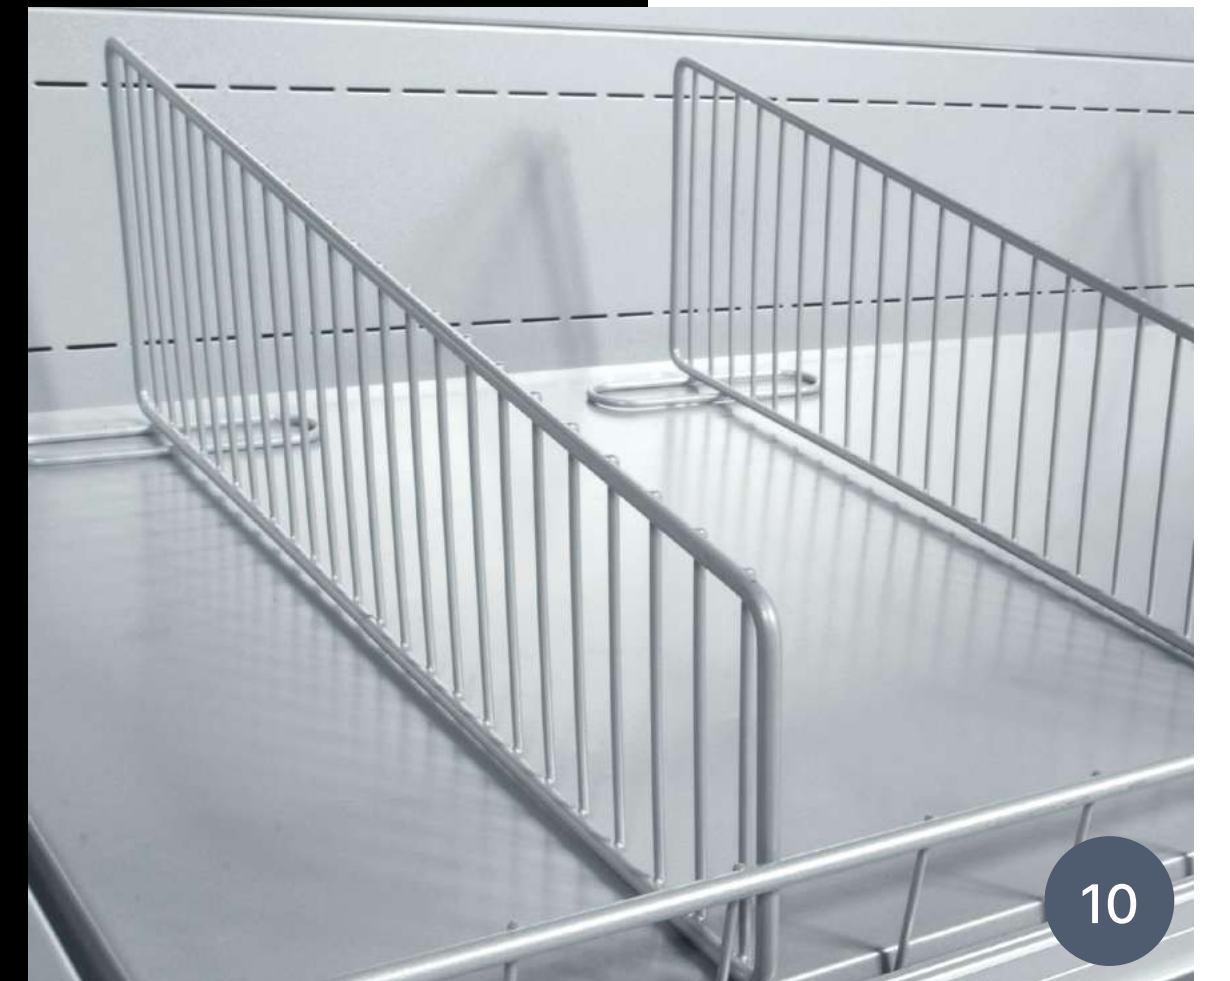


10

8 - Rectangular bumper

9 - Clear shelf

10 - Wire basin partitions

11 - Wire shelf

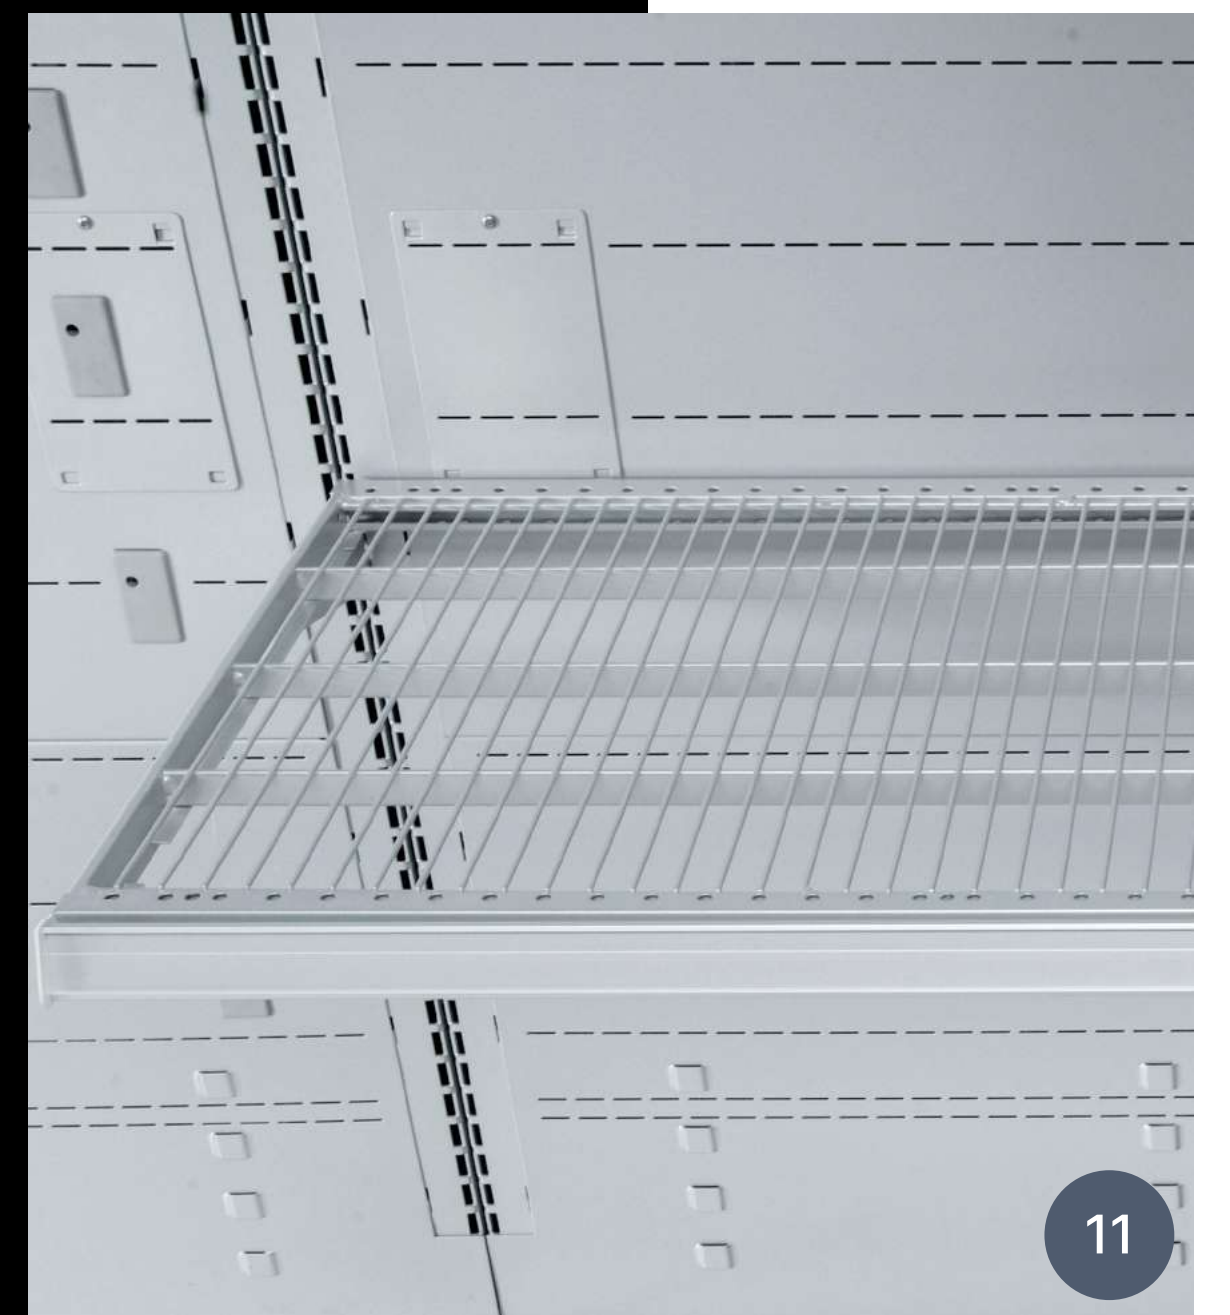

11





12

12 - Plexiglass fence

13 - Bar price holder  
for IMZ shelf

14 - Manual night blind



13




14




VELDEN LX ISL-A-2 TN V LINEARE R

| Length without side panels (mm) |                                            | 1250                                            | 1875                                            | 2500                                            | 3750                                            |      |
|---------------------------------|--------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|------|
| Temperature class               | 3M1                                        | •                                               | •                                               | •                                               | •                                               |      |
|                                 | 3M2                                        | •                                               | •                                               | •                                               | •                                               |      |
| Preservation temperature (°C)   | 0/+2                                       | •                                               | •                                               | •                                               | •                                               |      |
|                                 | +2/+4                                      | •                                               | •                                               | •                                               | •                                               |      |
| Horizontal display area* (m²)   | Depth                                      | 130                                             | 1,2                                             | 1,8                                             | 2,4                                             | 3,6  |
|                                 |                                            | 140                                             | 1,38                                            | 2,06                                            | 2,75                                            | 4,13 |
|                                 |                                            | 160                                             | 1,6                                             | 2,4                                             | 3,2                                             | 4,8  |
|                                 |                                            | 180                                             | 1,88                                            | 2,81                                            | 3,75                                            | 5,63 |
|                                 |                                            | 194                                             | 2,03                                            | 3,04                                            | 4,05                                            | 6,08 |
| Energy class**                  | Depth<br>130 - 140<br>- 160 - 180<br>- 194 | <div><div>A<br/>T<br/>G</div><div>F</div></div> | <div><div>A<br/>T<br/>G</div><div>F</div></div> | <div><div>A<br/>T<br/>G</div><div>F</div></div> | <div><div>A<br/>T<br/>G</div><div>F</div></div> |      |


\*Value referred to illustrated configurations. \*\*The energy class may vary depending on the product configuration.

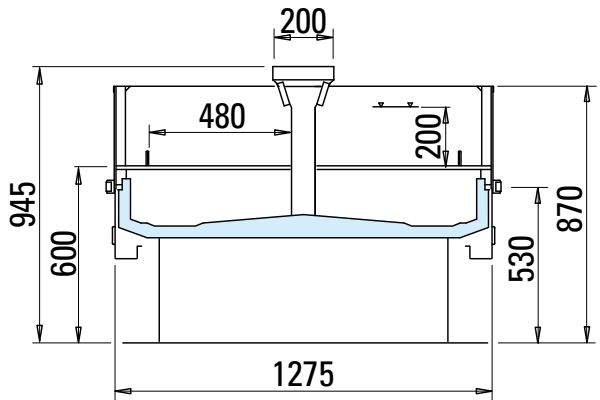


130

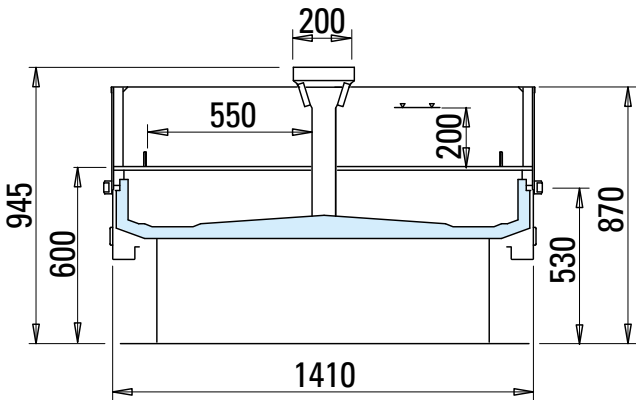


140

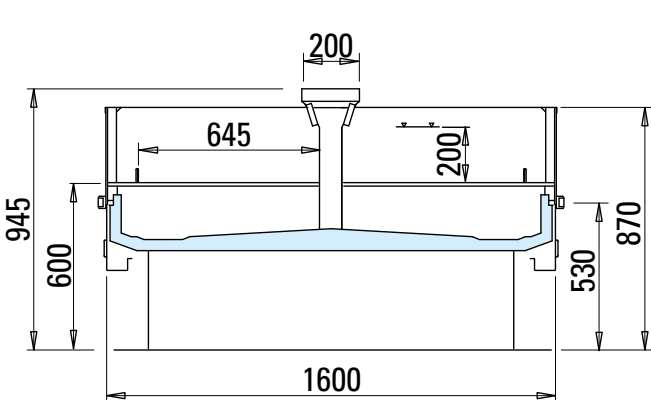

160

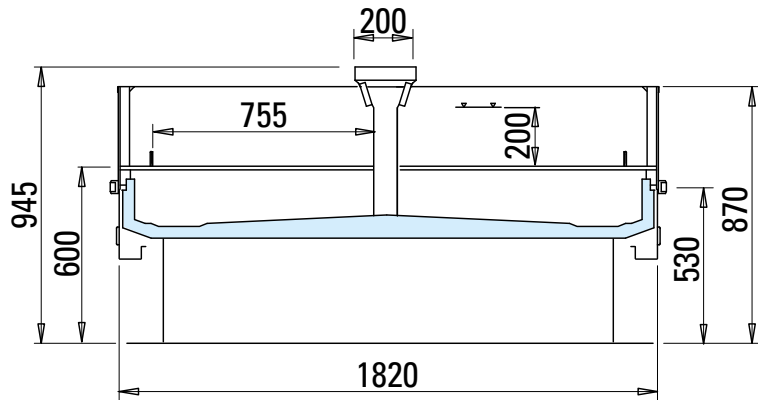

180

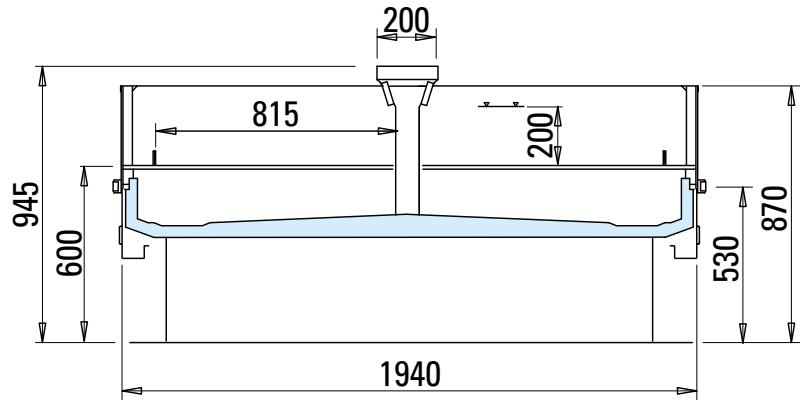


194



VELDEN LX ISL-A-2 TN V TESTATA R

|                                 |       |                                                 |                                                 |                                                 |                                                 |                                                 |
|---------------------------------|-------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|
| Length without side panels (mm) |       | 1284                                            | 1419                                            | 1610                                            | 1832                                            | 1952                                            |
| Temperature class               | 3M1   | •                                               | •                                               | •                                               | •                                               | •                                               |
|                                 | 3M2   | •                                               | •                                               | •                                               | •                                               | •                                               |
| Preservation temperature (°C)   | 0/+2  | •                                               | •                                               | •                                               | •                                               | •                                               |
|                                 | +2/+4 | •                                               | •                                               | •                                               | •                                               | •                                               |
| Horizontal display area* (m²)   |       | 0,77                                            | 0,86                                            | 0,99                                            | 1,13                                            | 1,21                                            |
| Energy class**                  |       | <div><div>A</div><div>G</div><div>F</div></div> | <div><div>A</div><div>G</div><div>F</div></div> | <div><div>A</div><div>G</div><div>F</div></div> | <div><div>A</div><div>G</div><div>F</div></div> | <div><div>A</div><div>G</div><div>F</div></div> |

\*Value referred to illustrated configurations. \*\*The energy class may vary depending on the product configuration.

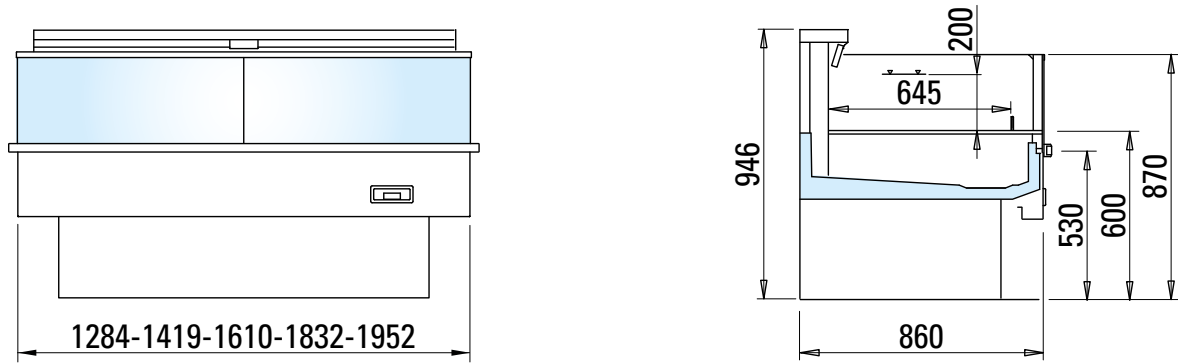





VELDEN LX ISL-C-2 TN V LINEARE R

| Length without side panels (mm) |       | 1250                     | 1875                                                        | 2500                                                        | 3750                                                        |                                                             |
|---------------------------------|-------|--------------------------|-------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|
| Temperature class               |       | 3M1                      | •                                                           | •                                                           | •                                                           |                                                             |
| Preservation temperature (°C)   |       | 0/+2                     | •                                                           | •                                                           | •                                                           |                                                             |
| Horizontal display area* (m²)   | Depth | 130                      | -                                                           | 1,8                                                         | 2,4                                                         | 4,65                                                        |
|                                 |       | 140                      | 1,38                                                        | 2,06                                                        | 2,75                                                        | 4,13                                                        |
|                                 |       | 160                      | 1,61                                                        | 2,42                                                        | 3,23                                                        | 4,84                                                        |
|                                 |       | 180                      | 1,89                                                        | 2,84                                                        | 3,78                                                        | 5,67                                                        |
|                                 |       | 194                      | 2,04                                                        | 3,06                                                        | 4,08                                                        | 6,12                                                        |
|                                 |       |                          |                                                             |                                                             |                                                             |                                                             |
| Energy class**                  | Depth | 130                      | -                                                           | <div><div>A</div><div>↑</div><div>G</div><div>D</div></div> | <div><div>A</div><div>↑</div><div>G</div><div>D</div></div> | <div><div>A</div><div>↑</div><div>G</div><div>D</div></div> |
|                                 |       | 140 - 160<br>- 180 - 194 | <div><div>A</div><div>↑</div><div>G</div><div>D</div></div> | <div><div>A</div><div>↑</div><div>G</div><div>D</div></div> | <div><div>A</div><div>↑</div><div>G</div><div>D</div></div> | <div><div>A</div><div>↑</div><div>G</div><div>D</div></div> |


\*Value referred to illustrated configurations. \*\*The energy class may vary depending on the product configuration.

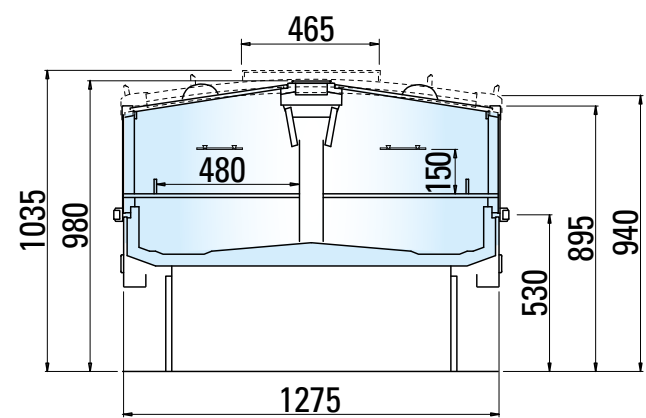


130

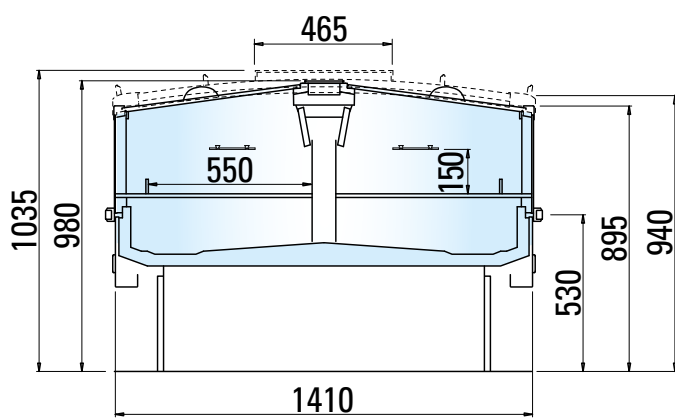


140

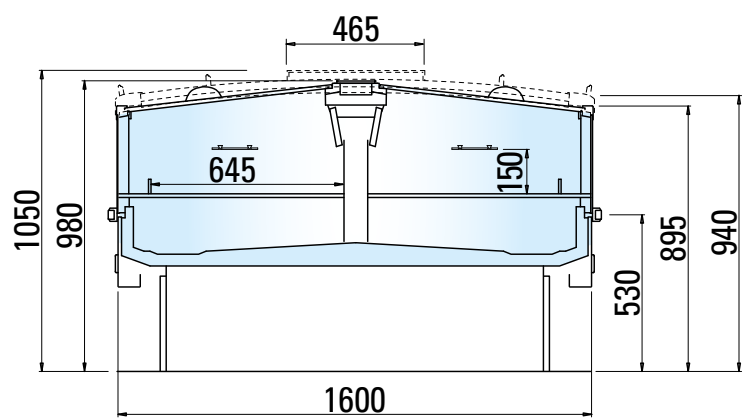

160

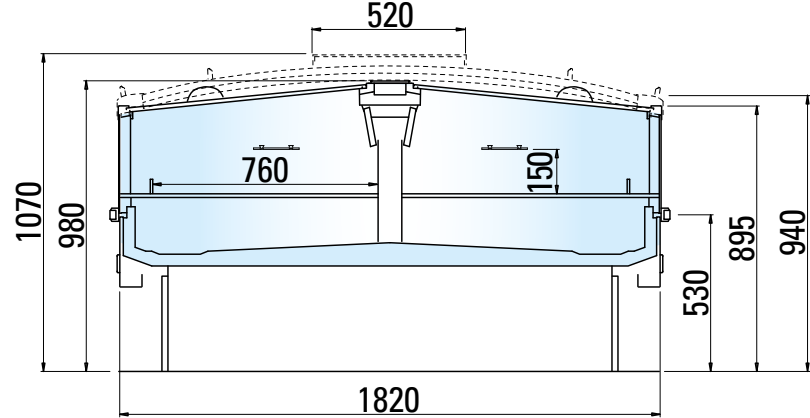

180

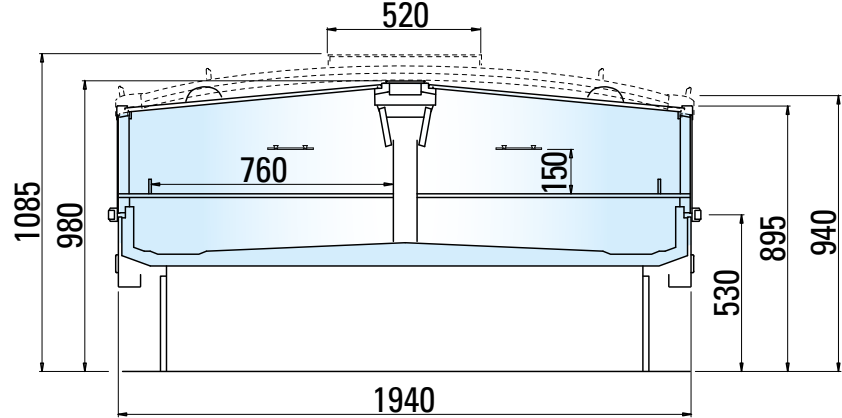


194



VELDEN LX ISL-A-2 TN V TESTATA R

| Length without side panels (mm) |       | 1284                                | 1419                                | 1610                                | 1832                                | 1952                                |
|---------------------------------|-------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Temperature class               | 3M1   | •                                   | •                                   | •                                   | •                                   | •                                   |
|                                 | 3M2   | •                                   | •                                   | •                                   | •                                   | •                                   |
| Preservation temperature (°C)   | 0/+2  | •                                   | •                                   | •                                   | •                                   | •                                   |
|                                 | +2/+4 | •                                   | •                                   | •                                   | •                                   | •                                   |
| Horizontal display area* (m²)   |       | 0,77                                | 0,86                                | 0,99                                | 1,13                                | 1,21                                |
| Energy class**                  |       | <div><div>A</div><div>F</div></div> | <div><div>A</div><div>F</div></div> | <div><div>A</div><div>F</div></div> | <div><div>A</div><div>F</div></div> | <div><div>A</div><div>F</div></div> |

\*Value referred to illustrated configurations. \*\*The energy class may vary depending on the product configuration.

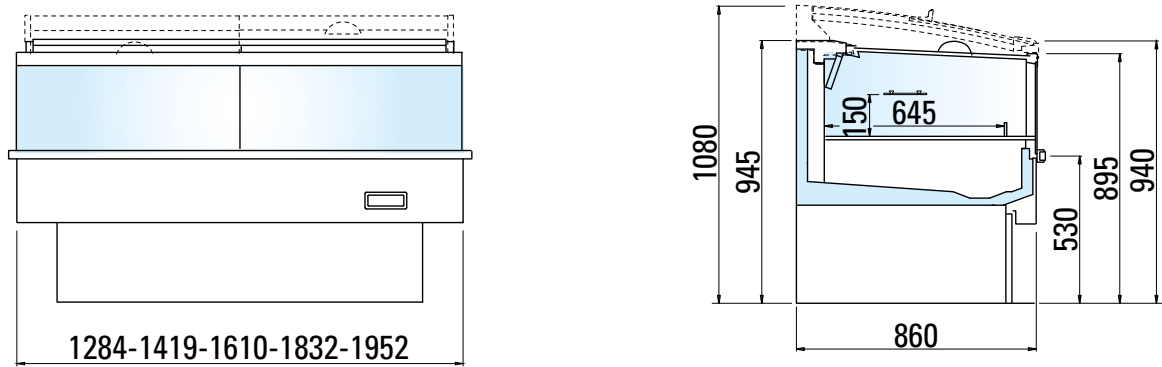





VELDEN LX ISL-A-2-MX TN V LINEARE R

| Length without side panels (mm) |           | 1875                                             | 2500  | 3750  |
|---------------------------------|-----------|--------------------------------------------------|-------|-------|
| Temperature class               | 3M1       | •                                                | •     | •     |
|                                 | 3M2       | •                                                | •     | •     |
| Preservation temperature (°C)   | 0/+2      | •                                                | •     | •     |
|                                 | +2/+4     | •                                                | •     | •     |
| Horizontal display area* (m²)   | Depth 130 | 1,8                                              | 2,4   | 3,59  |
|                                 | 140       | 2,06                                             | 2,75  | 4,13  |
|                                 | 160       | 2,42                                             | 3,23  | 4,84  |
|                                 | 180       | 2,84                                             | 3,78  | 5,67  |
|                                 | 194       | 3,06                                             | 4,08  | 6,12  |
| Energy class**                  |           | Depth 130 - 140<br>- 160 - 180<br>- 194<br>A+G F | A+G F | A+G F |


\*Value referred to illustrated configurations. \*\*The energy class may vary depending on the product configuration.

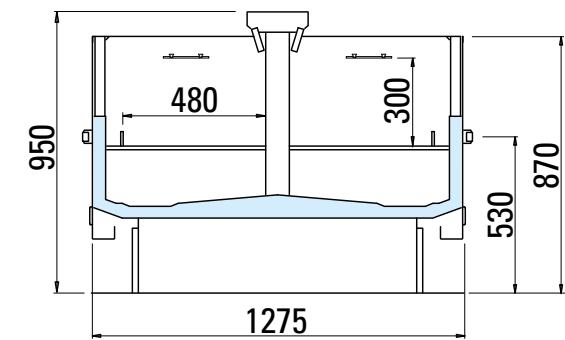


130

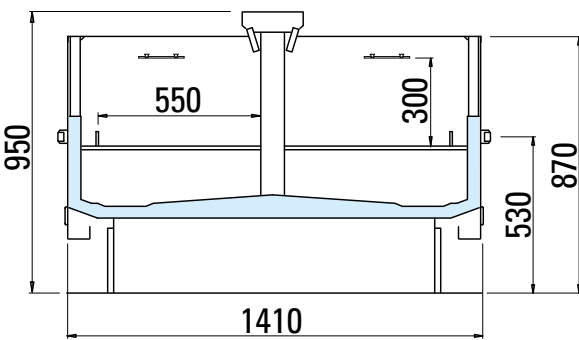


140

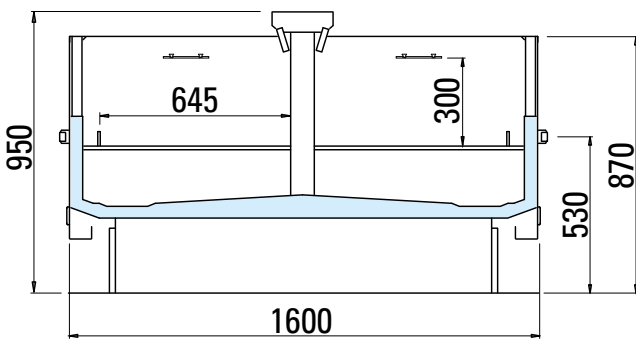

160

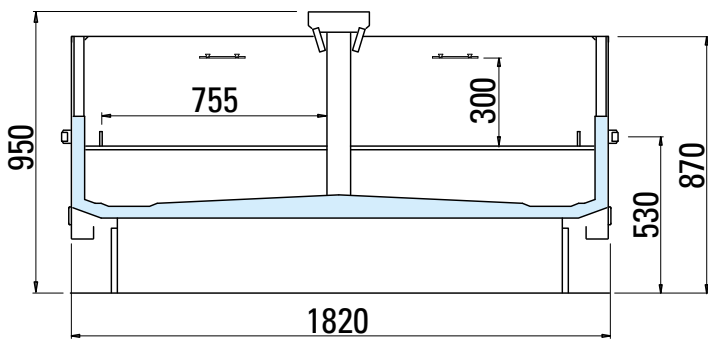

180

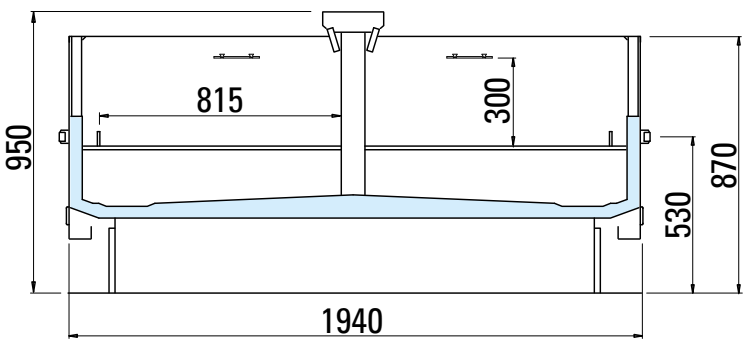


194



VELDEN LX ISL-A-2-MX TN V TESTATA R

|                                 |       |                                                 |                                                 |                                                 |                                                 |                                                 |
|---------------------------------|-------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|
| Length without side panels (mm) |       | 1284                                            | 1419                                            | 1610                                            | 1832                                            | 1952                                            |
| Temperature class               | 3M1   | •                                               | •                                               | •                                               | •                                               | •                                               |
|                                 | 3M2   | •                                               | •                                               | •                                               | •                                               | •                                               |
| Preservation temperature (°C)   | 0/+2  | •                                               | •                                               | •                                               | •                                               | •                                               |
|                                 | +2/+4 | •                                               | •                                               | •                                               | •                                               | •                                               |
| Horizontal display area* (m²)   |       | 0,75                                            | 0,84                                            | 0,96                                            | 1,1                                             | 1,18                                            |
| Energy class**                  |       | <div><div>A</div><div>F</div><div>G</div></div> | <div><div>A</div><div>F</div><div>G</div></div> | <div><div>A</div><div>F</div><div>G</div></div> | <div><div>A</div><div>F</div><div>G</div></div> | <div><div>A</div><div>F</div><div>G</div></div> |

\*Value referred to illustrated configurations. \*\*The energy class may vary depending on the product configuration.

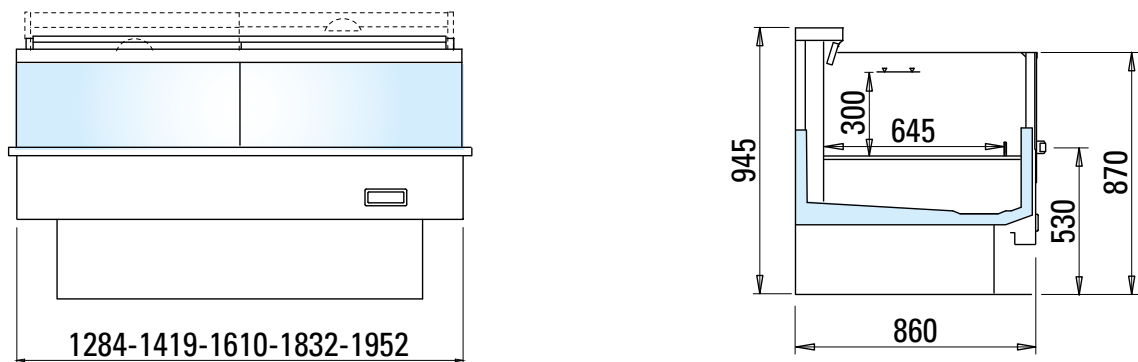





VELDEN LX ISL-C-2-MX TN V LINEARE R

| Length without side panels (mm) |                            | 1875                                  | 2500                                  | 3750                                  |
|---------------------------------|----------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Temperature class               | 3M1                        | •                                     | •                                     | •                                     |
| Preservation temperature (°C)   | 0/+2                       | •                                     | •                                     | •                                     |
| Horizontal display area* (m²)   | profondità 160             | 2,42                                  | 3,23                                  | 4,84                                  |
|                                 | 180                        | 2,84                                  | 3,78                                  | 5,67                                  |
|                                 | 194                        | 3,06                                  | 4,08                                  | 6,12                                  |
| Energy class**                  | profondità 160 - 180 - 194 | <div><div>A↑G</div><div>D</div></div> | <div><div>A↑G</div><div>D</div></div> | <div><div>A↑G</div><div>D</div></div> |


\*Value referred to illustrated configurations. \*\*The energy class may vary depending on the product configuration.

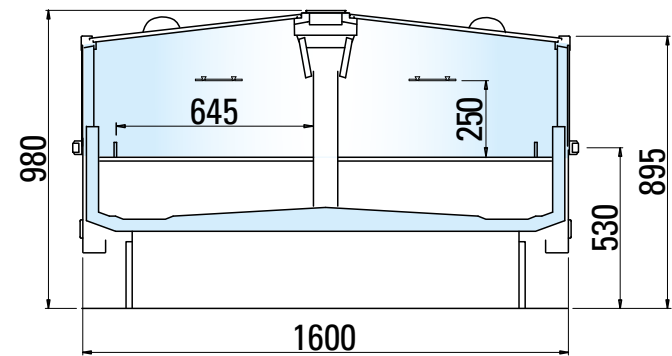

160

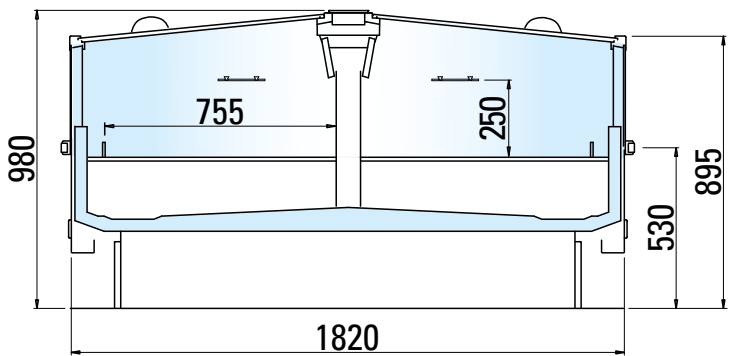

180

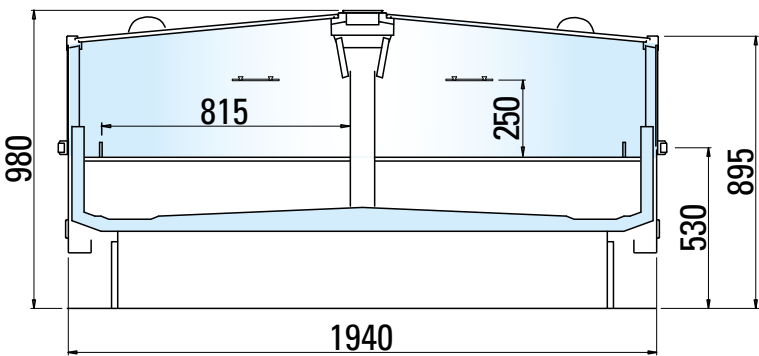


194



| VELDEN LX ISL-C-2-MX TN V TESTATA R |      |                            |                            |                            |
|-------------------------------------|------|----------------------------|----------------------------|----------------------------|
| Length without side panels (mm)     |      | 1610                       | 1832                       | 1952                       |
| Temperature class                   | 3M1  | •                          | •                          | •                          |
| Preservation temperature (°C)       | 0/+2 | •                          | •                          | •                          |
| Horizontal display area* (m²)       |      | 0,96                       | 1,1                        | 1,18                       |
| Energy class**                      |      | <div><div>A↑G</div>D</div> | <div><div>A↑G</div>D</div> | <div><div>A↑G</div>D</div> |

\*Value referred to illustrated configurations. \*\*The energy class may vary depending on the product configuration.

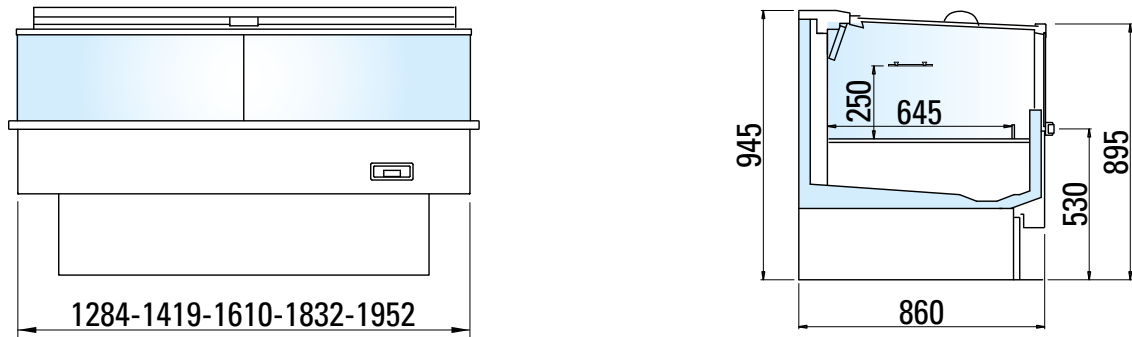





VELDEN LX SVT-A-2 TN V LINEARE R

| Length without side panels (mm) |                                            | 1875                                |      |      |     | 2500                                |      |     |      | 3750                                |     |     |     |
|---------------------------------|--------------------------------------------|-------------------------------------|------|------|-----|-------------------------------------|------|-----|------|-------------------------------------|-----|-----|-----|
| Height (cm)                     |                                            | 125                                 | 135  | 140  | 150 | 125                                 | 135  | 140 | 150  | 125                                 | 135 | 140 | 150 |
| Temperature class               | 3M1                                        | •                                   | •    | •    | •   | •                                   | •    | •   | •    | •                                   | •   | •   | •   |
|                                 | 3M2                                        | •                                   | •    | •    | •   | •                                   | •    | •   | •    | •                                   | •   | •   | •   |
| Preservation temperature (°C)   | 0/+2                                       | •                                   | •    | •    | •   | •                                   | •    | •   | •    | •                                   | •   | •   | •   |
|                                 | +2/+4                                      | •                                   | •    | •    | •   | •                                   | •    | •   | •    | •                                   | •   | •   | •   |
| Horizontal display area* (m²)   | Depth                                      | 130                                 | 2,93 | 3,86 |     | 3,9                                 | 5,15 |     | 5,85 | 7,73                                |     |     |     |
|                                 |                                            | 140                                 | 3,19 | 4,13 |     | 4,25                                | 5,5  |     | 6,38 | 8,25                                |     |     |     |
|                                 |                                            | 160                                 | 3,9  | 5,03 |     | 5,2                                 | 6,7  |     | 7,8  | 10,05                               |     |     |     |
|                                 |                                            | 180                                 | 4,31 | 5,44 |     | 5,75                                | 7,25 |     | 8,63 | 10,88                               |     |     |     |
|                                 |                                            | 194                                 | 4,91 | 6,41 |     | 6,55                                | 8,55 |     | 9,83 | 12,83                               |     |     |     |
| Energy class**                  | Depth<br>130 - 140<br>- 160 - 180<br>- 194 | <div><div>A</div><div>F</div></div> |      |      |     | <div><div>A</div><div>F</div></div> |      |     |      | <div><div>A</div><div>F</div></div> |     |     |     |


\*Value referred to illustrated configurations. \*\*The energy class may vary depending on the product configuration.

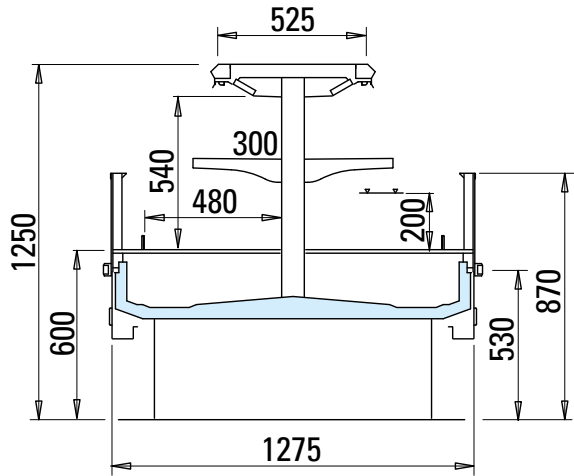


130 H125

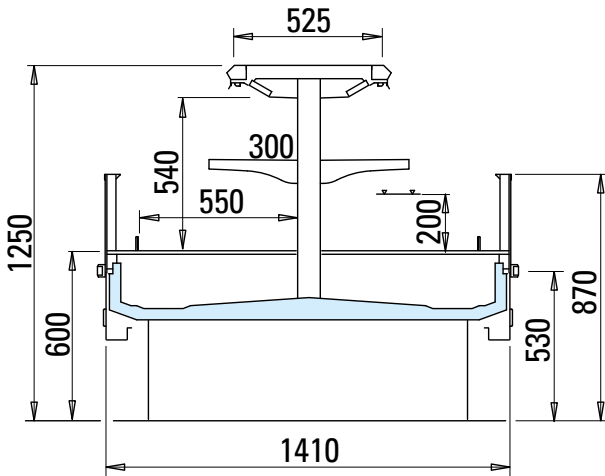


140 H125

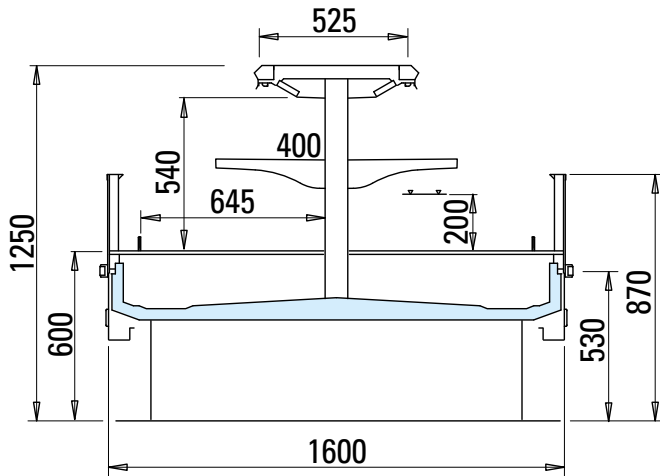

160 H125

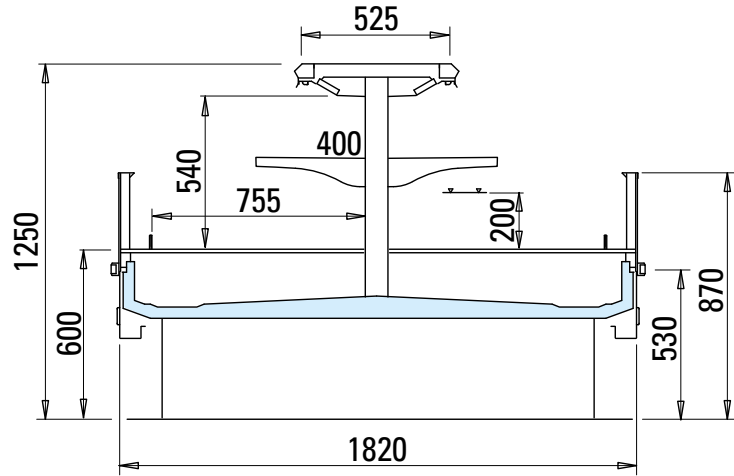


180 H125

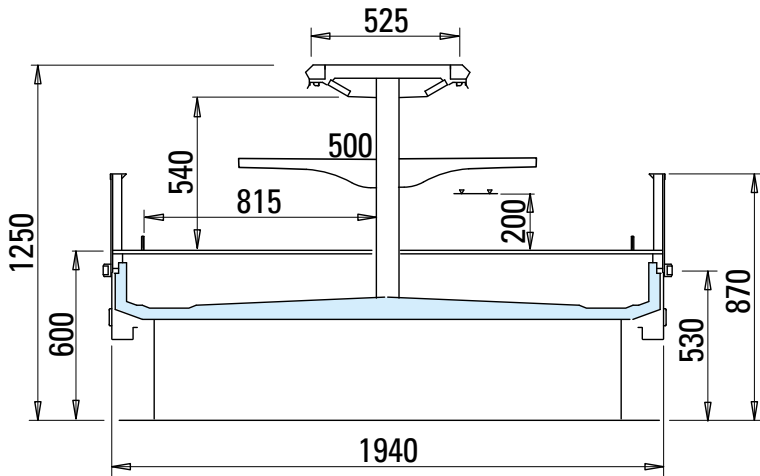


194 H125




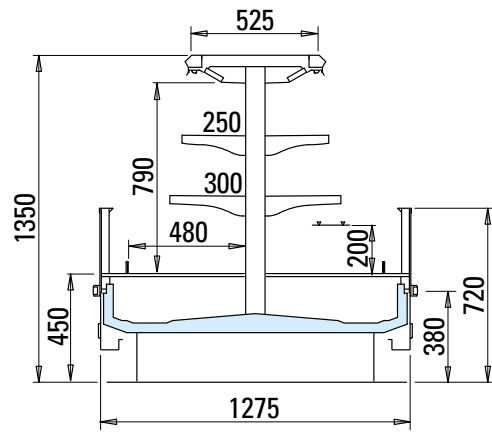


130 H135

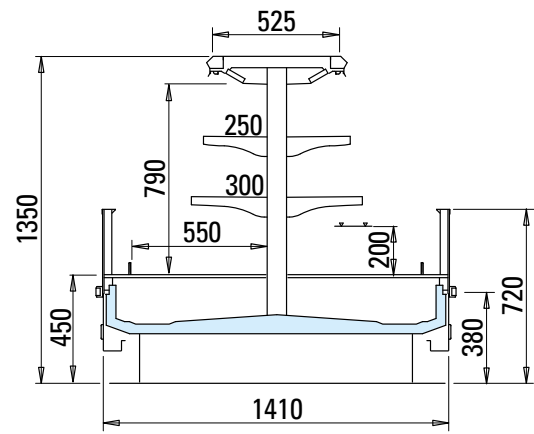


140 H135

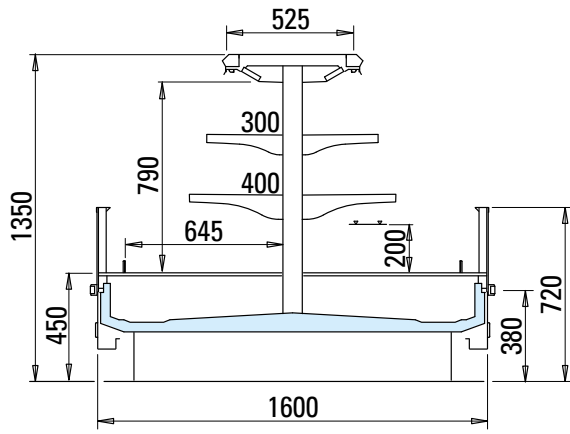


160 H135

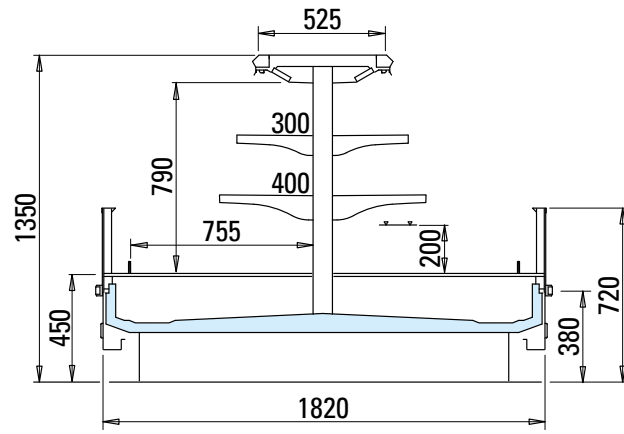


180 H135

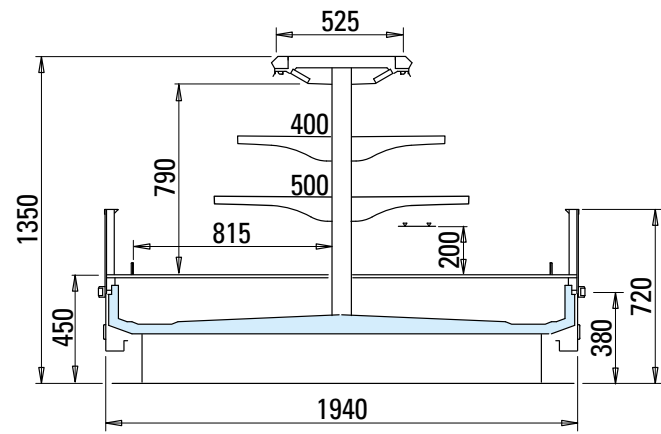


194 H135

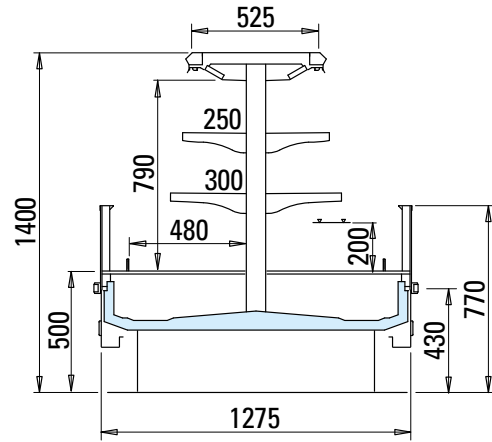


130 H140

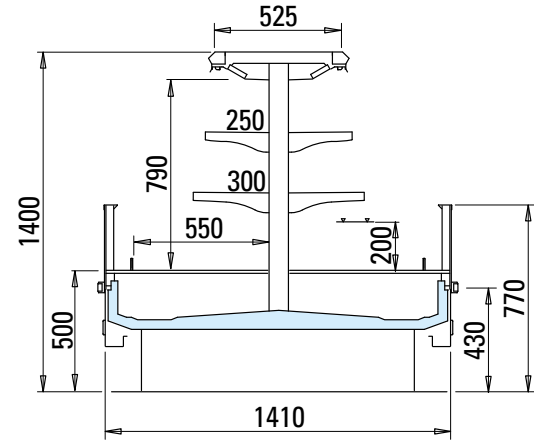


140 H140

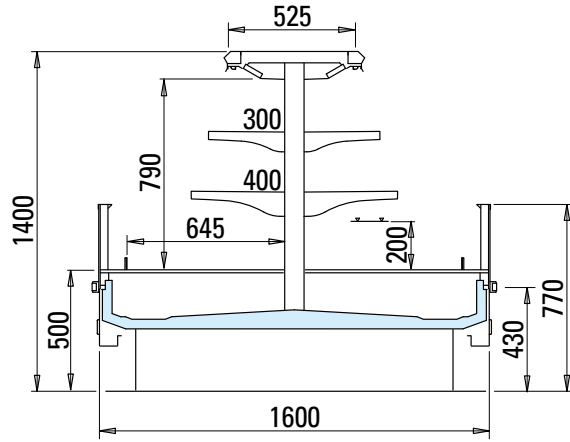


160 H140

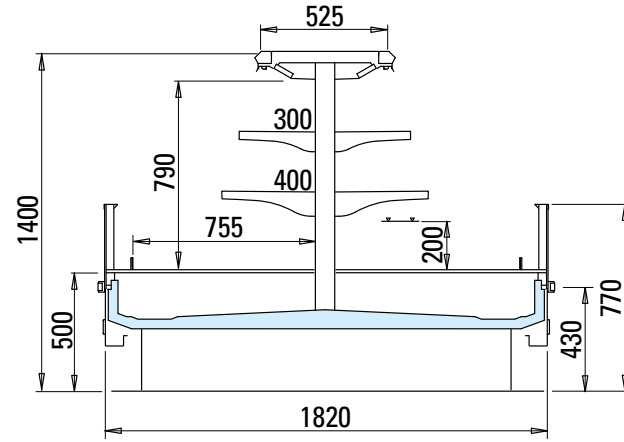


180 H140

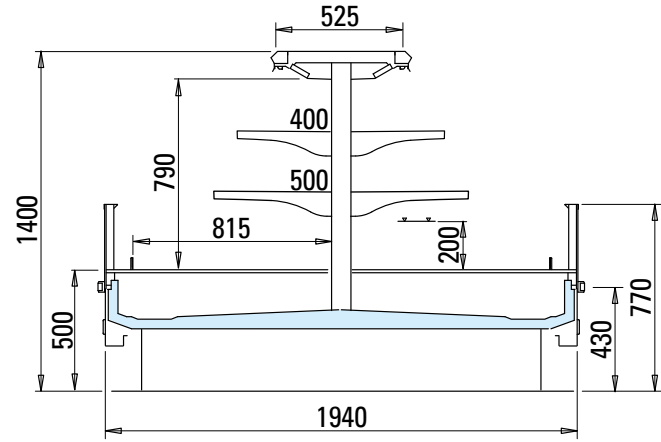


194 H140

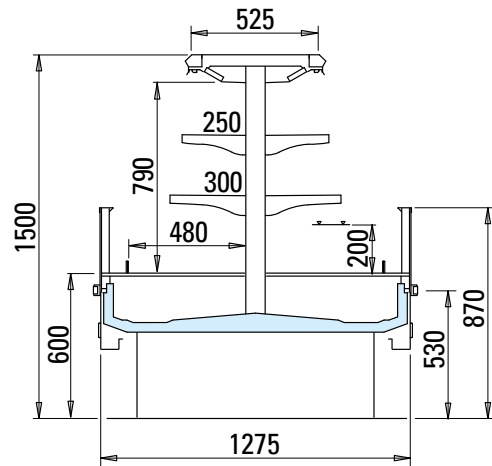


130 H150

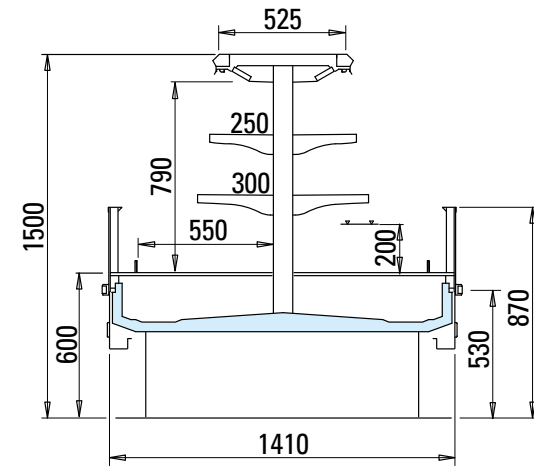


140 H150

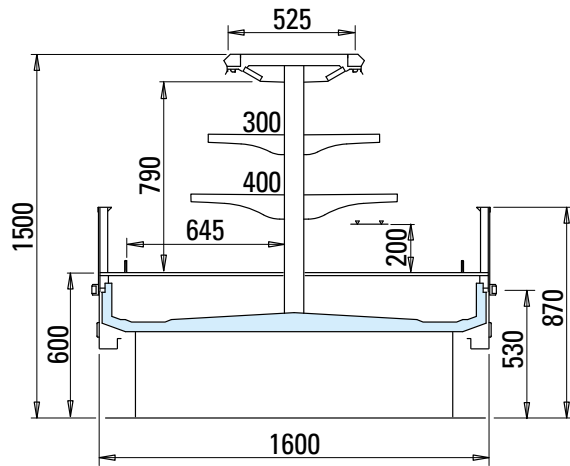

160 H150

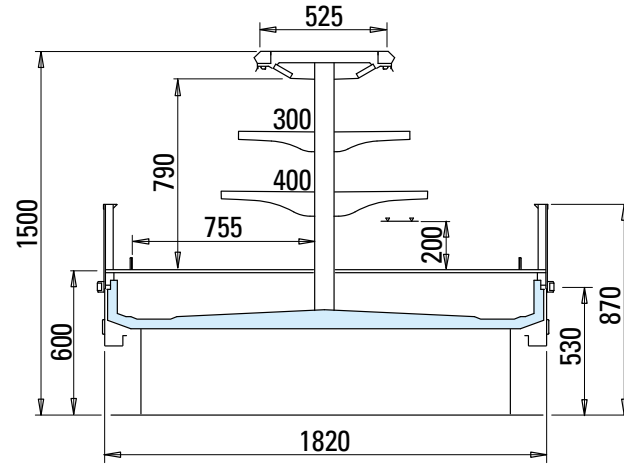

180 H150

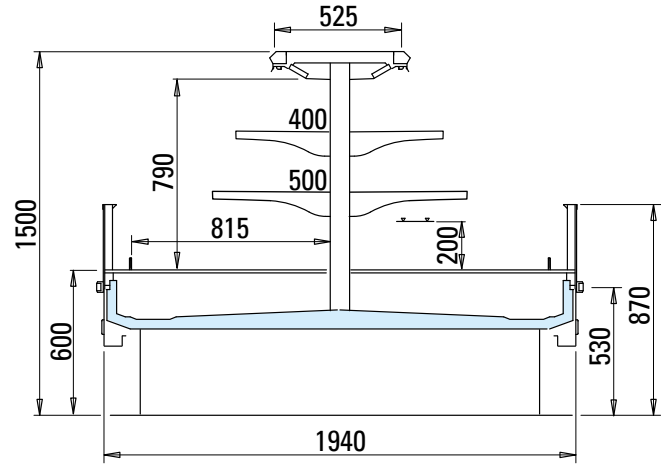



194 H150




VELDEN LX SVT-A-2 TN V TESTATA R

| Overall length (mm)           |       | 1284                                                        |      |     |     | 1419                                                        |      |     |     | 1610                                                        |      |     |     | 1832                                                        |      |     |     | 1952                                                        |     |     |     |
|-------------------------------|-------|-------------------------------------------------------------|------|-----|-----|-------------------------------------------------------------|------|-----|-----|-------------------------------------------------------------|------|-----|-----|-------------------------------------------------------------|------|-----|-----|-------------------------------------------------------------|-----|-----|-----|
| Height (cm)                   |       | 125                                                         | 135  | 140 | 150 | 125                                                         | 135  | 140 | 150 | 125                                                         | 135  | 140 | 150 | 125                                                         | 135  | 140 | 150 | 125                                                         | 135 | 140 | 150 |
| Temperature class             | 3M1   | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |     |     |     |
|                               | 3M2   | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |     |     |     |
| Preservation temperature (°C) | 0/+2  | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |     |     |     |
|                               | +2/+4 | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |      |     |     | •                                                           |     |     |     |
| Horizontal display area* (m²) |       | 1,24                                                        | 1,59 |     |     | 1,38                                                        | 1,77 |     |     | 1,58                                                        | 2,03 |     |     | 1,82                                                        | 2,33 |     |     | 1,95                                                        | 2,5 |     |     |
| Energy class**                |       | <div><div>A</div><div>T</div><div>G</div><div>F</div></div> |      |     |     | <div><div>A</div><div>T</div><div>G</div><div>F</div></div> |      |     |     | <div><div>A</div><div>T</div><div>G</div><div>F</div></div> |      |     |     | <div><div>A</div><div>T</div><div>G</div><div>F</div></div> |      |     |     | <div><div>A</div><div>T</div><div>G</div><div>F</div></div> |     |     |     |


\*Value referred to illustrated configurations. \*\*The energy class may vary depending on the product configuration.

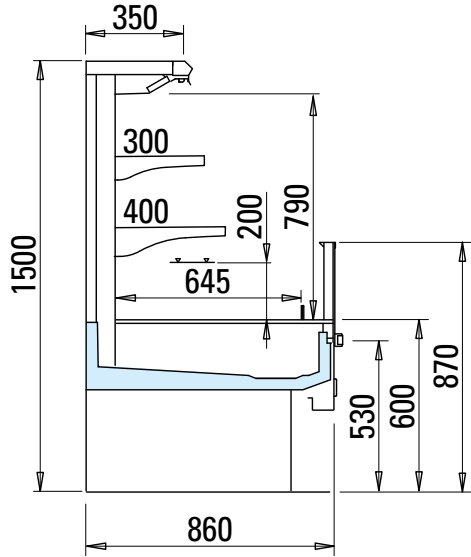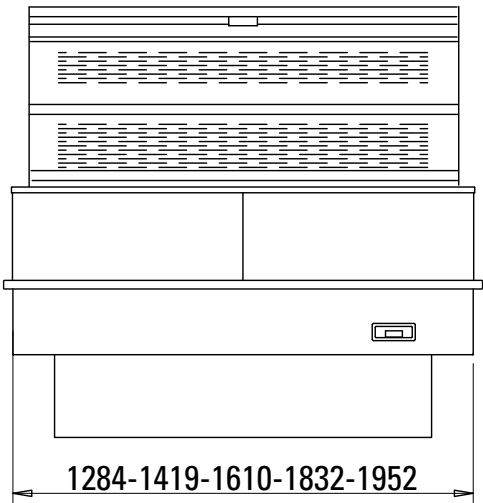


86 H150

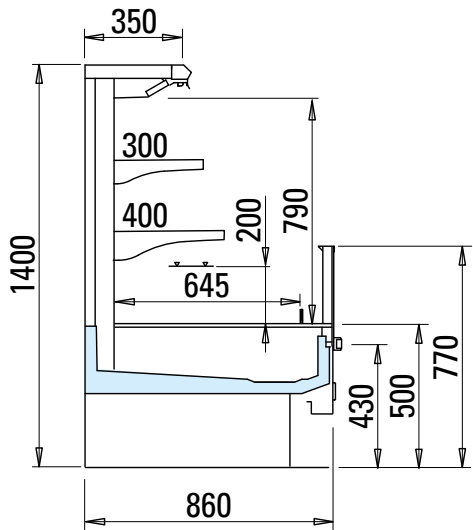

86 H140

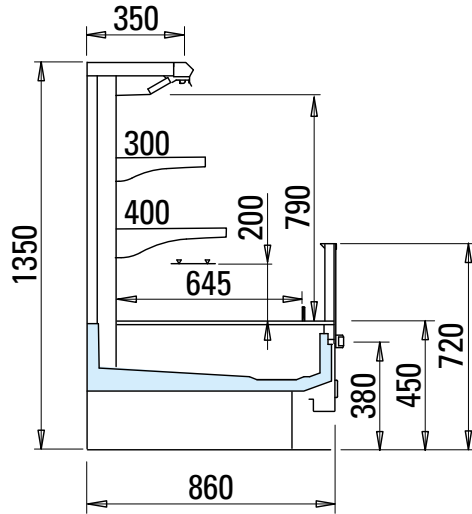

86 H135

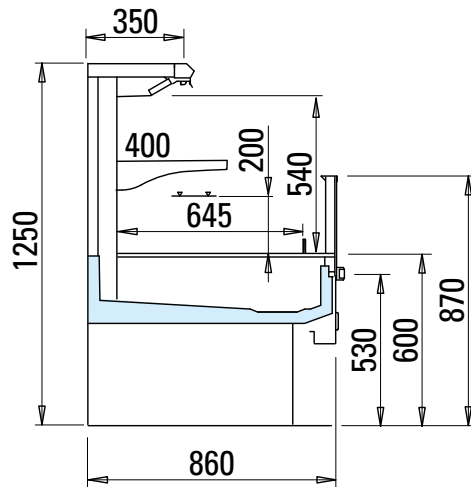

86 H125



ED. 01 - 08/11/2024



WWW.ARNEG.COM



Arneg follows a policy of continuous improvement and reserves the right to update this document at any time without prior notice.