

Modular Access Control (MAC) Portal Specification Sheet

MAC Safe-T-Check

General Features:

Enclosure	10' Container
Approx. Shipping Weight*	5,000 lbs
Approx. Footprint (L X W)	9'-10" X 8'-0"
Approx. Shipping (L X W X H)*	9'-10" X 8'-5" X 8'-6"
Approx. Overall (L X W X H)*	9'-10" X 10'-0" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	8'-6" X 7'-1"
Cooling Capacity / BTUH	20,000
Heating Capacity / BTUH	13,000
Heating Watts	1,923
Wall / Ceiling Insulation	R-10
Entry Door with Window	n/a

Turnstile Bay:


Lanes	1
Lane Style	Single
Roll-Up Doors	3' per Single

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	125
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	5.3
Demand Amps	22



Model No. M1ST

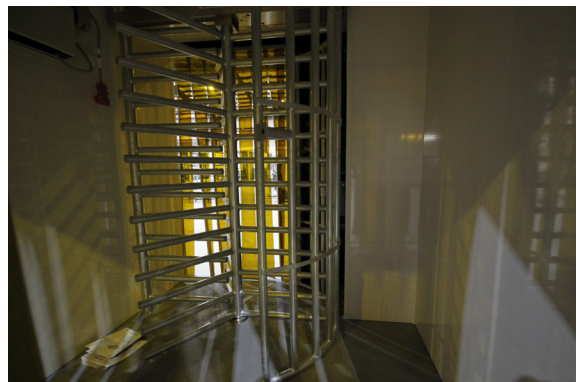

Patents:

US 10,626,629 B2

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.

