

Modular Access Control (MAC) Portal Specification Sheet

MAC-1

General Features:

Enclosure	Custom
Approx. Shipping Weight*	3,500 lbs
Approx. Footprint (L X W)	8'-0" X 6'-0"
Approx. Shipping (L X W X H)*	9'-6" X 6'-6" X 8'-6"
Approx. Overall (L X W X H)*	9'-6" X 6'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	No
Fork Lift	Yes
Other	Top Lifting Lugs

Office:

Approx. Dimensions (L X W)	n/a
Cooling Capacity / BTUH	n/a
Heating Capacity / BTUH	n/a
Heating Watts	n/a
Wall / Ceiling Insulation	n/a
Entry Door with Window	n/a

Turnstile Bay:

Lanes	1
Lane Style	Single
Roll-Up Doors	3' per Single

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	1.4
Demand Amps	6



Model No. M1XX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Modular Access Control (MAC) Portal Specification Sheet

MAC-2T

General Features:

Enclosure	10' Container
Approx. Shipping Weight*	4,600 lbs
Approx. Footprint (L X W)	10'-0" X 8'-0"
Approx. Shipping (L X W X H)*	10'-3" X 8'-2" X 8'-6"
Approx. Overall (L X W X H)*	10'-3" X 9'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	n/a
Cooling Capacity / BTUH	n/a
Heating Capacity / BTUH	n/a
Heating Watts	n/a
Wall / Ceiling Insulation	n/a
Entry Door with Window	n/a

Turnstile Bay:

Lanes	2
Lane Style	Tandem
Roll-Up Doors	6' per Tandem

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	125
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	1.8
Demand Amps	7

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Model No. M2TX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737



Modular Access Control (MAC) Portal Specification Sheet

MAC-2M

General Features:

Enclosure	20' Container
Approx. Shipping Weight*	7,200 lbs
Approx. Footprint (L X W)	20'-0" X 8'-0"
Approx. Shipping (L X W X H)*	20'-0" X 8'-5" X 8'-6"
Approx. Overall (L X W X H)*	20'-0" X 9'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	7'-6" X 7'-0"
Cooling Capacity / BTUH	9,000
Heating Capacity / BTUH	11,000
Heating Watts	3,500
Wall / Ceiling Insulation	R-15
Entry Door with Window	1

Turnstile Bay:

Lanes	2
Lane Style	Single
Roll-Up Doors	3' per Single

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	6.9
Demand Amps	29

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Model No. M2MX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737



Modular Access Control (MAC) Portal Specification Sheet

MAC-3

General Features:

Enclosure	20' Container
Approx. Shipping Weight*	6,700 lbs
Approx. Footprint (L X W)	20'-0" X 8'-0"
Approx. Shipping (L X W X H)*	20'-4" X 8'-2" X 8'-6"
Approx. Overall (L X W X H)*	20'-4" X 9'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	n/a
Cooling Capacity / BTUH	n/a
Heating Capacity / BTUH	n/a
Heating Watts	n/a
Wall / Ceiling Insulation	n/a
Entry Door with Window	n/a

Turnstile Bay:

Lanes	3
Lane Style	Single
Roll-Up Doors	3' per Single

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	125
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	2.3
Demand Amps	9



Model No. M3XX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Modular Access Control (MAC) Portal Specification Sheet

MAC-3E

General Features:

Enclosure	26' Container
Approx. Shipping Weight*	8,600 lbs
Approx. Footprint (L X W)	26'-0" X 8'-0"
Approx. Shipping (L X W X H)*	26'-6" X 8'-6" X 8'-6"
Approx. Overall (L X W X H)*	26'-6" X 9'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	No
Other	No

Office:

Approx. Dimensions (L X W)	9'-1" X 7'-0"
Cooling Capacity / BTUH	9,000
Heating Capacity / BTUH	11,000
Heating Watts	3,500
Wall / Ceiling Insulation	R-15
Entry Door with Window	2

Turnstile Bay:

Lanes	3
Lane Style	Single
Roll-Up Doors	3' per Single

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	5.8
Demand Amps	24



Model No. M3EX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Modular Access Control (MAC) Portal Specification Sheet

MAC-4T

General Features:

Enclosure	20' Container
Approx. Shipping Weight*	7,200 lbs
Approx. Footprint (L X W)	20'-0" X 8'-0"
Approx. Shipping (L X W X H)*	20'-4" X 8'-2" X 8'-6"
Approx. Overall (L X W X H)*	20'-4" X 9'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	n/a
Cooling Capacity / BTUH	n/a
Heating Capacity / BTUH	n/a
Heating Watts	n/a
Wall / Ceiling Insulation	n/a
Entry Door with Window	n/a

Turnstile Bay:

Lanes	4
Lane Style	Tandem
Roll-Up Doors	6' per Tandem

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	125
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	2.6
Demand Amps	11



Model No. M4TX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Modular Access Control (MAC) Portal Specification Sheet

MAC-4M

General Features:

Enclosure	40' Container
Approx. Shipping Weight*	15,500 lbs
Approx. Footprint (L X W)	40'-0" X 8'-0"
Approx. Shipping (L X W X H)*	40'-0" X 8'-6" X 8'-6"
Approx. Overall (L X W X H)*	40'-0" X 9'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	No
Other	No

Office:

Approx. Dimensions (L X W)	17'-2" X 7'-0"
Cooling Capacity / BTUH	12,000
Heating Capacity / BTUH	11,000
Heating Watts	3,500
Wall / Ceiling Insulation	R-15
Entry Door with Window	2

Turnstile Bay:

Lanes	4
Lane Style	Single
Roll-Up Doors	3' per Single

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	8.2
Demand Amps	34

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Model No. M4MX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737



Modular Access Control (MAC) Portal Specification Sheet

MAC-6T

General Features:

Enclosure	25' Container
Approx. Shipping Weight*	9,300 lbs
Approx. Footprint (L X W)	25'-0" X 8'-0"
Approx. Shipping (L X W X H)*	25'-5" X 8'-2" X 8'-6"
Approx. Overall (L X W X H)*	25'-5" X 9'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	No
Other	No

Office:

Approx. Dimensions (L X W)	n/a
Cooling Capacity / BTUH	n/a
Heating Capacity / BTUH	n/a
Heating Watts	n/a
Wall / Ceiling Insulation	n/a
Entry Door with Window	n/a

Turnstile Bay:

Lanes	6
Lane Style	Tandem
Roll-Up Doors	6' per Tandem

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	3.9
Demand Amps	16



Model No. M6TX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Modular Access Control (MAC) Portal Specification Sheet

MAC-6M

General Features:

Enclosure	40' Container
Approx. Shipping Weight*	15,200 lbs
Approx. Footprint (L X W)	40'-0" X 8'-0"
Approx. Shipping (L X W X H)*	40'-0" X 8'-6" X 8'-6"
Approx. Overall (L X W X H)*	40'-0" X 9'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	No
Other	No

Office:

Approx. Dimensions (L X W)	6'-9" X 7'-0"
Cooling Capacity / BTUH	9,000
Heating Capacity / BTUH	11,000
Heating Watts	3,500
Wall / Ceiling Insulation	R-15
Entry Door with Window	1

Turnstile Bay:

Lanes	6
Lane Style	Single
Roll-Up Doors	3' per Single

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	9.2
Demand Amps	38

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Model No. M6MX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737



Modular Access Control (MAC) Portal Specification Sheet

MAC-8E

General Features:

Enclosure	40' Container
Approx. Shipping Weight*	13,700 lbs
Approx. Footprint (L X W)	40'-0" X 8'-0"
Approx. Shipping (L X W X H)*	40'-8" X 8'-4" X 8'-6"
Approx. Overall (L X W X H)*	40'-8" X 9'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	No
Other	No

Office:

Approx. Dimensions (L X W)	6'-9" X 7'-0"
Cooling Capacity / BTUH	9,000
Heating Capacity / BTUH	11,000
Heating Watts	3,500
Wall / Ceiling Insulation	R-15
Entry Door with Window	1

Turnstile Bay:

Lanes	8
Lane Style	Tandem
Roll-Up Doors	6' per Tandem

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	10.1
Demand Amps	42

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Model No. M8EX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737



Modular Access Control (MAC) Portal Specification Sheet

MAC-10T

General Features:

Enclosure	40' Container
Approx. Shipping Weight*	14,500 lbs
Approx. Footprint (L X W)	40'-0" X 8'-0"
Approx. Shipping (L X W X H)*	40'-4" X 8'-2" X 8'-6"
Approx. Overall (L X W X H)*	40'-4" X 9'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	No
Other	No

Office:

Approx. Dimensions (L X W)	n/a
Cooling Capacity / BTUH	n/a
Heating Capacity / BTUH	n/a
Heating Watts	n/a
Wall / Ceiling Insulation	n/a
Entry Door with Window	n/a

Turnstile Bay:

Lanes	10
Lane Style	Tandem
Roll-Up Doors	6' per Tandem

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	5.2
Demand Amps	22



Model No. M10T

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Modular Access Control (MAC) Portal Specification Sheet

MAC-1L

General Features:

Enclosure	Custom
Approx. Shipping Weight*	1,600 lbs
Approx. Footprint (L X W)	6'-3" X 6'-0"
Approx. Shipping (L X W X H)*	6'-3" X 6'-7" X 8'-5"
Approx. Overall (L X W X H)*	6'-3" X 6'-7" X 8'-5"

Lifting Methods:

Bottom Corner Blocks	No
Top Corner Blocks	No
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	n/a
Cooling Capacity / BTUH	n/a
Heating Capacity / BTUH	n/a
Heating Watts	n/a
Wall / Ceiling Insulation	n/a
Entry Door with Window	n/a

Turnstile Bay:

Lanes	1
Lane Style	Single
Roll-Up Doors	n/a

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	125
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	0.8
Demand Amps	3

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Model No. M1LX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737



Modular Access Control (MAC) Portal Specification Sheet

MAC-2L

General Features:

Enclosure	Custom
Approx. Shipping Weight*	2,400 lbs
Approx. Footprint (L X W)	8'-11" X 6'-0"
Approx. Shipping (L X W X H)*	9'-3" X 6'-0" X 8'-5"
Approx. Overall (L X W X H)*	9'-3" X 6'-0" X 8'-5"

Lifting Methods:

Bottom Corner Blocks	No
Top Corner Blocks	No
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	n/a
Cooling Capacity / BTUH	n/a
Heating Capacity / BTUH	n/a
Heating Watts	n/a
Wall / Ceiling Insulation	n/a
Entry Door with Window	n/a

Turnstile Bay:

Lanes	2
Lane Style	Tandem
Roll-Up Doors	n/a

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	125
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	0.9
Demand Amps	4



Model No. M2LX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Modular Access Control (MAC) Portal Specification Sheet

MAC Safe-T-Check

General Features:

Enclosure	10' Container
Approx. Shipping Weight*	5,000 lbs
Approx. Footprint (L X W)	9'-10" X 8'-0"
Approx. Shipping (L X W X H)*	9'-10" X 8'-5" X 8'-6"
Approx. Overall (L X W X H)*	9'-10" X 10'-0" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	8'-6" X 7'-1"
Cooling Capacity / BTUH	20,000
Heating Capacity / BTUH	13,000
Heating Watts	1,923
Wall / Ceiling Insulation	R-10
Entry Door with Window	n/a

Turnstile Bay:


Lanes	1
Lane Style	Single
Roll-Up Doors	3' per Single

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	125
Voltage**	120 / 240
Frequency	60 Hz
Demand KVA***	5.3
Demand Amps	22



Model No. M1ST

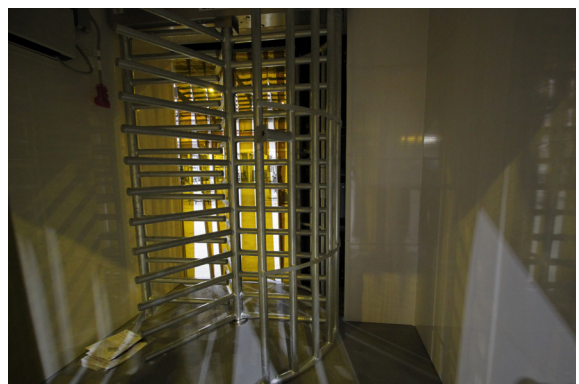

Patents:

US 10,626,629 B2

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Vehicle Access Control (VAC) Portal Specification Sheet

VAC-2B

General Features:

Enclosure	n/a
Approx. Shipping Weight*	2,400 lbs
Approx. Shipping (L X W X H)*	18'-6" X 4'-0" X 7'-3"

Lifting Methods:

Bottom Corner Blocks	No
Top Corner Blocks	No
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	n/a
Cooling Capacity / BTUH	n/a
Heating Capacity / BTUH	n/a
Heating Watts	n/a
Wall / Ceiling Insulation	n/a
Entry Door with Window	n/a

Vehicle Access Control:

Lanes	2
Gate Barrier Chassis	1 per lane
Gate Barrier Arm**	14'
Gate Barrier Voltage	120 VAC
Dual Card Reader	1 per lane
Dual Card Reader Heights	3'-6" and 7'-0"

Electrical Data:

Lighting Technology	n/a
Load Center Main Amps	100
Voltage**/*****	120/240
Frequency	60 Hz
Demand KVA****	0.9
Demand Amps	4



Model No. V2BX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard arm length, other lengths available but may require custom design.

*** Standard voltage, other voltages are available.

**** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.

***** Solar gate barriers include 120 VAC modules for alternate power sources. Battery charger included for 120/240/208 VAC charging of batteries.



Vehicle Access Control (VAC) Portal Specification Sheet

VAC-2S

General Features:

Enclosure	No
Approx. Shipping Weight*	2,400 lbs
Approx. Shipping (L X W X H)*	13'-0" X 5'-0" X 7'-3"

Lifting Methods:

Bottom Corner Blocks	No
Top Corner Blocks	No
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	n/a
Cooling Capacity / BTUH	n/a
Heating Capacity / BTUH	n/a
Heating Watts	n/a
Wall / Ceiling Insulation	n/a
Entry Door with Window	n/a

Vehicle Access Control:

Lanes	2
Gate Barrier Chassis	1 per lane
Gate Barrier Arm**	14'
Gate Barrier Voltage	24 VDC
Dual Card Reader	1 per lane
Dual Card Reader Heights	3'-6" and 7'-0"

Electrical Data:

Lighting Technology	n/a
Load Center Main Amps	n/a
Voltage**/*****	24 VDC
Frequency	n/a
Demand KVA****	n/a
Demand Amps	n/a



Model No. V2SX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard arm length, other lengths available but may require custom design.

*** Standard voltage, other voltages are available.

**** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.

***** Solar gate barriers include 120 VAC modules for alternate power sources. Battery charger included for 120/240/208 VAC charging of batteries.



Vehicle Access Control (VAC) Portal Specification Sheet

VAC-2B46

General Features:

Guard Office	Yes
Approx. Shipping Weight*	5,200 lbs
Approx. Shipping (L X W X H)*	18'-6" X 4'-0" X 9'-3"

Lifting Methods:

Bottom Corner Blocks	No
Top Corner Blocks	No
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	5'-1" X 3'-1"
Cooling Capacity / BTUH	9,000
Heating Capacity / BTUH	11,000
Heating Watts	3,500
Wall / Ceiling Insulation	R-15
Entry Door with Window	1

Vehicle Access Control:

Lanes	2
Gate Barrier Chassis	1 per lane
Gate Barrier Arm**	14'
Gate Barrier Voltage	120 VAC
Dual Card Reader	1 per lane
Dual Card Reader Heights	3'-6" and 7'-0"

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**/*****	120/240
Frequency	60 Hz
Demand KVA****	4.7
Demand Amps	19



Model No. V2MX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard arm length, other lengths available but may require custom design.

*** Standard voltage, other voltages are available.

**** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.

***** Solar gate barriers include 120 VAC modules for alternate power sources. Battery charger included for 120/240/208 VAC charging of batteries.



Vehicle Access Control (VAC) Portal Specification Sheet

VAC-281

General Features:

Guard Office	Yes
Approx. Shipping Weight*	11,000 lbs
Approx. Shipping (L X W X H)*	29'-4" X 8'-1" X 9'-2"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	8'-5" X 7'-2"
Cooling Capacity / BTUH	9,000
Heating Capacity / BTUH	11,000
Heating Watts	3,500
Wall / Ceiling Insulation	R-15
Entry Door with Window	1

Vehicle Access Control:

Lanes	2
Gate Barrier Chassis	1 per lane
Gate Barrier Arm**	14'
Gate Barrier Voltage	120 VAC
Dual Card Reader	1 per lane
Dual Card Reader Heights	3'-6" and 7'-0"

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**/*****	120/240
Frequency	60 Hz
Demand KVA****	5.1
Demand Amps	21



Model No. V2XX

Patents:

US 7,762,025; CA 2,587,968;
EP 1812666; DZ 5173;
EG 25627; US 8,015,754;
US 8,671,624; US 9,051,748;
US 9,404,278; US 7,823,338;
CA 2,682,764; EP 2137356;
NG RPNG/C/2007/737

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard arm length, other lengths available but may require custom design.

*** Standard voltage, other voltages are available.

**** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.

***** Solar gate barriers include 120 VAC modules for alternate power sources. Battery charger included for 120/240/208 VAC charging of batteries.



Modular Guard Booth Specification Sheet

GH-46

General Features:

Enclosure	Custom
Approx. Shipping Weight*	2,500 lbs
Approx. Shipping (L X W X H)*	7'-6" X 4'-4" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	No
Top Corner Blocks	No
Fork Lift	Yes
Other	Top Lifting Plates

Office:

Approx. Dimensions (L X W)	5'-2" X 3'-2"
Cooling Capacity / BTUH	9,000
Heating Capacity / BTUH	11,000
Heating Watts	3,500
Wall / Ceiling Insulation	R-15
Entry Door with Window	1

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120/240
Frequency	60 Hz
Demand KVA***	4.4
Demand Amps	17



Model No. G46X



* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Modular Guardhouse Specification Sheet

GH-68

General Features:

Enclosure	Custom
Approx. Shipping Weight*	3,500 lbs
Approx. Shipping (L X W X H)*	9'-1" X 6'-5" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	No
Fork Lift	Yes
Other	Top Lifting Lugs

Office:

Approx. Dimensions (L X W)	7'-2" X 5'-2"
Cooling Capacity / BTUH	9,000
Heating Capacity / BTUH	11,000
Heating Watts	3,500
Wall / Ceiling Insulation	R-15
Entry Door with Window	1

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120/240
Frequency	60 Hz
Demand KVA***	4.4
Demand Amps	18



Model No. G68X

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Modular Guard Booth Specification Sheet

GH-81

General Features:

Enclosure	10' Container
Approx. Shipping Weight*	4,600 lbs
Approx. Shipping (L X W X H)*	11'-3" X 8'-0" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	8'-6" X 7'-1"
Cooling Capacity / BTUH	9,000
Heating Capacity / BTUH	11,000
Heating Watts	3,500
Wall / Ceiling Insulation	R-15
Entry Door with Window	1

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120/240
Frequency	60 Hz
Demand KVA***	5.1
Demand Amps	21



Model No. G81X

* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.



Modular Guard Booth Specification Sheet

GH-82

General Features:

Enclosure	20' Container
Approx. Shipping Weight*	7,900 lbs
Approx. Shipping (L X W X H)*	20'-3" X 8'-6" X 8'-6"

Lifting Methods:

Bottom Corner Blocks	Yes
Top Corner Blocks	Yes
Fork Lift	Yes
Other	No

Office:

Approx. Dimensions (L X W)	18'-6" X 7'-0"
Cooling Capacity / BTUH	12,000
Heating Capacity / BTUH	11,000
Heating Watts	3,500
Wall / Ceiling Insulation	R-15
Entry Door with Window	2

Electrical Data:

Lighting Technology	LED
Load Center Main Amps	100
Voltage**	120/240
Frequency	60 Hz
Demand KVA***	6.3
Demand Amps	26



Model No. G82X



* General feature weights and dimensions are calculated and can vary based on container and options.

** Standard voltage, other voltages are available.

*** Demand KVA is based on National Electric Code (NEC) load calculation methods, actual may vary depending on customer equipment.

