




SKIDPAC60

HIGH EFFICIENCY PACKAGED AIR CONDITIONER UP TO 14 S.E.E.R. - R-410A


- Compact footprint and profile makes the SKIDPAC60 easy to install and transport.
- Raised base pan allows water to drain away from the unit.
- Drain trap design optimizes drainage capabilities.
- Optional electric heat 20KW.
- ECM Blower Motor: Fixed torque energy efficient brushless DC ECM motor, provides 5 speeds.
- Permanently lubricated condenser motor: A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- Thermostat included.
- Unit can be placed with a crane.

The compact and reliable SKIDPAC60 is perfect for temporary planned and emergency HVAC in commercial and industrial spaces. Connect power and duct and you are back in business!

| | | |
|---------------------------------|--|-------------------|
| Performance Data | Cooling BTU/h | 56,000 |
| | SEER | 14 |
| | EER | 11 |
| | Sound Ratings (db.) | 78 |
| | CFM | 1840 |
| Electrical Data Cooling | Volts-Cycles-Phase (1) | 208/230-60-1 |
| | Operating Voltage Range | 187-253 |
| | Min Circuit Ampacity (A) | 38.9 |
| | Amps | 32.8 |
| | Delay Fuse - Max. (2) | 60 |
| Electrical Data Heating | Heater kw | 20 |
| | Single Circuit MCA | 108.8 |
| | Single Circuit MOP | 110 |
| | Multiple Supply Circuit A (Compressor, Blower & Fan) MCA | 58.8 |
| | Multiple Supply Circuit A (Compressor, Blower & Fan) MOP | 60 |
| | Multiple Supply Circuit B (Heater) MCA | 50 |
| Compressor Data | RLA | 24.3 |
| | LRA | 144.2 |
| R410A Refrigerant Charge | Oz. | 73 |
| Measurements | Weight (Lbs) | 325 |
| | Dimensions (h x w x d) (in.) | 34.2" x 39" x 49" |
| | Return Diameter (in.) | 16" |
| | Supply Diameter (in.) | 12" |

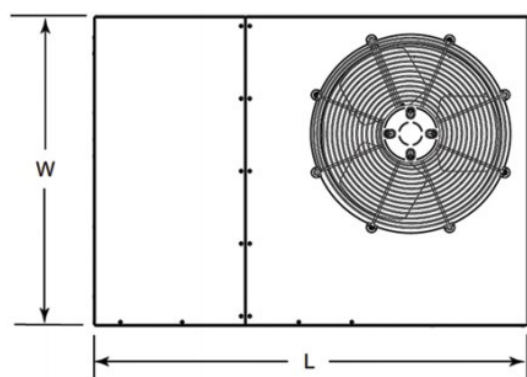

TOP VIEW

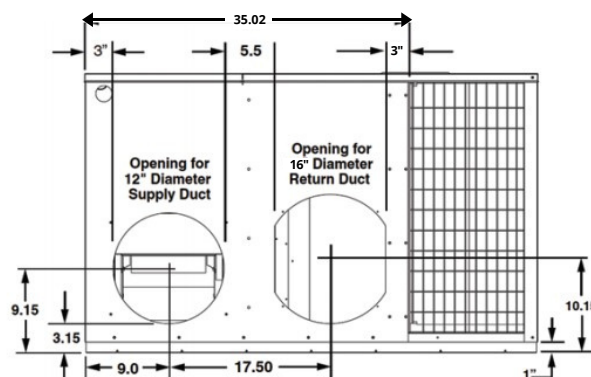

REAR VIEW