

Catalog

Cooking systems and
accessories



Warranty explanations and notes: This catalog is only valid in USA. The listed prices are non-binding price recommendations by RATIONAL USA Inc., before any applicable sales tax; they are valid effective 03-12-2020. All previous catalogs are thereby invalidated. We reserve the right to make technical changes in the interest of progress as well as to modify prices and item numbers.

The two year warranty on new RATIONAL units is effective beginning on the invoice date, or on the documented date of installation. Evidence of the installation date must be provided in the form of the installation invoice or through written confirmation on the part of a dealer or distribution partner. The terms and conditions of the RATIONAL warranty declaration apply. We would be glad to supply detailed information about our range of special models and other individual equipment options.

For more information, visit rational-online.com, call us at 888-320-7274, or email us at info@rational-online.us

24h Guaranteed in stock item. Available to ship within 24 hours (see terms + conditions). Only available for standard configurations.

so Special order items.

● Standard equipment at no additional charge | ○ Special equipment installed for an additional fee | – Not available | □ Accessory

Table of contents

4	iCombi Pro
6	iCombi Classic
8	Options and Combi-Duo
8	Options - iCombi Pro and iCombi Classic
12	Combi-Duo XS
13	Combi-Duo 6-half size and 10-half size
15	Combi-Duo 6-full size and 10-full size
17	iCombi care products
18	Accessories
18	Accessories Size XS
20	Accessories - Sizes 6-half size and 10-half size
24	Accessories - Sizes 6-full size and 10-full size
28	Accessories Size 20-half size and 20-full size
31	Cooking and special accessories
35	Gastronorm containers
36	iCombi compatibility package
37	Combi-Duo universal compatibility packages
39	Installation Kits
40	Voltage Options
41	Certification marks for iCombi
42	iCombi features
42	Functions
43	Operation
44	Care and operational safety
45	Features
47	Setup and test certificates
48	Work safety and ergonomic features
49	iVario
49	iVario overview
50	iVario
52	Options and setup variations
52	iVario options
53	Setup variations - iVario 2-XS and iVario Pro 2-S
54	Setup variations - iVario Pro L and iVario Pro XL
55	Accessories
55	Accessories Size 2-XS
57	Accessories Size 2-S
59	Accessories Size L and XL
61	iVario care products
62	Voltage Options, Installation Kits iVario
63	Features and certifications
63	iVario features
65	iVario certifications
66	ConnectedCooking
67	RATIONAL USA



	XS	6-half size	10-half size
Electric	\$11,920	\$14,030	\$19,720
Nº: 3 AC 208/240 V	24h CA1ERRA.0000210	24h CB1ERRA.0000212	24h CD1ERRA.0000215
Nº: 3 AC 480 V	–	CB1ERRA.0000213	CD1ERRA.0000216
Nº: 2 AC 208/240 V	24h CA1ERRA.0000211	24h CB1ERRA.0000214	–
Connected load	5.7 kW	10.8 kW	18.9 kW
Voltage	3 AC 208/240 V	3 AC 208/240 V / 3AC 480 V	3 AC 208/240 V / 3AC 480 V
Weight	147 lb (67 kg)	218 lb (99 kg)	279 lb (127 kg)
Gas	–	\$16,730	\$22,870
Nº: Natural gas – 1 NAC 120 V	–	24h CB1GRRA.0000230	24h CD1GRRA.0000234
Nº: Natural gas – 2 NAC 208/240 V	–	CB1GRRA.0000231	CD1GRRA.0000235
Nº: Liquid gas – 1 NAC 120 V	–	CB1GRRA.0000232	CD1GRRA.0000236
Nº: Liquid gas – 2 NAC 208/240 V	–	so CB1GRRA.0000233	so CD1GRRA.0000237
Connection rating - Natural gas	–	49500 BTU (13 kW)	83500 BTU (22 kW)
Connection rating - Liquid gas	–	48500 BTU (13 kW)	82000 BTU (22 kW)
Weight	–	257 lb (117 kg)	341 lb (155 kg)
Capacity	3 x 2/3 GN; 12" x 14" x 2 1/2" 4 - 13" x 18" 1/2 sheet pans; 3 - 12 3/4" x 14" x 2 1/2" steam pans	6-13" x 18" 1/2 sheet pans; 6-12 3/4" x 20 7/8" steam pans; 6 x 1/1 GN; 12 x 1/2 GN	10-13" x 18" 1/2 sheet pans; 10-12 3/4" x 20 7/8" steam pans; 10 x 1/1 GN; 20 x 1/2 GN
Meals per day	20-80	30-100	80-150
Width	25 3/4 in (655 mm)	33 1/2 in (850 mm)	33 1/2 in (850 mm)
Depth (including door handle)	24 1/2 in (621 mm)	33 1/8 in (842 mm)	33 1/8 in (842 mm)
Height (including ventilation pipe)	23 1/2 in (594 mm)	31 5/8 in (804 mm)	41 7/8 in (1064 mm)

Options			
Left-side hinge for cooking cabinet door	\$553	\$553	\$553
Mobile rack package	–	\$463	\$565
Integrated fat drain	–	\$1,106	\$1,106
MarineLine	\$765	\$784	\$784
HeavyDutyLine	–	\$815	\$815
SecurityLine	–	\$1,655	\$1,655
Safety door lock	\$97	\$97	\$97
UltraVent installed	\$3,895	–	–
UltraVent Plus installed	\$5,216	–	–

Corresponding accessories can be found here:	Page [▶ 18]	Page [▶ 20]	Page [▶ 20]
--	-------------	-------------	-------------

More information and options can be found on Page [▶ 8] and on our website. Additional information on combinations of options and special voltages will also be provided on request.

iCombi Pro



6-full size	10-full size	20-half size	20-full size
\$21,430	\$26,690	\$33,360	\$47,820
24h CC1ERRA.0000218	24h CE1ERRA.0000221	CF1ERRA.0000224	CG1ERRA.0000227
24h CC1ERRA.0000219	24h CE1ERRA.0000222	so CF1ERRA.0000225	CG1ERRA.0000228
–	–	–	–
22.4 kW	37.4 kW	37.2 kW	67.9 kW
3 AC 208/240 V / 3AC 480 V	3 AC 208/240 V / 3AC 480 V	3 AC 208/240 V / 3AC 480 V	3 AC 208/240 V / 3AC 480 V
302 lb (137 kg)	394 lb (179 kg)	579 lb (263 kg)	740 lb (336 kg)
\$24,860	\$32,410	\$37,690	\$54,030
–	–	CF1GRRRA.0000242	–
24h CC1GRRRA.0000238	24h CE1GRRRA.0000240	so CF1GRRRA.0000243	24h CG1GRRRA.0000245
–	–	so CF1GRRRA.0000244	–
24h CC1GRRRA.0000239	CE1GRRRA.0000241	–	CG1GRRRA.0000246
106500 BTU (28 kW)	152000 BTU (40 kW)	159500 BTU (42 kW)	303500 BTU (80 kW)
104000 BTU (28 kW)	148500 BTU (40 kW)	156000 BTU (42 kW)	296500 BTU (80 kW)
317 lb (144 kg)	423 lb (192 kg)	626 lb (284 kg)	835 lb (379 kg)
6-18" x 26" full sheet pans; 12-12 3/4" x 20 7/8" steam pans; 6 x 2/1 GN / 12 x 1/1 GN	10-18" x 26" full sheet pans; 20-12 3/4" x 20 7/8" steam pans; 10 x 2/1 GN / 20 x 1/1 GN	20-13" x 18" 1/2 sheet pans; 20-12 3/4" x 20 7/8" steam pans; 20 x 1/1 GN; 40 x 1/2 GN	20-18" x 26" full sheet pans; 40-12 3/4" x 20 7/8" steam pans; 20 x 2/1 GN / 40 x 1/1 GN
60-160	150-300	150-300	300-500
42 1/4 in (1072 mm)	42 1/4 in (1072 mm)	34 1/2 in (877 mm)	42 5/8 in (1082 mm)
41 in (1042 mm)	41 in (1042 mm)	35 7/8 in (913 mm)	44 in (1117 mm)
31 5/8 in (804 mm)	41 7/8 in (1064 mm)	73 3/4 in (1872 mm)	73 3/4 in (1872 mm)

Option			
\$553	\$553	–	–
\$648	\$781	–	–
\$1,106	\$1,106	\$4,677	\$4,677
\$784	\$784	\$1,541	\$1,541
\$815	\$815	\$1,690	\$1,755
\$1,655	\$1,655	\$3,764	\$3,764
\$97	\$97	\$244	\$244
–	–	–	–
–	–	–	–

Page [▶ 24]	Page [▶ 24]	Page [▶ 28]	Page [▶ 28]
-------------	-------------	-------------	-------------

ENERGY STAR excludes the following cooking systems from certification: iCombi Pro XS and iCombi Pro 20-full size Electric.

iCombi Classic



	CombiMaster Plus XS	6-half size	10-half size
Electric	\$9,520	\$11,030	\$15,500
Nº: 3 AC 208/240 V	CA2ERRA.0000247	CB2ERRA.0000249	CD2ERRA.0000252
Nº: 3 AC 480 V	–	CB2ERRA.0000250	CD2ERRA.0000253
Nº: 2 AC 208/240 V	CA2ERRA.0000248	CB2ERRA.0000251	–
Connected load	5.7 kW	10.8 kW	18.9 kW
Voltage	3 AC 208/240 V	3 AC 208/240 V / 3AC 480 V	3 AC 208/240 V / 3AC 480 V
Weight	137 lb (62 kg)	244 lb (93 kg)	310 lb (121 kg)
Gas	–	\$13,150	\$17,990
Nº: Natural gas – 1 NAC 120 V	–	CB2GRRRA.0000267	CD2GRRRA.0000270
Nº: Natural gas – 2 NAC 208/240 V	–	CB2GRRRA.0000268	CD2GRRRA.0000271
Nº: Liquid gas – 1 NAC 120 V	–	CB2GRRRA.0000269	CD2GRRRA.0000272
Nº: Liquid gas – 2 NAC 208/240 V	–	–	–
Connection rating – Natural gas	–	49500 BTU (13 kW)	83500 BTU (22 kW)
Connection rating – Liquid gas	–	48500 BTU (13 kW)	82000 BTU (22 kW)
Weight	–	222 lb (101 kg)	306 lb (139 kg)
Capacity	3 x 2/3 GN; 12" x 14" x 2 1/2" 4 - 13" x 18" 1/2 sheet pans; 3 - 12 3/4" x 14" x 2 1/2" steam pans	6-13" x 18" 1/2 sheet pans; 6-12 3/4" x 20 7/8" steam pans; 6 x 1/1 GN; 12 x 1/2 GN	10-13" x 18" 1/2 sheet pans; 10-12 3/4" x 20 7/8" steam pans; 10 x 1/1 GN; 20 x 1/2 GN
Meals per day	20-80	30-100	80-150
Width	25 3/4 in (655 mm)	33 1/2 in (850 mm)	33 1/2 in (850 mm)
Depth (including door handle)	24 1/2 in (621 mm)	33 1/8 in (842 mm)	33 1/8 in (842 mm)
Height (including ventilation pipe)	23 1/2 in (594 mm)	31 5/8 in (804 mm)	41 7/8 in (1064 mm)

Options			
Left-side hinge for cooking cabinet door	\$553	\$553	\$553
Mobile rack package	–	\$463	\$565
Integrated fat drain	–	\$1,106	\$1,106
MarineLine	\$765	\$784	\$784
HeavyDutyLine	–	\$815	\$815
SecurityLine	–	\$1,655	\$1,655
Safety door lock	\$97	\$97	\$97
UltraVent installed	\$3,895	–	–
UltraVent Plus installed	\$5,216	–	–

Corresponding accessories can be found here:	Page [▶ 18]	Page [▶ 20]	Page [▶ 20]
--	-------------	-------------	-------------

More information and options can be found on Page [▶ 8] and on our website. Additional information on combinations of options and special voltages will also be provided on request.

iCombi Classic



6-full size	10-full size	20-half size	20-full size
\$16,850	\$22,400	\$28,680	\$41,110
CC2ERRA.0000255	CE2ERRA.0000258	CF2ERRA.0000261	CG2ERRA.0000264
CC2ERRA.0000256	CE2ERRA.0000259	CF2ERRA.0000262	CG2ERRA.0000265
–	–	–	–
22.4 kW	37.4 kW	37.2 kW	67.9 kW
3 AC 208/240 V / 3AC 480 V	3 AC 208/240 V / 3AC 480 V	3 AC 208/240 V / 3AC 480 V	3 AC 208/240 V / 3AC 480 V
346 lb (131 kg)	412 lb (160 kg)	590 lb (231 kg)	771 lb (304 kg)
\$19,550	\$25,980	\$32,400	\$46,450
–	–	CF2GRRRA.0000277	–
CC2GRRRA.0000273	CE2GRRRA.0000275	CF2GRRRA.0000278	CG2GRRRA.0000280
–	–	CF2GRRRA.0000279	–
CC2GRRRA.0000274	CE2GRRRA.0000276	–	CG2GRRRA.0000281
106500 BTU (28 kW)	152000 BTU (40 kW)	159500 BTU (42 kW)	303500 BTU (80 kW)
104000 BTU (28 kW)	148500 BTU (40 kW)	156000 BTU (42 kW)	296500 BTU (80 kW)
282 lb (128 kg)	405 lb (184 kg)	608 lb (276 kg)	817 lb (371 kg)
6-18" x 26" full sheet pans; 12-12 3/4" x 20 7/8" steam pans; 6 x 2/1 GN / 12 x 1/1 GN	10-18" x 26" full sheet pans; 20-12 3/4" x 20 7/8" steam pans; 10 x 2/1 GN / 20 x 1/1 GN	20-13" x 18" 1/2 sheet pans; 20-12 3/4" x 20 7/8" steam pans; 20 x 1/1 GN; 40 x 1/2 GN	20-18" x 26" full sheet pans; 40-12 3/4" x 20 7/8" steam pans; 20 x 2/1 GN / 40 x 1/1 GN
60-160	150-300	150-300	300-500
42 1/4 in (1072 mm)	42 1/4 in (1072 mm)	34 1/2 in (877 mm)	42 5/8 in (1082 mm)
41 in (1042 mm)	41 in (1042 mm)	35 7/8 in (913 mm)	44 in (1117 mm)
31 5/8 in (804 mm)	41 7/8 in (1064 mm)	73 3/4 in (1872 mm)	73 3/4 in (1872 mm)

Option			
\$553	\$553	–	–
\$648	\$781	–	–
\$1,106	\$1,106	\$4,677	\$4,677
\$784	\$784	\$1,541	\$1,541
\$815	\$815	\$1,690	\$1,755
\$1,655	\$1,655	\$3,764	\$3,764
\$97	\$97	\$244	\$244
–	–	–	–
–	–	–	–

Page [▶ 24]	Page [▶ 24]	Page [▶ 28]	Page [▶ 28]
-------------	-------------	-------------	-------------

Options - iCombi Pro and iCombi Classic



Cooking cabinet door with left-side hinges - tabletop units

Tabletop units can be ordered with the door hinges on the left in order to facilitate cooking system access in certain kitchen situations.

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	\$553	\$553	\$553	\$553	\$553	–	–
iCombi Classic	–	\$553	\$553	\$553	\$553	–	–
CombiMaster Plus	\$553	–	–	–	–	–	–



Mobile oven rack package for tabletop units

The hinging racks are replaced with a mobile rack and the corresponding run-in rail. Suitable transport trolleys to allow safe, convenient loading and unloading of your cooking system can be found on Page [▶ 21] and Page [▶ 25].

Features:

- Mobile rack suitable for GN accessories (various mobile racks are available with different numbers of racks)
- Run-in rail, standard, for transport trolleys - tabletop units

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	–	\$463	\$565	\$648	\$781	–	–
iCombi Classic	–	\$463	\$565	\$648	\$781	–	–



Mobile rack package for Combi-Duo

The hinging racks are replaced with a mobile rack and the corresponding run-in rail. Suitable transport trolleys to allow safe, convenient loading and unloading of your cooking system can be found on Page [▶ 14], Page [▶ 22], Page [▶ 16], and Page [▶ 26].

Features: (to be configured for each cooking system)

- Mobile rack suitable for GN accessories (various mobile racks are available with different numbers of racks)
- Combi-Duo run-in rail for Combi-Duo transport trolley

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	–	\$463	\$565	\$648	\$781	–	–
iCombi Classic	–	\$463	\$565	\$648	\$781	–	–

Integrated fat drain

Dripping fat is automatically and reliably diverted out of the cooking cabinet and into special fat collection containers. Using this option with cooking systems of Size 6-half size, 10-half size, 6-full size, or 10-full size requires the use of Stand II, Stand IV or a leveling kit.

Features:

- Basic components: Fat drip pan, pipes, and collection container
- Information on specific components is available in the Fact File: Integrated fat drain

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	–	\$1,106	\$1,106	\$1,106	\$1,106	\$4,677	\$4,677
iCombi Classic	–	\$1,106	\$1,106	\$1,106	\$1,106	\$4,677	\$4,677

Accessories for integrated fat drain

60.73.309	Transport trolley for containers - integrated fat drain system (Combi-Duo and floor units)	\$525
-----------	--	-------



Options - iCombi Pro and iCombi Classic



MarineLine for electric units

Allows efficient, safe operation of your cooking system on ships, even on rough seas.

Features:

- Tabletop units (Sizes XS, 6-half size, 10-half size, 6-full size, 10-full size) can be screwed to securable stands, preventing them from tipping and slipping. The available stands are listed on Page [► 18], Page [► 20] and Page [► 24]
- Stainless steel feet and an additional anchoring kit allow floor units (Sizes 20-half size, 20-full size) to be screwed or welded in place, securing them against tipping and slipping
- Freely adjustable door stop to dampen movement when opening and closing door, or to secure door in open position
- Specially designed hinging racks and mobile oven racks secure cooking accessories against accidentally slipping out while being used
- Compliant with USPHS hygiene requirements
- Certified by Germanischer Lloyd

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	\$765	\$784	\$784	\$784	\$784	\$1,541	\$1,541
iCombi Classic	–	\$784	\$784	\$784	\$784	\$1,541	\$1,541
CombiMaster Plus	\$765	–	–	–	–	–	–

MarineLine accessories

60.76.348	Impact protection grille for doors with right-side hinges, Size 6-half size	\$484
60.76.350	Protective grille for left-hinged doors, Size 6-half size	\$484
60.76.353	Impact protection grille for doors with right-side hinges, Size 10-half size	\$573
60.76.355	Protective grille for left-hinged doors, Size 10-half size	\$573
60.76.351	Impact protection grille for doors with right-side hinges, Size 6-full size	\$602
60.76.352	Protective grille for left-hinged doors, Size 6-full size	\$602
60.76.356	Impact protection grille for doors with right-side hinges, Size 10-full size	\$708
60.76.412	Protective grille for left-hinged doors, Size 10-full size	\$708
60.76.413	Impact protection grille for door, Size 20-half size	\$805
60.76.414	Impact protection grille for door, Size 20-full size	\$1,049



SecurityLine

Specific security elements protect the cooking system against deliberate vandalism and prevent it from being used to harm people. Only available on cooking systems with right-side door hinges.

Features:

- Lockable control panel
- Lockable cooking cabinet door with integrated stainless steel grille on security model
- Mobile oven rack with retractable handle for Sizes 20-half size and 20-full size
- Lockable hand shower and care drawer for Sizes 20-half size and 20-full size
- Opening mechanism in cooking cabinet (floor models)
- Core temperature probe is made with the use of flexible metal
- 20 full size cart has 12 L Rails with distance of 4 3/8" (112 mm)

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	–	\$1,655	\$1,655	\$1,655	\$1,655	\$3,764	\$3,764
iCombi Classic	–	\$1,655	\$1,655	\$1,655	\$1,655	\$3,764	\$3,764

Options - iCombi Pro and iCombi Classic



HeavyDutyLine

HeavyDutyLine cooking systems are designed for use under challenging conditions, such as high ambient temperatures, long operating times and severe mechanical stress, making them perfect for use in environments such as production kitchens.


Features:

- Metal element(s) to protect the control panel, the selection dial, etc.
- Reinforced mobile rack for Sizes 20-half size and 20-full size
- One external USB core temperature probe (instead of internal core temperature probe)
- Additional accessories prepare unit for addition of lateral impact protection elements for door and side walls

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	–	\$815	\$815	\$815	\$815	\$1,690	\$1,755
iCombi Classic	–	\$815	\$815	\$815	\$815	\$1,690	\$1,755

HeavyDutyLine accessories

60.76.106	Lateral impact protection - 6-half size, 10-half size. Only in combination with Stand II	\$1,355
60.76.354	Lateral impact protection - 6-full size, 10-full size. Only in combination with Stand II	\$1,688
60.76.367	Lateral impact protection - left 20-half size	\$1,015
60.76.361	Lateral impact protection - right 20-half size	\$863
60.76.292	Lateral impact protection - left 20-full size	\$1,194
60.76.112	Lateral impact protection - right 20-full size	\$995
60.76.348	Impact protection grille for doors with right-side hinges, Size 6-half size	\$484
60.76.353	Impact protection grille for doors with right-side hinges, Size 10-half size	\$573
60.76.351	Impact protection grille for doors with right-side hinges, Size 6-full size	\$602
60.76.356	Impact protection grille for doors with right-side hinges, Size 10-full size	\$708
60.76.413	Impact protection grille for door, Size 20-half size	\$805
60.76.414	Impact protection grille for door, Size 20-full size	\$1,049



Safety door lock

The safety door lock prevents the cooking cabinet door from being opened too quickly thus protecting against injuries from escaping hot steam.

Features:

- Opening cooking cabinet door on tabletop units requires 2-step pressing of door handle
- Opening cooking cabinet door on floor units requires pressing of additional foot pedal

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	\$97	\$97	\$97	\$97	\$97	\$244	\$244
iCombi Classic	–	\$97	\$97	\$97	\$97	\$244	\$244
CombiMaster Plus	\$97	–	–	–	–	–	–

Lockable control panel

Protects against unauthorized access and vandalism thanks to a practically indestructible plastic cover (LEXAN) with hasp lock (lock and key not included). Only available on cooking systems with right-side door hinges.

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	–	\$826	\$826	\$826	\$826	\$826	\$826
iCombi Classic	–	\$826	\$826	\$826	\$826	\$826	\$826



Options - iCombi Pro and iCombi Classic



MobilityLine

Special accessories for mobile use in event catering or banqueting events.

Features:

- For tabletop units, Size 6-half size, 10-half size, 6-full size and 10-full size: Stand II MobilityLine with 14 pairs of supporting rails. Open on two sides, with side walls, reinforced sides. Four stainless steel casters, diameter 7 3/4 in (200 mm). Overlay with lateral impact protection supports
- For floor units, Size 20-half size and 20-full size: Mobile frame with 4 stainless-steel casters and locking brake

60.31.164	Stand II, Version MobilityLine Size 6-half size, 10-half size	\$2,835
60.31.165	Stand II, Version MobilityLine Size 6-full size, 10-full size	\$3,423
60.21.334	Mobile base frame 20-half size	\$3,470
60.22.496	Mobile base frame 20-full size	\$3,470

Protection for control panel

Flip-up control panel protection made of practically indestructible plastic (LEXAN).

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	–	\$311	\$311	\$311	\$311	\$311	\$311
iCombi Classic	–	\$311	\$311	\$311	\$311	\$311	\$311

Cooking systems Size XS with pre-assembled UltraVent or UltraVent Plus

Pre-assembled recirculating hoods make Size XS cooking systems very quick and easy to install on-site.

	UltraVent, pre-assembled on XS	UltraVent Plus, pre-assembled on XS
iCombi Pro	\$3,895	\$5,216
CombiMaster Plus	\$3,895	\$5,216

Ethernet interface

The Ethernet interface (RJ45) allows wired connections of cooking systems to the Internet, so that they can be connected to ConnectedCooking.

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	●	●	●	●	●	●	●
iCombi Classic	–	\$86	\$86	\$86	\$86	\$86	\$86
CombiMaster Plus	\$86	–	–	–	–	–	–

WiFi and Ethernet interface

Users have the option of networking cooking systems using a WiFi interface (IEEE 802.11 Standard) or a wired Ethernet connection (RJ45) via the port, so that they can be connected to ConnectedCooking.

	XS	6-half size	10-half size	6-full size	10-full size	20-half size	20-full size
iCombi Pro	●	●	●	●	●	●	●
iCombi Classic	–	\$104	\$104	\$104	\$104	\$104	\$104

Combi-Duo XS



Combi-Duo kit for iCombi Pro XS and CombiMaster Plus XS

Kit to allow proper installation of one RATIONAL cooking system on top of another (no base included in kit). Allows users to work in two different cooking modes at once without needing additional kitchen space.

60.73.768	Size XS on Size XS right-side hinges	\$730
60.74.276	Size XS on Size XS left-side hinges	\$730
60.74.780	Size XS on Size XS right-side hinges, Marine	\$960
60.74.929	Size XS on Size XS left-side hinges, Marine	\$960

Stand I for Combi-Duo

Open on all sides.



60.31.020	Standard, Dimensions W D H: 24 7/8 21 7/8 21 3/4 in (634 558 555 mm)	\$589
60.31.170	With castersDimensions W D H: 26 7/8 25 3/4 22 1/4 in (683 656 567 mm)	\$878

Stand II for Combi-Duo

Four sets of support rails with a storage compartment. Open on two sides, with side walls.



60.31.046	Standard, Dimensions W D H: 25 1/8 22 1/8 21 7/8 in (639 563 556 mm)	\$1,157
60.31.058	With anchoring (MarineLine), Dimensions W D H: 27 1/8 24 1/8 21 7/8 in (689 613 557 mm)	\$1,331



UltraVent and UltraVent Plus

UltraVent: Recirculating hood to capture and divert steam. No external connection necessary.

UltraVent Plus: Recirculating hood to capture and divert steam. Special filter technology reduces bothersome smoke. No external connection necessary.

60.74.254	UltraVent XS, 1 NAC 120 V electrical connection, Dimensions W D H: 25 3/4 22 3/4 9 1/2 in (657 580 240 mm)	\$3,963
60.74.407	UltraVent Plus XS, 1 NAC 120 V electrical connection, Dimensions W D H: 25 3/4 22 3/4 12 7/8 in (657 580 329 mm)	\$5,284

Adapter kit

For adapting an existing single UltraVent XS or UltraVent Plus XS to a Combi-Duo setup.

60.73.945	Adapter kit - UltraVent XS and UltraVent Plus XS for Combi-Duo	\$183
-----------	--	-------

Combi-Duo 6-half size and 10-half size



Combi-Duo kit

Kit to allow proper installation of one RATIONAL cooking system on top of another (no base included in kit). Allows users to work in two different cooking modes at once without needing additional kitchen space.

	Lower cooking system		Upper cooking system - electric		Upper cooking system - gas
			XS	6-half size	6-half size
Standard	Electric	6-half size	I	E	E
		10-half size	I	E	E
	Gas	6-half size	G	G	G
		10-half size	G	–	–
MarineLine	Electric	6-half size	–	K	–
		10-half size	–	K	–

E	60.73.991	Combi-Duo Size 6-half size E/G on Size 6-half size or Size 10-half size E 24h	\$895
G	60.75.751	Combi-Duo Size 6-half size E/G or Size XS on Size 6-half size G 24h	\$1,253
I	60.75.755	Combi-Duo Size XS on Size 6-half size E	\$1,253
K	60.76.708	Combi-Duo Size 6-half size E on Size 6-half size E or Size 10-half size E MarineLine	\$1,253



Mobile Combi-Duo kit

Kit with height-adjustable rollers. Use with 6-half size on 10-half size electric. Height adjustment by up to 3/4 in (20 mm); three settings.

60.31.622	Sizes 6-half size, 10-half size Dimensions W D H: 37 2/7 25 3 1/8 in (948 634 80 mm)	\$401
-----------	---	-------



Stand I for Combi-Duo 6-half size on 6-half size or on 10-half size E

Open on all sides.

60.31.200	Standard, Dimensions W D H: 33 3/4 26 7/8 7 3/4 in (860 685 200 mm)	\$592
60.31.201	With height-adjustable casters, Dimensions W D H: 34 3/4 30 7 3/4 in (883 763 200 mm)	\$891
60.31.202	With anchoring (MarineLine), Dimensions W D H: 34 3/4 27 7/8 7 3/4 in (885 710 200 mm)	\$750



UltraVent and UltraVent Plus

UltraVent: Recirculating hood to capture and divert steam. No external connection necessary.

UltraVent Plus: Recirculating hood to capture and divert steam. Special filter technology reduces bothersome smoke. No external connection necessary.

60.76.179	UltraVent Combi-Duo 6-half size, 10-half size 1 NAC 120 V electrical connection, Dimensions W D H: 33 1/2 38 1/8 12 1/4 in (854 970 313 mm)	\$4,622
60.76.177	UltraVent Plus Combi-Duo 6-half size, 10-half size 1 NAC 120 V electrical connection, Dimensions W D H: 33 1/2 38 1/8 15 3/4 in (854 970 403 mm)	\$7,689

Hand shower cover

Securely locks the hand shower opening in the base. The kit includes a cover and a plug, and provides hygienically safe closure of water lines when disassembling the hand shower, for example on the lower cooking system of a Combi-Duo.

87.01.790S	Hand shower cover	\$76
------------	-------------------	------

Combi-Duo 6-half size and 10-half size



Combi-Duo transport trolley for mobile rack

Transport trolley can be adjusted to fit the specific installation height.


60.75.388	For Combi-Duo, Dimensions W D H: 22 1/4 33 1/8 48-55 5/6 in (568 844 1218-1478 mm)	\$1,610
-----------	---	---------



Combi-Duo run-in rail for mobile racks

The run-in rail is needed in order to use a mobile rack in the cooking Combi-Duo.

60.75.761	Combi-Duo run-in rail for mobile racks	\$189
-----------	--	-------



Integrated fat drain kit for Combi-Duo

Expansion of integrated fat drain option (page [▶ 8]): Pipes, anchoring materials, and containers.

60.75.873	Integrated fat drain kit for installation on leveling kit	\$935
60.75.406	Integrated grease drain kit for installation on Stand I Combi-Duo	\$765



Transport trolley for containers

Enables safe transport of filled canisters/containers.

60.73.309	Transport trolley for integrated grease drain system (Combi-Duo and floor units)	\$525
-----------	--	-------

Combi-Duo 6-full size and 10-full size



Combi-Duo kit

Kit to allow proper installation of one RATIONAL cooking system on top of another (no base included in kit). Allows users to work in two different cooking modes at once without needing additional kitchen space.

			Upper cooking system - electric			Upper cooking system - gas	
			XS	6-half size	6-full size	6-half size	6-full size
Standard	Electric	6-full size	J	J	F	J	F
		10-full size	J	–	F	–	F
	Gas	6-full size	H	H	H	H	H
		10-full size	H	–	–	–	–
MarineLine	Electric	6-full size Right-side hinge	–	–	L	–	–
		10-full size Right-side hinge	–	–	L	–	–
		6-full size Left-side hinge	–	–	M	–	–
		10-full size Left-side hinge	–	–	M	–	–

F	60.74.725	Combi-Duo Size 6-full size E/G on Size 6-full size or Size 10-full size E 24h	\$1,170
H	60.75.752	Combi-Duo Size 6-half size, Size 6-full size E/G or Size XS on Size 6-full size G 24h	\$1,639
J	60.75.756	Combi-Duo Size 6-half size E/G or Size XS on Size 6-full size E	\$1,639
L	60.76.709	Combi-Duo Size 6-full size on Size 6-full size E or 10-full size E right-side hinge MarineLine	\$1,639
M	60.76.710	Combi-Duo Size 6-full size on Size 6-full size E or 10-full size E left-side hinge MarineLine	\$1,639



Mobile Combi-Duo kit

Kit with height-adjustable rollers. Use with 6-full size on 10-full size electric. Height adjustment by up to 3/4 in (20 mm); three settings.

60.31.635	Sizes 6-full size, 10-full size Dimensions W D H: 46 32 5/6 3 1/8 in (1170 834 80 mm)	\$436
-----------	--	-------



Stand I for Combi-Duo 6-full size on 6-full size or on 10-full size E

Open on all sides.

60.31.203	Standard, Dimensions W D H: 42 1/2 34 3/4 7 3/4 in (1082 885 200 mm) 24h	\$734
60.31.204	With height-adjustable casters, Dimensions W D H: 43 1/2 38 1/8 7 3/4 in (1105 969 200 mm) 24h	\$1,034
60.31.205	With anchoring (MarineLine), Dimensions W D H: 43 1/2 35 3/4 7 3/4 in (1107 910 200 mm)	\$864



UltraVent, UltraVent Plus

UltraVent: Recirculating hood to capture and divert steam. No external connection necessary.

UltraVent Plus: Recirculating hood to capture and divert steam. Special filter technology reduces bothersome smoke. No external connection necessary.

60.76.180	UltraVent Combi-Duo 6-full size, 10-full size 1 NAC 120 V electrical connection, Dimensions W D H: 42 1/4 46 12 1/4 in (1075 1170 313 mm)	\$5,417
60.76.178	UltraVent Plus Combi-Duo 6-full size, 10-full size 1 NAC 120 V electrical connection, Dimensions W D H: 42 1/4 46 16 in (1075 1170 407 mm)	\$8,404

Combi-Duo 6-full size and 10-full size

Hand shower cover

Securely locks the hand shower opening in the base. The kit includes a cover and a plug, and provides hygienically safe closure of water lines when disassembling the hand shower, for example on the lower cooking system of a Combi-Duo.

87.01.790S	Hand shower cover	\$76
------------	-------------------	------

Combi-Duo transport trolley for mobile rack

Transport trolley can be adjusted to fit the specific installation height.


60.75.387	For Combi-Duo, Dimensions W D H: 30 7/8 38 1/2 48-55 5/6 in (785 979 1218-1418 mm)	\$2,036
-----------	---	---------



Combi-Duo run-in rail for mobile racks

The run-in rail is needed in order to use a mobile rack in the cooking Combi-Duo.

60.75.760	Combi-Duo run-in rail for mobile racks	\$206
-----------	--	-------



Integrated fat drain kit for Combi-Duo

Expansion of integrated fat drain option (page [▶ 8]): Pipes, anchoring materials, and containers.

60.75.876	Integrated fat drain kit for installation on leveling kit	\$1,029
60.75.411	Integrated fat drain kit for installation on Stand I Combi-Duo	\$843

Transport trolley for containers

Enables safe transport of filled canisters/containers.

60.73.309	Transport trolley for integrated grease drain system (Combi-Duo and floor units)	\$525
-----------	--	-------



iCombi care products



Active Green cleaner tabs for iCombi Pro and iCombi Classic

The new, highly effective, phosphate- and phosphorous-free recipe cuts cleaning chemical requirements by up to 50%.


56.01.535	Active Green cleaner tabs, 150x	\$136
-----------	---------------------------------	-------



Cleaner tabs for SelfCookingCenter and CombiMaster Plus (from 05/2017 onward)

Cleaner tabs with high-intensity active ingredients complex for reliable, high-performance cleaning.

56.00.210A	Cleaner tabs, 100x	\$97
------------	--------------------	------



Care tabs for iCombi Pro, iCombi Classic and SelfCookingCenter with Efficient CareControl

Care substances provide active protection against limescale buildup in the cooking cabinet and the steam generator. Safe operation without water softeners or expensive, time-consuming manual descaling.

56.00.562	Care tabs, 150x	\$119
-----------	-----------------	-------



Rinse aid tabs for all SelfCookingCenter models without Efficient CareControl and CombiMaster Plus models (from 05/2017 onward)

Active protection and extended product life thanks to highly effective care substances. The cooking cabinet is left hygienically clean and sparkling.

56.00.211	Rinse aid tabs, 50x	\$65
-----------	---------------------	------



Defoamer tabs for iCombi Pro, iCombi Classic, SelfCookingCenter and CombiMaster Plus (from 05/2017 onward)

Reduces heavy foaming in certain water types during cleaning.

56.00.598	Defoamer tabs, 120x	\$77
-----------	---------------------	------



Liquid detergent for all CombiMaster and ClimaPlus Combi models

9006.0136	Special soft cleaner – for soiling resulting from cooking applications <392°F (<200°C), non-corrosive, 2.65 gal (10 l)	\$72
9006.0153	Grill cleaner for stubborn dirt, 2.65 gal (10 l)	\$72
9006.0137	Rinse aid, 2.65 gal (10 l) (only for ClimaPlus Combi with CleanJet)	\$72



Descaler, descaler foot pump

Special care products for effective steam generator cleaning.

6006.0110US	Descaler, 4 x 1 gal	\$90
6004.0203	Foot pump for descaling the steam generator	\$124



Hand spray gun

Integrated pump mechanism for especially easy handling.

6004.0100	Hand spray gun for manual cleaning	\$43
-----------	------------------------------------	------

Accessories Size XS



Stand XS, ,

Elevates by 6 in (150 mm) to 7 1/2 in (190 mm) for installation on low work surfaces or compensation of slightly uneven work surfaces; allows fixed tabletop installation (MarineLine). Open on all sides. Dimensions W | D | H: 24 3/4 | 17 1/8 | 5 3/4 in (629 | 438 | 148 mm)

60.31.029	Standard	\$355
-----------	----------	-------



Stand I

Open on all sides.

60.31.018	Standard, Dimensions W D H: 24 7/8 21 7/8 36 5/8 in (634 558 931 mm) 24h	\$740
60.31.169	With castersDimensions W D H: 26 7/8 25 3/4 37 1/8 in (683 656 943 mm)	\$1,039



Stand II

8 sets of support rails with two storage compartments and intermediate level. Open on two sides, with side walls.

60.31.044	Standard, Dimensions W D H: 25 1/8 22 1/8 36 5/8 in (639 563 932 mm)	\$1,481
60.31.057	With anchoring (MarineLine), Dimensions W D H: 27 1/8 24 1/8 36 5/8 in (689 613 932 mm)	\$1,700



Wall mount

Allows space-saving wall mounting (anchoring materials not included). Anchors and anchoring materials should be chosen in consultation with an architect/structural engineer and the building owner.

60.30.968	Wall mount XS	\$399
-----------	---------------	-------



UltraVent

Recirculating hood to capture and divert steam. No external connection necessary.

1 NAC 120 V electrical connection, Dimensions W | D | H: 25 3/4 | 22 3/4 | 9 1/2 in (657 | 580 | 240 mm)

60.74.254	Size XS	\$3,963
-----------	---------	---------




UltraVent Plus

Recirculating hood to capture and divert steam. Special filter technology reduces bothersome smoke. No external connection necessary.

1 NAC 120 V electrical connection, Dimensions W | D | H: 25 3/4 | 22 3/4 | 12 7/8 in (657 | 580 | 329 mm)


60.74.407	Size XS	\$5,284
-----------	---------	---------



Hinging rack

60.74.331	7 racks (fit 1/2 sheet pans and GN containers)	\$330
60.73.724	11 racks (fit GN containers only)	\$280
60.74.449	Marine version (with load securing)	\$344

Accessories Size XS

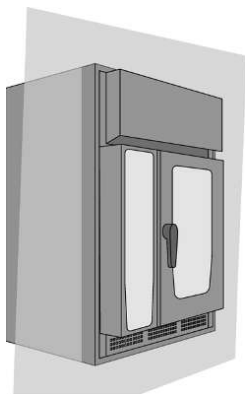

Integration kit

For proper integration of Size XS units, incl. UltraVent XS or UltraVent Plus XS, into a wall unit.

60.74.285	UltraVent XS including installation kit	\$4,047
60.74.408	UltraVent Plus XS including installation kit	\$5,834



Heat shield for side panel

Retrofitting a heat shield allows you to place a radiant heat source (e.g. grill) near the side panel.

60.74.182	Left heat shield, Size XS	\$221
-----------	---------------------------	-------



Condensation breaker

Accelerates the expulsion of steam and other vapors from the vent pipe.

60.74.037	Size XS (H 17 1/4 in (438 mm))	\$211
-----------	--------------------------------	-------



RATIONAL USB data storage device

42.00.162	USB 3.0 stick for cooking programs and HACCP data	\$20
-----------	---	------

Accessories - Sizes 6-half size and 10-half size



Leveling kit

Compensates elevation differences on floor or tabletop assembly. Height can be adjusted by as much as 3/4 in (20 mm).

60.74.795	Leveling kit Sizes 6-half size, 10-half size, Dimensions W D H: 33 3/8 24 1/8 1 3/8 in (850 614 35 mm)	\$294
-----------	---	-------



Mobile floor installation kit

Kit with height-adjustable rollers. Height adjustment by up to 3/4 in (20 mm); three settings.

60.31.622	Sizes 6-half size, 10-half size Dimensions W D H: 37 2/7 25 3 1/8 in (948 634 80 mm)	\$401
-----------	---	-------

Table extension

For installation atop a 27 1/2 in (700 mm) deep work surface.

60.11.655	Sizes 6-half size and 10-half size, Dimensions W D H: 33 3 7/8 1/8 in (840 100 2 mm)	\$59
-----------	---	------



Stand I

Open on all sides.

60.31.089	Standard, Dimensions W D H: 33 3/4 26 7/8 27 1/2 in (860 685 699 mm) 24h	\$592
60.31.095	With height-adjustable casters, Dimensions W D H: 34 3/4 30 27 1/2 in (883 763 699 mm) 24h	\$891
60.31.096	With anchoring (MarineLine), Dimensions W D H: 34 3/4 27 7/8 27 1/2 in (885 710 699 mm)	\$750



Stand II

14 pairs of supporting rails. Open on two sides, with side walls.

60.31.086	Standard, Dimensions W D H: 33 3/4 27 5/8 27 1/2 in (860 703 699 mm) 24h	\$1,309
60.31.103	With height-adjustable casters, Dimensions W D H: 34 3/4 30 1/4 27 1/2 in (883 769 699 mm) 24h	\$1,614
60.31.110	With anchoring (MarineLine), Dimensions W D H: 34 3/4 28 1/8 27 1/2 in (885 715 699 mm)	\$1,566



Stand II MobilityLine

14 pairs of supporting rails. Open on two sides, with side walls, reinforced sides. Four stainless steel casters, diameter 7 3/4 in (200 mm). Overlay with lateral impact protection supports.

60.31.164	MobilityLine, Dimensions W D H: 47 1/8 35 31 1/8 in (1199 892 792 mm)	\$2,835
-----------	---	---------



Stand III

14 pairs of supporting rails. Open on one side, with side walls, back wall and top cover.

60.31.091	Standard, Dimensions W D H: 33 3/4 27 5/8 27 1/2 in (860 703 699 mm)	\$1,604
60.31.105	With height-adjustable casters, Dimensions W D H: 34 3/4 30 1/4 27 1/2 in (883 769 699 mm)	\$1,976
60.31.112	With anchoring (MarineLine), Dimensions W D H: 34 3/4 28 1/8 27 1/2 in (885 715 699 mm)	\$1,770



Stand III Version UltraVent, Size 6-half size

20 pairs of supporting rails. Open on one side, with side walls, back wall and top cover. Elevated for installation with a recirculating hood.

60.31.214	Standard, Dimensions W D H: 33 3/4 27 5/8 37 1/8 in (860 703 945 mm)	\$1,903
60.31.215	With height-adjustable casters, Dimensions W D H: 35 1/2 30 1/4 37 1/8 in (904 769 945 mm)	\$2,248

Accessories - Sizes 6-half size and 10-half size



Stand IV

14 pairs of supporting rails. Closed on all sides, with 2 hinged doors.

60.31.093	Standard, Dimensions W D H: 33 3/4 27 5/8 27 1/2 in (860 703 699 mm)	\$2,330
60.31.107	With height-adjustable casters, Dimensions W D H: 34 3/4 30 1/4 27 1/2 in (883 769 699 mm)	\$2,656
60.31.114	With anchoring (MarineLine), Dimensions W D H: 34 3/4 28 1/8 27 1/2 in (885 715 699 mm)	\$2,520



UltraVent

Recirculating hood to capture and divert steam. No external connection necessary.

1 NAC 120 V electrical connection, Dimensions W | D | H: 33 1/2 | 34 3/4 | 12 1/4 in (854 | 885 | 313 mm)

60.76.179	Sizes 6-half size, 10-half size	\$4,622
-----------	---------------------------------	---------



UltraVent Plus

Recirculating hood to capture and divert steam. Special filter technology reduces bothersome smoke. No external connection necessary.

1 NAC 120 V electrical connection, Dimensions W | D | H: 33 1/2 | 34 3/4 | 15 3/4 in (854 | 885 | 403 mm)

60.76.177	Sizes 6-half size, 10-half size	\$7,689
-----------	---------------------------------	---------



Hinging rack, Size 6-half size

60.61.618	Standard, 6 racks (rail spacing 2 5/8 in (68 mm))	\$353
60.61.624	7 racks (rail spacing 2 5/8 in (68 mm))	\$353
60.61.615	5 racks (rail spacing 3 3/8 in (85 mm))	\$353
60.61.672	Marine version (USPHS), 6 racks (with load securing)	\$424



Hinging rack, Size 10-half size

60.11.550	Standard, 10 racks (rail spacing 2 5/8 in (68 mm))	\$452
60.11.547	8 racks (rail spacing 3 3/8 in (85 mm))	\$452
60.11.573	Marine version (USPHS), 10 racks (with load securing)	\$518



Mobile oven rack Size 6-half size

Only in combination with run-in rail for mobile racks.

60.61.700	Standard, 6 racks (rail spacing 2 1/2 in (64 mm))	\$751
-----------	---	-------



Mobile oven rack Size 10-half size

Only in combination with run-in rail for mobile racks.

60.11.400	Standard, 10 racks (rail spacing 2 1/2 in (64 mm))	\$895
60.11.601	8 racks (rail spacing 3 1/8 in (80 mm))	\$895



Run-in rail for mobile oven rack

Run-in rail is required if using a mobile rack.

60.75.115	Run-in rail Standard Sizes 6-half size, 10-half size	\$189
-----------	--	-------

Accessories - Sizes 6-half size and 10-half size




Transport trolley for mobile racks

The transport trolley allows mobile racks to be loaded and unloaded into the cooking system and safely transported.

The standard version is perfectly matched to the height of the stands.

Height-adjustable transport trolleys are suitable for cooking systems installed on work surfaces and elevated stands.

60.74.000	Standard, Dimensions W D H: 21 1/2 35 3/4 38 7/8 in (548 911 990 mm)	\$976
60.75.606	Height-adjustable, Dimensions W D H: 21 1/2 35 7/8 31 1/2-52 1/3 in (548 913 800-1330 mm)	\$1,562



Mobile plate rack

Mobile plate racks can be used to prepare plated food for service (plates up to 12 1/4 in (31 cm) in diameter) using Finishing. Only in combination with run-in rail for mobile racks.

60.61.702	Size 6-half size, 20 plates	\$917
60.61.701	Size 6-half size, 15 plates	\$866
60.11.581	Size 10-half size, 32 plates	\$1,065
60.11.602	Size 10-half size, 26 plates	\$974



Finishing systems for banquets

The Finishing system contains all the important accessories users need in order to start using Finishing immediately. Consists of mobile plate rack, Thermocover and transport trolley. Only in combination with run-in rail for mobile racks.

Save 15 % over individual purchase prices.


60.61.741	Size 6-half size, 20 plates	\$2,104
60.11.628	Size 10-half size, 32 plates	\$2,375
60.11.629	Size 10-half size, 26 plates	\$2,298



Thermocover

Special insulation materials keep food hot for up to 20 minutes after Finishing. Easy-to-use magnetic connection allows quick opening and closing.

6004.1007	Size 6-half size	\$582
6004.1009	Size 10-half size	\$753

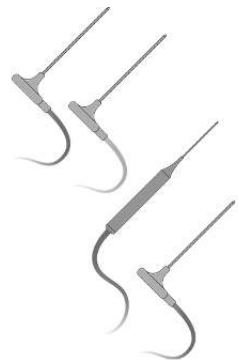

USB core temperature probe

Additional external core temperature probes can be connected easily via USB. With the two external core temperature probes (along with the internal core temperature probe), up to 3 different dishes can be monitored in the iCombi Pro at the same time in iProductionManager. The single external core temperature probe allows monitoring of one additional dish in the iCombi Pro, or can be used as a replacement for the iCombi Classic's internal core temperature probe. The sous-vide core temperature probe allows users to cook food inside vacuum pouches, monitoring the core temperature precisely.

60.76.314	2 external core temperature probes (iCombi Pro only) for tabletop units (available beginning Q1/2021)	\$1,123
60.76.316	1 Sous-vide core temperature probe for tabletop and floor units	\$876
60.76.317	1 external core temperature probe for tabletop units	\$656

Positioning aid for core temperature probe

Facilitates the correct placement of the core temperature probe in liquid and in soft or very small products. The positioning aid can be secured to mobile oven racks and hinging racks.

60.71.022	Sizes 6-half size, 10-half size, 6-full size, 10-full size, 20-half size and 20-full size	\$15
-----------	---	------

Accessories - Sizes 6-half size and 10-half size



Wall mount

Allows space-saving wall mounting (anchoring materials not included). Anchors and anchoring materials should be chosen in consultation with an architect/structural engineer and the building owner.

60.31.168	Wall bracket, Size 6-half size	\$691
-----------	--------------------------------	-------



Heat shield for side panel

Retrofitting a heat shield allows you to place a radiant heat source (e.g. grill) near the side panel.

60.75.110	Left heat shield, Size 6-half size 24h	\$256
60.75.113	Right heat shield, Size 6-half size	\$256
60.75.773	Left heat shield, Size 10-half size 24h	\$294
60.75.771	Right heat shield, Size 10-half size	\$294



Condensation breaker


Accelerates the expulsion of steam and other vapors from the vent pipe.

60.72.592	Sizes 6-half size, 10-half size, 6-full size and 10-full size (H 18 in (458 mm))	\$211
-----------	--	-------



RATIONAL USB data storage device

42.00.162	USB 3.0 stick for cooking programs and HACCP data	\$20
-----------	---	------



Accessory packages

See Special Accessories for descriptions.

60.72.107	Starter package, see Page [► 31]	\$466
60.72.108	Grill package, see Page [► 31]	\$672

Accessories - Sizes 6-full size and 10-full size



Leveling kit

Compensates elevation differences on floor or tabletop assembly. Height can be adjusted by as much as 3/4 in (20 mm).

60.74.597	Leveling kit Sizes 6-full size, 10-full size, Dimensions W D H: 42 1/8 32 1 3/8 in (1072 814 35 mm)	\$334
-----------	--	-------



Mobile floor installation kit

Kit with height-adjustable rollers. Use with 6-full size on 10-full size electric. Height adjustment by up to 3/4 in (20 mm); three settings.

60.31.635	Sizes 6-full size, 10-full size Dimensions W D H: 46 32 5/6 3 1/8 in (1170 834 80 mm)	\$436
-----------	--	-------



Stand I

Open on all sides.

60.31.090	Standard, Dimensions W D H: 42 1/2 34 3/4 27 1/2 in (1082 885 699 mm) 24h	\$734
60.31.102	With height-adjustable casters, Dimensions W D H: 43 1/2 37 7/8 27 1/2 in (1105 963 699 mm) 24h	\$1,034
60.31.109	With anchoring (MarineLine), Dimensions W D H: 43 1/2 35 3/4 27 1/2 in (1107 910 699 mm)	\$964



Stand II

14 pairs of supporting rails. Open on two sides, with side walls.

60.31.087	Standard, Dimensions W D H: 42 1/2 35 1/2 27 1/2 in (1082 903 699 mm) 24h	\$1,494
60.31.104	With height-adjustable casters, Dimensions W D H: 43 1/2 38 1/8 27 1/2 in (1105 969 699 mm) 24h	\$1,794
60.31.111	With anchoring (MarineLine), Dimensions W D H: 43 1/2 36 27 1/2 in (1107 915 699 mm)	\$1,754



Stand II MobilityLine

14 pairs of supporting rails. Open on two sides, with side walls, reinforced sides. Four stainless steel casters, diameter 7 3/4 in (200 mm). Overlay with lateral impact protection supports.

60.31.165	MobilityLine, Dimensions W D H: 55 7/8 42 7/8 31 1/8 in (1421 1092 792 mm)	\$3,423
-----------	--	---------



Stand III

14 pairs of supporting rails. Open on one side, with side walls, back wall and top cover.

60.31.092	Standard, Dimensions W D H: 42 1/2 35 1/2 27 1/2 in (1082 903 699 mm)	\$1,944
60.31.106	With height-adjustable casters, Dimensions W D H: 43 1/2 38 1/8 27 1/2 in (1105 969 699 mm)	\$2,243
60.31.113	With anchoring (MarineLine), Dimensions W D H: 43 1/2 36 27 1/2 in (1107 915 699 mm)	\$2,093



Stand III Version UltraVent, Size 6-full size

20 pairs of supporting rails. Open on one side, with side walls, back wall and top cover. Elevated for installation with a recirculating hood.

60.31.216	Standard, Dimensions W D H: 42 1/2 35 1/2 37 1/8 in (1082 903 945 mm)	\$2,243
60.31.217	With height-adjustable casters, Dimensions W D H: 43 1/2 38 1/4 37 1/8 in (1105 974 945 mm)	\$2,543

Accessories - Sizes 6-full size and 10-full size



Stand IV

14 pairs of supporting rails. Closed on all sides, with 2 hinged doors.

60.31.094	Standard, Dimensions W D H: 42 1/2 35 1/2 27 1/2 in (1082 903 699 mm)	\$2,537
60.31.108	With height-adjustable casters, Dimensions W D H: 43 1/2 38 1/8 27 1/2 in (1105 969 699 mm)	\$2,890
60.31.115	With anchoring (MarineLine), Dimensions W D H: 43 1/2 36 27 1/2 in (1107 915 699 mm)	\$2,727



UltraVent

Recirculating hood to capture and divert steam. No external connection necessary.

1 NAC 120 V electrical connection, Dimensions W | D | H: 42 1/4 | 42 5/8 | 12 1/4 in (1075 | 1085 | 313 mm)

60.76.180	Sizes 6-full size, 10-full size	\$5,417
-----------	---------------------------------	---------



UltraVent Plus

Recirculating hood to capture and divert steam. Special filter technology reduces bothersome smoke. No external connection necessary.

1 NAC 120 V electrical connection, Dimensions W | D | H: 42 1/4 | 42 5/8 | 16 in (1075 | 1085 | 407 mm)

60.76.178	Sizes 6-full size, 10-full size	\$8,404
-----------	---------------------------------	---------



Hinging rack, Size 6-full size

60.62.123	Standard, 6 racks (rail spacing 2 5/8 in (68 mm))	\$468
60.62.171	5 racks (rail spacing 3 3/8 in (85 mm))	\$468
60.62.168	7 racks (rail spacing 2 1/2 in (65 mm))	\$468
60.62.178	Marine version (USPHS), 6 racks (with load securing)	\$549



Hinging rack, Size 10-full size

60.12.133	Standard, 10 racks (rail spacing 2 5/8 in (68 mm))	\$522
60.12.146	Marine version (USPHS), 10 racks (with load securing)	\$628



Full Size Sheet Pan Adapter

For use of full size sheet pans 18" x 26". Combination of several adapters is possible for hinging racks only (max. 3 for Size 6-full size and 5 for Size 10-full size)

60.12.156	Full Size Sheet Pan Adapter Sizes 6-full size, 10-full size	\$82
-----------	---	------



Mobile oven rack Size 6-full size

Only in combination with run-in rail for mobile racks.

60.62.150	Standard, 6 racks (rail spacing 2 1/2 in (64 mm))	\$1,130
60.62.050	Adapter for sheet pans 18" x 26" (only for 6 racks)	\$314



Mobile oven rack Size 10-full size

Only in combination with run-in rail for mobile racks.

60.12.150	Standard, 10 racks (rail spacing 2 1/2 in (63 mm))	\$1,262
60.12.054	Adapter for sheet pans 18" x 26" (only for 10 racks)	\$361



Run-in rail for mobile oven rack

Run-in rail is required if using a mobile rack.

60.74.650	Run-in rail Standard Sizes 6-full size, 10-full size	\$229
-----------	--	-------

Accessories - Sizes 6-full size and 10-full size




Transport trolley for mobile racks

The transport trolley allows mobile racks to be loaded and unloaded into the cooking system and safely transported.

The standard version is perfectly matched to the height of the stands.

Height-adjustable transport trolleys are suitable for cooking systems installed on work surfaces and elevated stands.


60.73.999	Standard, Dimensions W D H: 28 7/8 39 1/8 38 7/8 in (735 996 990 mm)	\$1,302
60.75.605	Height-adjustable, Dimensions W D H: 28 7/8 38 7/8 31 1/2-52 1/3 in (735 990 800-1330 mm)	\$2,073



Mobile plate rack

Mobile plate racks can be used to prepare plated food for service (plates up to 12 1/4 in (31 cm) in diameter) using Finishing. Only in combination with run-in rail for mobile racks.

60.62.017	Size 6-full size, 34 plates	\$1,226
60.12.022	Size 10-full size, 52 plates	\$1,630
60.12.062	Size 10-full size, 42 plates	\$1,403



Finishing systems for banquets

The Finishing system contains all the important accessories users need in order to start using Finishing immediately. Consists of mobile plate rack, Thermocover and transport trolley. Only in combination with run-in rail for mobile racks.

Save 15 % over individual purchase prices.

60.62.196	Size 6-full size, 34 plates	\$2,836
60.12.154	Size 10-full size, 42 plates	\$3,160
60.12.155	Size 10-full size, 52 plates	\$3,353



Thermocover

Special insulation materials keep food hot for up to 20 minutes after Finishing. Easy-to-use magnetic connection allows quick opening and closing.

6004.1016	Size 6-full size	\$808
6004.1014	Size 10-full size	\$1,013



USB core temperature probe

Additional external core temperature probes can be connected easily via USB. With the two external core temperature probes (along with the internal core temperature probe), up to 3 different dishes can be monitored in the iCombi Pro at the same time in iProductionManager. The single external core temperature probe allows monitoring of one additional dish in the iCombi Pro, or can be used as a replacement for the iCombi Classic's internal core temperature probe. The sous-vide core temperature probe allows users to cook food inside vacuum pouches, monitoring the core temperature precisely.

60.76.314	2 external core temperature probes (iCombi Pro only) for tabletop units (available beginning Q1/2021)	\$1,123
60.76.316	1 Sous-vide core temperature probe for tabletop and floor units	\$876
60.76.317	1 external core temperature probe for tabletop units	\$656

Positioning aid for core temperature probe

Facilitates the correct placement of the core temperature probe in liquid and in soft or very small products. The positioning aid can be secured to mobile oven racks and hinging racks.

60.71.022	Sizes 6-half size, 10-half size, 6-full size, 10-full size, 20-half size and 20-full size	\$15
-----------	---	------

Accessories - Sizes 6-full size and 10-full size



Heat shield for side panel

Retrofitting a heat shield allows you to place a radiant heat source (e.g. grill) near the side panel.

60.75.769	Left heat shield, Size 6-full size 24h	\$322
60.75.768	Right heat shield, Size 6-full size	\$306
60.75.776	Left heat shield, Size 10-full size 24h	\$367
60.75.774	Right heat shield, Size 10-full size	\$351



Condensation breaker


Accelerates the expulsion of steam and other vapors from the vent pipe.

60.72.592	Sizes 6-half size, 10-half size, 6-full size and 10-full size (H 18 in (458 mm))	\$211
-----------	--	-------



RATIONAL USB data storage device

42.00.162	USB 3.0 stick for cooking programs and HACCP data	\$20
-----------	---	------



Accessory packages

See Special Accessories for descriptions.

60.72.107	Starter package, see Page [► 31]	\$466
60.72.108	Grill package, see Page [► 31]	\$672

Accessories Size 20-half size and 20-full size



Mobile oven rack Size 20-half size

For fast and convenient loading and unloading of floor units. Dimensions W | D | H:
22 | 32 3/8 | 68 1/2 in (561 | 824 | 1743 mm)

60.21.331	Standard, 20 racks (rail spacing 2 1/2 in (65 mm))	\$2,478
60.21.287	15 racks (rail spacing 3 1/4 in (84 mm))	\$2,478
60.21.288	16 racks (rail spacing 3 1/8 in (80 mm))	\$2,478
60.21.289	17 racks (rail spacing 2 7/8 in (74 mm))	\$2,478
60.21.319	SecurityLine, 20 racks (rail spacing 2 1/2 in (65 mm))	\$3,173
60.21.291	20 racks, reinforced HeavyDuty/Marine version (rail spacing 2 1/2 in (65 mm))	\$2,726



Mobile oven rack Size 20-full size

For fast and convenient loading and unloading of floor units. Dimensions W | D | H:
30 3/8 | 39 7/8 | 68 1/2 in (772 | 1013 | 1742 mm)

60.22.490	Standard, 20 racks (rail spacing 2 1/2 in (65 mm))	\$3,117
60.22.394	15 racks (rail spacing 3 1/4 in (84 mm))	\$3,117
60.22.395	16 racks (rail spacing 3 1/8 in (80 mm))	\$3,117
60.22.396	17 racks (rail spacing 2 7/8 in (74 mm))	\$3,117
60.22.440	SecurityLine, 20 racks (rail spacing 2 1/2 in (65 mm))	\$3,990
60.22.447	20 racks, reinforced HeavyDuty/Marine version (rail spacing 2 1/2 in (65 mm))	\$3,429

Adapter for 18" x 26" sheet pans, for 20-full size mobile rack with 20 racks

Allows use of full size sheet pans without stainless steel grid.


60.22.392	Top	\$439
60.22.393	Below	\$439



Mobile plate rack

Mobile plate racks can be used to prepare plated food for service (plates up to 12 1/4 in (31 cm) in diameter) using Finishing.

60.21.293	Size 20-half size, 60 plates	\$2,698
60.21.294	Size 20-half size, 50 plates	\$2,698
60.22.400	Size 20-full size, 120 plates	\$4,142
60.22.399	Size 20-full size, 100 plates	\$3,576
60.22.398	Size 20-full size, 84 plates 24h	\$3,332




Finishing systems for banquets

The Finishing system contains all the important accessories users need in order to start using Finishing immediately. Consists of mobile plate rack and Thermocover.

Save 15 % over individual purchase prices.

60.21.332	Size 20-half size, 60 plates	\$3,465
60.21.333	Size 20-half size, 50 plates	\$3,465
60.22.493	Size 20-full size, 120 plates	\$5,152
60.22.492	Size 20-full size, 100 plates	\$4,671
60.22.491	Size 20-full size, 84 plates	\$4,463

Accessories Size 20-half size and 20-full size



Thermocover

Special insulation materials allow food to be parked hot for up to 20 minutes after Finishing. Easy-to-use magnetic connection allows quick opening and closing.

6004.1011	Size 20-half size	\$1,379
6004.1012	Size 20-full size	\$1,919



Fat drain set for mobile oven rack

Only in combination with optional integrated fat drain.

60.75.107	Size 20-half size	\$1,313
60.75.108	Size 20-full size	\$1,559



Transport trolley for containers

Enables safe transport of filled canisters/containers.

60.73.309	Transport trolley for integrated grease drain system (Combi-Duo and floor units)	\$525
-----------	--	-------



Handle holder for mobile rack

For secure storage of the mobile oven rack handle. Handle holder is included in delivery of unit.


60.75.895	Sizes 20-half size, 20-full size	\$30
-----------	----------------------------------	------



Run-in ramp for mobile racks

Inclines (up to 3%) in the kitchen floor can be compensated for with the trolley ramp. These highly stable RATIONAL transport trolleys, which are designed for maximum loads, are ideal for easy loading and unloading of mobile racks.

60.21.262	Size 20-half size	\$1,493
60.22.380	Size 20-full size	\$1,728



Unit height extension

Increases ground clearance underneath the unit by 2 3/4 in (70 mm). Must be used in conjunction with a mobile rack height extension.

60.70.407	Sizes 20-half size, 20-full size	\$308
-----------	----------------------------------	-------

Mobile rack height extension

Must be used in conjunction with a unit height extension.

60.21.297	Size 20-half size	\$566
60.22.386	Size 20-full size	\$753

Accessories Size 20-half size and 20-full size



USB core temperature probe

Additional external core temperature probes can be connected easily via USB. With the two external core temperature probes (along with the internal core temperature probe), up to 3 different dishes can be monitored in the iCombi Pro at the same time in iProductionManager. The single external core temperature probe allows monitoring of one additional dish in the iCombi Pro, or can be used as a replacement for the iCombi Classic's internal core temperature probe. The sous-vide core temperature probe allows users to cook food inside vacuum pouches, monitoring the core temperature precisely.

60.76.315	2 external core temperature probes (iCombi Pro only) for Floor units (available beginning Q1/2021)	\$1,123
60.76.316	1 Sous-vide core temperature probe for tabletop and floor units	\$876
60.76.318	1 external core temperature probe for floor units	\$656

Positioning aid for core temperature probe

Facilitates the correct placement of the core temperature probe in liquid and in soft or very small products. The positioning aid can be secured to mobile oven racks and hinging racks.

60.71.022	Sizes 6-half size, 10-half size, 6-full size, 10-full size, 20-half size and 20-full size	\$15
-----------	---	------



Heat shield for side panel

Retrofitting a heat shield allows you to place a radiant heat source (e.g. grill) near the side panel.

60.75.829	Left heat shield, Size 20-half size	\$405
60.75.826	Left heat shield, Size 20-full size	\$496



Condensation breaker

Accelerates the expulsion of steam and other vapors from the vent pipe.

60.75.326	Sizes 20-half size and 20-full size (H 18 7/8 in (480 mm))	\$263
-----------	--	-------



Floor anchoring for cooking systems 20-half size, 20-full size


Included in delivery of cooking systems.

8700.0317	Sizes 20-half size, 20-full size	\$41
-----------	----------------------------------	------



RATIONAL USB data storage device

42.00.162	USB 3.0 stick for cooking programs and HACCP data	\$20
-----------	---	------




Accessory packages

See Special Accessories for descriptions.

60.72.107	Starter package, see Page [► 31]	\$466
60.72.108	Grill package, see Page [► 31]	\$672

Cooking and special accessories



Accessory packages

60.72.107	Starter package – Includes: 1 x grill and pizza tray 1/1 GN, 2 x roasting and baking trays 1/1 GN (non-perforated), 1 x granite-enameled container 1/1 GN 3/4 in (20 mm) deep, 1 x granite-enameled container 1/1 GN 2 3/8 in (60 mm) deep	\$466
60.72.108	Grill package – Includes: 2 x grill and pizza trays 1/1 GN, 2 x diamond and grill grates 1/1 GN	\$672




VarioSmoker

Smoker box with power supply, power supply holder, and connection cables. Connected to the iCombi Pro via USB port and controlled through its intelligent cooking paths. Manual operation in all iCombi Pro, iCombi Classic, SelfCookingCenter, CombiMaster Plus and CombiMaster units.

Electrical connection 120 V, 50/60 Hz, 165 W

60.75.367	VarioSmoker with NEMA 5-15P	\$621
-----------	-----------------------------	-------



Perforated baking trays

Highly heat-conductive baking trays with TriLax non-stick coating for perfect results at temperatures of up to 572°F (300°C).

60.74.147	2/3 GN (12 3/4" x 14")	\$49
6015.1103	1/1 GN (12 3/4" x 20 7/8")	\$65
6015.2103	2/1 GN (25 5/8" x 20 7/8")	\$87



Roasting and baking trays (non-perforated)

Highly heat-conductive baking trays with TriLax non-stick coating for perfect cooking and baking results at temperatures of up to 572°F (300°C).


60.73.671	2/3 GN (12 3/4" x 14")	\$49
6013.1103	1/1 GN (12 3/4" x 20 7/8")	\$65
6013.2103	2/1 GN (25 5/8" x 20 7/8")	\$87



Diamond and grill grate

The diamond and grill grate with TriLax non-stick coating yields classic single-stripe grill marks on one side; the other side produces an American steakhouse pattern.

60.73.802	1/2 GN (12 3/4" x 10 3/8")	\$124
60.73.801	2/3 GN (12 3/4" x 14")	\$145
60.73.314	1/1 GN (12 3/4" x 20 7/8")	\$190



Grilling and searing plate

Multifunctional grilling and searing plate with TriLax non-stick coating, ideal for diagonal grill patterns on pan-fried foods, fish, and vegetables. The peripheral lip on the back is helpful when roasting foods high in fat or liquid.

60.71.617	1/1 GN (12 3/4" x 20 7/8")	\$190
-----------	----------------------------	-------




Grill and pizza tray

Highly heat-conductive grill and pizza tray with TriLax non-stick coating. Ideal for cooking fresh or convenience pizzas, tartes, and flatbreads at temperatures of up to 572°F (300°C). The reverse side of the tray is suitable for grilling steaks, vegetables, or fish.

60.73.798	2/3 GN (12 3/4" x 14")	\$155
60.70.943	1/1 GN (12 3/4" x 20 7/8")	\$205

Cooking and special accessories




CombiGrill with loading aid

The CombiGrill with TriLax non-stick coating yields perfect grill marks on pan-fried foods, fish and vegetables. No preheating necessary.

The stainless steel loading aid facilitates grilling of large quantities of very thin products on the preheated CombiGrill.

6035.1017	CombiGrill 1/1 GN (12 3/4" x 20 7/8")	\$175
60.73.848	Loading grid for CombiGrill 12 x 24 1/3 in (325 x 618 mm) (for 1/1 GN (12 3/4" x 20 7/8"))	\$58



Roasting and baking pan

The corrugated underside ensures even browning and the TriLax nonstick coating prevents food from sticking. The carrier sheet allows safe and easily handling when loading large quantities.


60.73.286	Set of small baking and roasting pans (quantity: 4 including tray)	\$340
60.73.287	Set of large baking and roasting pans (quantity: 2 including tray)	\$243
60.73.271	Roasting and baking pan, small (ø 6 1/4 in (16 cm))	\$73
60.73.272	Roasting and baking pan, large (ø 9 7/8 in (25 cm))	\$98
60.73.212	1/1 GN tray for small baking and roasting pan	\$47
60.73.216	1/1 GN tray for large baking and roasting pan	\$47



Multibaker

The Multibaker with TriLax non-stick coating is suitable for preparing large quantities of fried eggs, omelets, hash browns, and tortilla, etc.


60.73.764	1/3 GN (12" x 7") 2 molds	\$62
60.73.646	2/3 GN (12 3/4" x 14") 5 molds	\$89
60.71.157	1/1 GN (12 3/4" x 20 7/8") 8 molds	\$125



CombiFry

For preparing large quantities of pre-fried products.

6019.1250	1/2 GN (12 3/4" x 10 3/8")	\$59
60.73.619	2/3 GN (12 3/4" x 14")	\$90
6019.1150	1/1 GN (12 3/4" x 20 7/8")	\$105



Chicken and duck superspike


Chickens and ducks are arranged vertically on the patented superspikes, creating particularly succulent breast meat combined with crispy and uniformly browned skin.

6035.1015	Capacity 4 pc., max. weight 2.9 lb (1,300 g), 1/2 GN (12 3/4" x 10 3/8")	\$58
6035.1016	Capacity 6 pc., max. weight 4 lb (1,800 g), 1/1 GN (12 3/4" x 20 7/8")	\$67
6035.1006	Capacity 8 pc., max. weight 2.9 lb (1,300 g), 1/1 GN (12 3/4" x 20 7/8")	\$70
6035.1010	Capacity 10 pc., max. weight 2 lb (950 g), 1/1 GN (12 3/4" x 20 7/8")	\$94
6035.1009	Capacity: Duck 8 pc., max. weight 4.9 lb (2,200g), 1/1 GN (12 3/4" x 20 7/8")	\$128



Chicken spit for horizontal chicken roasting for full-size models

60.73.334	Chicken spit 20 in (530 mm) long (two chicken per spit)	\$23
-----------	---	------




Rib rack

Ribs are arranged vertically on the rib rack, which means that they can be gently cooked to perfection – even overnight – while fully utilizing the available capacity.

6035.1018	1/1 GN (12 3/4" x 20 7/8")	\$137
-----------	----------------------------	-------


Cooking and special accessories



Potato baker

With unique potato baker by RATIONAL, you can prepare baked potatoes or corn on the cob up to 50% faster, without using aluminum foil.


6035.1019	1/1 GN (12 3/4" x 20 7/8")	\$137
-----------	----------------------------	-------



Grill and tandoori skewer

Stainless steel skewers and a matching frame, used to prepare pieces of meat or poultry, whole fish or fish fillets. Extremely robust, high-quality stainless steel. Dishwasher safe for easy cleaning.


60.75.782	Set 2/3 GN (12 3/4" x 14") (1 skewer frame and 5 different skewers)	\$118
60.72.414	Set 1/1 GN (12 3/4" x 20 7/8") (1 skewer frame and 5 different skewers)	\$172
60.74.963	Grill and tandoori skewer frame 2/3 GN (12 3/4" x 14")	\$63
60.72.224	Grill and tandoori skewer frame 1/1 GN (12 3/4" x 20 7/8")	\$77
60.75.783	5 skewers Ø 1/4 in (5 mm), 10 in (265 mm) long for 2/3 GN (12 3/4" x 14")	\$63
60.75.784	5 skewers □ 1/4 in (5 mm), 10 in (265 mm) long for 2/3 GN (12 3/4" x 14")	\$63
60.75.785	5 fish skewers 3/8 in (10 mm), 10 in (265 mm) long for 2/3 GN (12 3/4" x 14")	\$72
60.72.416	3 skewers Ø 1/4 in (5 mm), 20 in (530 mm) long for 1/1 GN (12 3/4" x 20 7/8")	\$58
60.72.417	3 skewers Ø 3/8 in (8 mm), 20 in (530 mm) long for 1/1 GN (12 3/4" x 20 7/8")	\$67
60.72.418	3 skewers □ 1/4 in (5 mm), 20 in (530 mm) long for 1/1 GN (12 3/4" x 20 7/8")	\$58
60.72.419	3 skewers □ 3/8 in (8 mm), 20 in (530 mm) long for 1/1 GN (12 3/4" x 20 7/8")	\$67
60.72.420	3 fish skewers 3/8 in (10 mm), 20 in (530 mm) long for 1/1 GN (12 3/4" x 20 7/8")	\$67



Muffin and timbale mold

Muffin and timbale molds are made of a highly flexible material. They are perfect for cooking vegetable quiches, fish timbales, bread pudding, poached eggs, a wide range of desserts, and more. Filling volume approx. 3.4 fl oz (100 ml).

6017.1002	11 3/4 x 15 3/4 in (300 x 400 mm) (for 1/1 GN (12 3/4" x 20 7/8"))	\$98
6017.1001	23 5/8 x 15 3/4 in (400 x 600 mm) (for 2/1 GN (25 5/8" x 20 7/8"))	\$188



Granite-enameled containers

Excellent heat conductivity ensures uniform browning. Fully formed corners so that all portions are equal in size. Especially suited to sheet cakes, pies, and pan pizzas.

6014.1202	1/2 GN (12 3/4" x 10 3/8"), 3/4 in (20 mm) deep	\$66
6014.1204	1/2 GN (12 3/4" x 10 3/8"), 1 1/2 in (40 mm) deep	\$73
6014.1206	1/2 GN (12 3/4" x 10 3/8"), 2 3/8 in (60 mm) deep	\$89
6014.2302	2/3 GN (12 3/4" x 14"), 3/4 in (20 mm) deep	\$79
6014.2304	2/3 GN (12 3/4" x 14"), 1 1/2 in (40 mm) deep	\$89
6014.2306	2/3 GN (12 3/4" x 14"), 2 3/8 in (60 mm) deep	\$110
6014.2310	2/3 GN (12 3/4" x 14"), 4 in (100 mm) deep	\$123
6014.1102	1/1 GN (12 3/4" x 20 7/8"), 3/4 in (20 mm) deep	\$89
6014.1104	1/1 GN (12 3/4" x 20 7/8"), 1 1/2 in (40 mm) deep	\$101
6014.1106	1/1 GN (12 3/4" x 20 7/8"), 2 3/8 in (60 mm) deep	\$124
6014.1110	1/1 GN (12 3/4" x 20 7/8"), 4 in (100 mm) deep	\$148
6014.2102	2/1 GN (25 5/8" x 20 7/8"), 3/4 in (20 mm) deep	\$131
6014.2104	2/1 GN (25 5/8" x 20 7/8"), 1 1/2 in (40 mm) deep	\$145
6014.2106	2/1 GN (25 5/8" x 20 7/8"), 2 3/8 in (60 mm) deep	\$178


Cooking and special accessories



Pizza pan

Pizza pan for mobile plate racks, for baking convenience pizzas in no time. Just load the pizza pans into the mobile plate rack and use Finishing to heat them through.

60.71.158	Pizzas up to 11 in (280 mm) in diameter	\$29
-----------	---	------

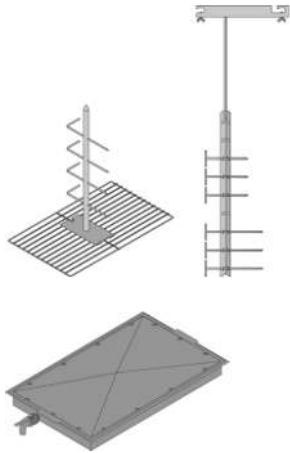

Lamb and suckling pig spit (1 lamb or 1 suckling pig)

For preparing whole lambs or suckling pigs. Just insert the skewer and attach it.

60.70.819	Sizes 10-half size, 10-full size, 20-half size, 20-full size to 26.5 lbs (12 kg) (1/1 GN (12 3/4" x 20 7/8"))	\$285
6035.1003	Size 20-half size to 66 lbs (30 kg) (1 spit with holder)	\$530
6035.1002	Size 20-full size to 66 lbs (30 kg) (1 spit with holder, optional second spit for lamb or suckling pig)	\$544
8710.1065	Optional spit	\$250

Fat collection container with drain lock (including cover and drain hose)


Ideal for catching fat when grilling and roasting. The fat collection container can be emptied easily and safely using the lockable drain valve and the drain hose.

8710.1135	1/1 GN (12 3/4" x 20 7/8")	\$420
60.70.776	2/1 GN (25 5/8" x 20 7/8")	\$637

Collection tray for cooking systems with factory-installed integrated fat drain option.

60.72.590	For hinging rack Size 6-half size, Size 10-half size	\$152
60.73.547	For mobile rack Size 6-half size, Size 10-half size	\$298
60.72.617	For hinging rack Size 6-full size, Size 10-full size	\$199
60.72.873	For mobile rack Size 6-full size, Size 10-full size	\$309

Gastronorm containers



Stainless steel grid


6010.2301	2/3 GN (12 3/4" x 14")	\$36
6010.1101	1/1 GN (12 3/4" x 20 7/8")	\$41
6010.2101	2/1 GN (25 5/8" x 20 7/8")	\$70



Containers, stainless steel

RATIONAL containers have walls up to 33 % thicker than standard containers. The extra-thick walls provide maximum stability and durability, even with large filling quantities. Prominent stacking collars allow space-saving stacking.

6013.2302	2/3 GN (12 3/4" x 14"), 3/4 in (20 mm) deep	\$32
6013.2306	2/3 GN (12 3/4" x 14"), 2 1/2 in (65 mm) deep	\$49
6013.1102	1/1 GN (12 3/4" x 20 7/8"), 3/4 in (20 mm) deep	\$38
6013.1104	1/1 GN (12 3/4" x 20 7/8"), 1 1/2 in (40 mm) deep	\$47
6013.1106	1/1 GN (12 3/4" x 20 7/8"), 2 1/2 in (65 mm) deep	\$56



Perforated container, stainless steel

6015.1165	1/1 GN (12 3/4" x 20 7/8"), 2 1/8 in (55 mm) deep	\$62
-----------	---	------

iCombi compatibility package

iCombi compatibility package

Allows usage of accessories designed for different generations of units.

Size 6-half size and 10-half size

Compatibility package consisting of iCombi run-in rail and transport trolley, ensures that iCombi mobile racks can be used with units manufactured 2004 or after.

60.61.745	Compatibility package incl. transport trolley, standard, Dimensions W D H: 21 1/2 35 3/4 38 7/8 in (548 911 990 mm) for table-top units	\$1,165
60.61.746	Compatibility package incl. transport trolley, height-adjustable, Dimensions W D H: 21 1/2 35 7/8 31 1/2-52 1/3 in (548 913 800-1330 mm) for table-top units	\$1,751

Size 6-full size and 10-full size

Compatibility package consisting of iCombi run-in rail and transport trolley, ensures that iCombi mobile racks can be used securely.

60.62.197	Compatibility package incl. transport trolley, standard, Dimensions W D H: 28 7/8 39 1/8 38 7/8 in (735 996 990 mm) for table-top units	\$1,531
-----------	--	---------

Size 20-half size

Compatibility package consisting of centering track, unit height extension, and iCombi mobile rack; allows use of iCombi mobile racks with units manufactured 2004 or after.

60.21.336	Compatibility package incl. mobile rack, standard, 20 racks (rail spacing 2 1/2 in (65 mm)) for floor units	\$2,478
60.21.337	Compatibility package incl. mobile rack, 15 racks (rail spacing 3 1/4 in (84 mm)) for floor units	\$2,478
60.21.338	Compatibility package incl. mobile rack, 16 racks (rail spacing 3 1/8 in (80 mm)) for floor units	\$2,478
60.21.340	Compatibility package incl. mobile plate rack Size 20-half size, 60 plates for floor units	\$2,698
60.21.341	Compatibility package incl. mobile plate rack Size 20-half size, 50 plates for floor units	\$2,698

Size 20-full size

Compatibility package consisting of centering track, unit height extension, and iCombi mobile rack; allows use of iCombi mobile racks with units manufactured 2004 or after.

60.22.498	Compatibility package incl. mobile rack, standard, 20 racks (rail spacing 2 1/2 in (65 mm)) for floor units	\$3,117
60.22.499	Compatibility package incl. mobile rack, 15 racks (rail spacing 3 1/4 in (84 mm)) for floor units	\$3,117
60.22.500	Compatibility package incl. mobile plate rack Size 20-full size, 84 plates for floor units	\$3,332
60.22.501	Compatibility package incl. mobile plate rack Size 20-full size, 100 plates for floor units	\$3,576
60.22.502	Compatibility package incl. mobile plate rack Size 20-full size, 120 plates for floor units	\$4,142

Adapter kit

For installation of a UltraVent or UltraVent Plus on a SelfCookingCenter or CombiMaster Plus.

SelfCookingCenter or CombiMaster Plus manufactured between 09/2011 and 05/2020

60.75.148	Adapter kit for Sizes 61 and 101, for individual electric units only	\$442
60.75.149	Adapter kit for Size 62, for individual electric units only	\$442
60.76.604	Adapter kit for Size 102, for individual electric units only	\$442

SelfCookingCenter or CombiMaster Plus models 04/2004 through 09/2011

60.76.837	Adapter kit for Sizes 61 and 101, for individual electric units only	\$570
-----------	--	-------

RATIONAL USB data storage device

USB 2.0 stick for cooking programs and HACCP data, for SelfCookingCenter and CombiMaster Plus

42.00.386	USB 2.0 stick	\$34
-----------	---------------	------

Combi-Duo universal compatibility packages

iCombi with SelfCookingCenter or CombiMaster Plus 2004 or after

Please select a Combi-Duo kit and the corresponding ventilation system for the lower unit.

				Upper cooking system - iCombi					Ventilation system - lower unit
				Electric			Gas		
		Lower unit		XS	6-half size	6-full size	6-half size	6-full size	
SelfCookingCenter or CombiMaster Plus models 09/2011 through 05/2020	Right-side hinge	Electric	XS	A	–	–	–	–	–
			61	P*	N	–	N	–	V*
			101	P*	N	–	N	–	V*
			62	Q*	Q*	O	Q*	O	V*
			102	Q*	–	O	–	O	V*
		Gas	61	P	P	–	P	–	T
			101	P	–	–	–	–	T
			62	Q	Q	Q	Q	Q	T
			102	Q	–	–	–	–	T
	Left-side hinge	Electric	XS	B	–	–	–	–	–
			61	R	R	–	R	–	V
			101	R	–	–	–	–	V
			62	S	S	S	S	S	V
			102	S	–	–	–	–	V
		Gas	61	R	R	–	R	–	T
			101	R	–	–	–	–	T
			62	S	S	S	S	S	T
			102	S	–	–	–	–	T
SelfCookingCenter or CombiMaster Plus models 04/2004 through 09/2011	Right-side hinge	Electric	61	P	P	–	P	–	W
			62	Q	Q	Q	Q	Q	W
		Gas	61	P	P	–	P	–	U
			62	Q	Q	Q	Q	Q	U
	Left-side hinge	Electric	61	R	R	–	R	–	W
			62	S	S	S	S	S	W
		Gas	61	R	R	–	R	–	U
			62	S	S	S	S	S	U
A	60.73.768	Combi-Duo Size XS on Size XS right-side hinge							\$730
B	60.74.276	Combi-Duo Size XS on Size XS left-side hinge							\$730
N	60.76.500	Combi-Duo, Size 6-half size electric/gas on Size 61 or 101 electric, right-side hinge - compatibility version							\$939
O	60.76.575	Combi-Duo, Size 6-full size electric/gas on Size 62 or 102 electric, right-side hinge - compatibility version							\$1,229
P	60.74.524	Combi-Duo Universal, Size XS or Size 6-half size electric/gas of 6-fulls size or Size 61 electric/gas, right-side hinge - compatibility version							\$1.164
Q	60.74.797	Combi-Duo Universal, Size XS or Size 6-half size electric/gas of 6-fulls size or Size 62 electric/gas, right-side hinge - compatibility version							\$1.522
R	60.74.930	Combi-Duo Universal, Size XS or 6-half size electric/gas on Size 61 electric/gas, left-side hinge - compatibility version							\$1.164
S	60.74.953	Combi-Duo Universal, Size XS or Size 6-half size electric/gas on Size 62 electric/gas, left-side hinge - compatibility version							\$1.522
T	60.76.756	Exhaust gas box Size 61, 101, 62, 102, Gas models dated 09/2011 to 05/2020							\$207
U	60.76.757	Exhaust gas box Size 61, 101, 62, 102, Gas models dated 04/2004 to 09/2011							\$242
V	60.76.733	Ventilation pipe Size 61, 101, 62, 102, Electric models dated 09/2011 to 05/2020							\$147
W	60.76.735	Ventilation pipe Size 61, 101, 62, 102, Electric models dated 04/2004 to 09/2011							\$164

* Electric V ventilation pipes are only necessary with Combi-Duo kits P and Q.

Combi-Duo universal compatibility packages

Adapter kit for Combi-Duo recirculating hood

For installing a Combi-Duo when one or two models are a SelfCookingCenter (for all units from SelfCookingCenter whiteefficiency, manufactured 09/2011 or after) or CombiMaster Plus.

60.76.659	Size 61, 101, 62 and 102 electric	\$442
-----------	-----------------------------------	-------

Base variations for combining an iCombi with a SelfCookingCenter or a CombiMaster Plus

Please choose one of the following options if configuring a new Combi-Duo setup.

The lower unit is a SelfCookingCenter or CombiMaster Plus Size 61 or Size 101

60.60.349	With feet	\$587
60.60.968	Mobile with casters	\$901
60.31.649	Stand 1 for Combi-Duo Size 61 on Size 61	\$654

The lower unit is a SelfCookingCenter or CombiMaster Plus Size 62 or Size 102

60.60.392	With feet	\$790
60.60.513	Mobile with casters	\$1,214
60.31.650	Stand 1 for Combi-Duo Size 62 on Size 62	\$763

Installation Kits

Installation Kits

The RATIONAL Installation Kits ensure that the installer has all of the essential connection materials at hand on the time of the installation. It is a hassle-free one-stop shop versus buying parts at various suppliers or stores.

Please contact us at 888-320-7274 for additional information.

87.01.401US	Electric XS (208/60/3ph & 240/60/3ph) High Temp CPVC Scheduled 80 Drain	\$253
87.01.402US	Electric XS (208/60/3ph & 240/60/3ph) Copper Drain	\$232
87.01.403US	Electric XS (208/60/1ph & 240/60/1ph) High Temp CPVC Scheduled 80 Drain	\$253
87.01.404US	Electric XS (208/60/1ph & 240/60/1ph) Copper Drain	\$242
8720.1551US	Electric 10-full size (440/60/3ph & 480/60/3ph) Electric 20-half size (440/60/3ph & 480/60/3ph) Electric 6-half size (208/60/1ph & 240/60/1ph) Electric 10-half size (208/60/3ph & 240/60/3ph)	\$485
8720.1552US	Electric 6-half size (208/60/3ph & 240/60/3ph) Electric 10-half size (440/60/3ph & 480/60/3ph) Electric 6-full size (440/60/3ph & 480/60/3ph)	\$388
8720.1553US	Electric 6-half size (440/60/3ph & 480/60/3ph)	\$362
8720.1554US	Electric 10-full size (208/60/3ph & 240/60/3ph) Electric 20-full size (440/60/3ph)	\$514
8720.1559US	Electric 20-half size (208/60/3ph & 240/60/3ph)	\$543
8720.1560US	Gas 6-half size (120/60/1ph & 208/60/1ph) Gas 10-half size (120/60/1ph & 208/60/1ph) Gas 6-full size (208-240/60/1ph)	\$572
8720.1561US	Gas 10-full size (208-240/60/1ph) Gas 20-half size (120/60/1ph & 208/60/1ph) Gas 20-full size (208-240/60/1ph)	\$648
8720.1563US	Electric 6-full size (208/60/3ph & 240/60/3ph) Electric 20-full size (480/60/3ph)	\$492
8720.1564US	Electric 20-full size (240/60/3ph)	\$672
8720.1569US	Electric 20-full size (208/60/3ph)	\$672

Water Filtration System (includes filter installation kit)

1900.1154US	Single Cartridge For any single iCombi or iVario or Combi-Duo Size XS or half-size. 24h	\$550
1900.1150US	Double Cartridge For full size Combi-Duos or if used for more than 2 units. For each additional cooking systems add 1 head and cartridge. 24h	\$1,530
1900.1152US	Water Filtration Modular Head for adding on additional Cartridge to Double Cartridge System (Maximum 4 cartridges).	\$230
1900.1155US	Water Filtration Cartridge (replacement and add on).	\$360

Voltage Options

Voltage Options

The specific voltage and phase option must be specified for each unit ordered.

Three Phase 60 Hz					Single Phase 60 Hz		
(208 V is field retrofittable to 240 V, 480 V is field retrofittable to 440 V)					2AC	2AC	1NAC
iCombi Pro	208 V	*240 V	*440 V	480 V	+208 V	+240 V	120 V
XS Electric	X	X			X	X	
6-half size Electric	X	X	X	X	X	*X	
6-full size Electric	X	X	X	X	X		
10-half size Electric	X	X	X	*X	X		
10-full size Electric	X	X	X	X	X		
20-half size Electric	X	X	X	*X	X		
20-full size Electric	X	X	X	X	X		
CombiMaster Plus							
XS Electric	X	X			X	X	
iCombi Classic							
6-half size Electric	X	X	X	*X	*X	*X	
6-full size Electric	X	X	X	*X			
10-half size Electric	X	X	X	*X			
10-full size Electric	X	X	X	*X			
20-half size Electric	X	X	X	*X			
20-full size Electric	X	X	X	*X			
iCombi Pro							
6-half size Gas					X	X	X
6-full size Gas					X	X	
10-half size Gas					X	X	X
10-full size Gas					X	X	
20-half size Gas					*X	*X	*X
20-full size Gas					X	X	
iCombi Classic							
6-half size Gas							X
6-full size Gas					X	X	
10-half size Gas					X	X	X
10-full size Gas					X	X	
20-half size Gas					*X	*X	*X
20-full size Gas					X	X	

Optional non-USA standard voltages - quotation upon request.

+ 1phase 208V 60Hz 3wire (L1, L2, Ground) or 1phase 240V, 60Hz 3wire (L1, L2, Ground)

Note:

Gas 6-half size, 10-half size, 20-half size – 1 NAC 120 V come equipped with 8' cord

Gas 6-half size, 10-half size, 20-half size - 2 AC 208/240 V come equipped with 8' cord

Gas 6-full size, 10-full size, 20-full size – 2 AC 208/240 V come equipped with 8' cord

XS 2 AC 208/240 V come equipped with cord and 6-50 plug. 3 AC 208/240 V come equipped with cord and 15-30 plug

Note: Electric and Gas 208 V units are field retrofittable to 240 V; Electric 480 V units are field retrofittable to 440 V

*= special order items

Certification marks for iCombi

The following certification seals confirm that our cooking systems meet defined standards and guidelines set forth by independent testing and certification bodies. So that you will know at first glance that our systems meet national and international safety standards, that we prioritize exceptional product quality, and that we demonstrably maintain that quality. Additional information is available at rational-online.com.



CE conformity defines the major safety requirements on products marketed within Europe.



ENERGY STAR is a voluntary, international certification program. It certifies particularly energy-efficient products based on utility saving criteria set forth by the EPA and the US Department of Energy.



KIWA focuses on the European market, and on testing, inspecting, and certifying equipment in the electrical, gas, and water segments. Equipment is also inspected according to defined quality and safety standards.



The NSF-HCV certifies the hygienic safety of food preparation equipment used in Europe.



CSA is a North American certification signifying complete fulfillment of all legally relevant specifications regarding gas approval for bringing new appliances into the market.



The NSF guarantees international adherence to NSF/ANSI hygiene standards when new appliances are brought onto the market.



UL evaluates and certifies the safety of electrical products that are marketed in North America.



QA is a quality certification for gas appliances in the Netherlands; it certifies that appliances meet the specified requirements on quality, functionality, and safety.



This certificate sets forth quality, safety, and usage requirements on gas and water appliances brought onto the Swiss market.



The EAC defines the most important Eurasian quality and safety requirements on appliances.



Electrical and electronic appliances intended for the Japanese market must meet the requirements set forth in PSE safety standards.



JIA signifies fulfillment of specific drinking water protection requirements for the Japanese market.



The JIA is an inspection association that tests and certifies gas appliances for the Japanese market.



The KTL is for the Korean market; it confirms that electrical appliances meet product safety requirements.



KGS certifies that basic requirements for gas appliance approval have been met in accordance with Korean standards.



Watermark certifies appliances for the Australian market, ensuring that they are suitable and appropriately approved for their intended use.



AGA applies to the Australian market; it verifies that gas appliances fulfill Australian gas safety standards.



INMETRO is relevant to all electrical appliances or components with connected loads under 20 kW in Brazil.



IRAM specifies approval requirements for the Argentinian market, focusing on electronics, gas, mechanics, hygiene, safety, and food.



The DNV GL is an international classification society that certifies marine versions of appliances.

Functions

	iCombi Pro			Combi Master Plus	iCombi Classic	
Functions	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size
iCookingSuite with Poultry, Meat, Fish, Egg Dishes, Sides, Baked Goods, and Finishing cooking modes, as well as Boil, Roast, Bake, and Grill cooking processes; desired results can be specified easily, and the ideal cooking and baking paths are adjusted automatically.	●	●	●	—	—	—
Country-specific cooking parameter presets, independent of language settings. Application examples with presets for other countries can also be selected.	●	●	●	—	—	—
Cockpit: Displays cooking steps within current intelligent cooking path. Current cooking step marked.	●	●	●	—	—	—
Messenger - provides information on current automatic adjustments to cooking and baking process, displays action prompts as pop-up windows	●	●	●	—	—	—
Automatic Cool-Down function for intelligent climate establishment with water spraying (optionally selectable) for quicker cooling	●	●	●	—	—	—
Manually selectable cooling function for quick, safe cooking cabinet cool-down	●	●	●	●	●	●
Users can actively modify cooking parameters at any time while intelligent cooking paths are in progress	●	●	●	—	—	—
Possible to change from intelligent cooking paths to iProductionManager or manual cooking. Users can switch between manual cooking and iProductionManager	●	●	●	—	—	—
iProductionManager – intelligent, flexible organization of the entire production process. Displays which products can be prepared together; individually monitors each rack – even on mixed loads. Notifications when each dish needs to be put in or taken out. Tickets can be placed for current time or in the future; automatically arranged optimized for shortest cooking time or lowest energy consumption. Alternatively: Tickets can be arranged such that food is finished at a selected target time	●	●	●	—	—	—
Level indication iProductionManager – Signals which tray needs to be loaded or unloaded iCookingSuite or manual mode – uses LED lighting to signal cooking path steps such as end of preheating, end of cooking path, or action prompts	—	●	—	—	—	—
Intelligent preheating and load management - product-dependent, immediate loading with no waiting time, with great results	●	●	●	—	—	—
iDensityControl - intelligent climate management always establishes the right cooking cabinet climate using intelligent thermocouples, high-performance heating system, fresh steam generator, and active dehumidification. Intelligent air circulation always directs energy wherever it is needed.	●	●	●	—	—	—
ClimaPlus – accurate humidity measurement; 10 setting and regulation levels (CombiMaster Plus XS: 5 levels)	—	—	—	●	●	●
Highly effective active cooking cabinet dehumidification - up to 28 gal (105 l) per second, ensuring exceptional cooking results	●	●	●	●	●	●
Combi-steamer with the following modes: Steam 85°F–265°F (30°C–130°C), Convection 85°F–572°F (30°C–300°C), Combination of steam and convection 85°F–572°F (30°C–300°C)	●	●	●	●	●	●
Automatic intelligent Finishing for plated banquets, buffet, - á la carte, etc.	●	●	●	—	—	—
Finishing programs for plated banquets and containers	—	—	—	—	●	●
Low-temperature cooking (including overnight)	●	●	●	—	—	—
Delta-T cooking for gentle cooking of large meat cuts, including overnight	●	●	●	—	●	●

Operation

Operation	iCombi Pro			Combi Master Plus	iCombi Classic	
	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size
Top 10 favorites list of selected iCookingSuite cooking paths and manual programs, easy to find under the Favorites star on the home screen	●	●	●	—	—	—
Comprehensive settings options allow customization to fit application usage / individual user behavior	●	●	●	—	—	—
Create user-specific MyDisplay profiles for individual unit and control configurations, e.g. custom home screens	●	●	●	—	—	—
Individually configurable, user-specific operating display (images, text, etc.)	●	●	●	—	—	—
Adjustable display contrast and ringtones	●	●	●	—	—	—
Comprehensive settings options, such as energy, language, network, and system settings	●	●	●	—	—	—
10.1" TFT color display with capacitive glass touchscreen and self-explanatory symbols, allowing easy, intuitive operation and controls using drag and swipe motions	●	●	●	—	—	—
Selection dial with "Push" function to adjust settings and confirm input. Users can also scroll through lists and press to select cooking paths	●	●	●	—	●	●
4.3" color display with self-explanatory symbols and softkeys for easy operation	—	—	—	—	●	●
Operating and program lock (3-stage), adjustable for each user	●	●	●	—	—	—
Program lock	—	—	—	●	—	—
Digital user manual, including practical tips and comprehensive application examples which can be started directly from the manual as cooking paths	●	●	●	—	—	—
Ergonomic operation of an additional iCombi Pro via the display of a different iCombi Pro e.g. on a Combi-Duo	●	●	●	—	—	—
Remote access and monitoring of cooking systems via PC, smartphone, or tablet through ConnectedCooking	●	●	●	—	—	—
Monitoring of cooking systems via PC, smartphone, or tablet through ConnectedCooking	—	—	—	—	○	○
User guidance available in over 55 languages	●	●	●	—	—	—
User guidance with the help of clear symbols	●	●	●	—	●	●
Control knob for cooking modes and temperature, core temperature, or time settings.	—	—	—	●	—	—

Care and operational safety

	iCombi Pro			Combi Master Plus	iCombi Classic	
Cleaning, care, and operational safety	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size
iCareSystem - intelligent cleaning and descaling system that detects how much cleaning is needed and recommends an ideal cleaning level and quantity of chemicals	●	●	●	—	—	—
Ultra-fast interim cleaning in 12 minutes (iCombi Pro XS: <30 minutes)	●	●	●	—	—	—
Light, medium, and heavy cleaning in either Normal or resource-saving Eco mode	●	●	●	—	—	—
Rinse with or without tabs	●	●	●	—	—	—
Automatic descaling - no water softening system necessary, no need to descale steam generator manually	●	●	●	—	●	●
Automatic cleaning request based on usage	●	●	●	—	—	—
Displays current cleaning step and remaining cleaning time	●	●	●	—	—	—
Weekly cleaning plan - manually create weekly plan for cleaning cooking systems	●	●	●	—	—	—
Control and monitor cleaning via PC, smartphone or tablet using ConnectedCooking	●	●	●	—	—	—
Automatic cleaning with Care system - cleaning and care system for cooking cabinet and steam generator	—	—	—	—	●	●
4 automatic cleaning programs - light, medium, or heavy cleaning, rinse without tabs	—	—	—	—	●	●
Displays the number of Active Green cleaner tabs and care tabs for each cleaning program	●	●	●	—	●	●
Displays selected cleaning program and remaining cleaning time	—	—	—	●	●	●
Solid cleaning and care products for maximum user safety	●	●	●	●	●	●
Integrated, ergonomic hand shower with automatic retraction mechanism, two spray modes (shower spray and jet spray) and integrated water shut-off function	—	●	●	—	●	●
Integral hand shower with automatic retracting system, integral water shut-off function, and infinitely variable jet strength	●	—	—	●	—	—
Displays descaling prompt	—	—	—	●	—	—
Menu-guided descaling program	—	—	—	●	—	—
ServiceDiagnostic System (SDS) with automatic service notices display	●	●	●	●	●	●

Features

	iCombi Pro			Combi Master Plus	iCombi Classic	
Features	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size
Core temperature probe with 6-point measurement	●	●	●	—	—	—
Core temperature probe with 1-point measurement	—	—	—	●	●	●
Users can customize limits on minimum and maximum selectable core temperature in system settings	●	●	●	—	—	—
Positioning aid for core temperature probe	□	□	□	□	□	□
External USB core temperature probe	—	□	□	—	□	□
External sous-vide USB core temperature probe for vacuum cooking	—	□	□	—	□	□
1,200 programs with up to 12 steps can be created and named as needed	●	●	●	—	—	—
100 programs with up to 12 steps can be created and named as needed	—	—	—	—	●	●
100 programs with up to 6 steps can be selected as required	—	—	—	●	—	—
Manual steam burst	●	●	●	—	—	—
4 levels of precise steam injection can be programmed manually at 85°F–500°F (30°C–260°C) in convection or combination modes	●	●	●	—	—	—
5 air speeds, programmable	●	●	●	●	●	●
Intelligent cooking paths with automatic load detection	●	●	●	—	—	—
Temperature unit can be set in °F or °C	●	●	●	●	●	●
Digital temperature display	●	●	●	●	●	●
Actual and control value display	●	●	●	●	●	●
Digital timer, 0–24 hours with permanent setting	●	●	●	●	●	●
24 hour real-time clock	●	●	●	—	●	●
Time setting in hours/minutes or minutes/seconds	●	●	●	—	—	—
Time setting in hours/minutes	—	—	—	●	●	●
Automatic pre-selected starting time with variable date and time	●	●	●	—	—	—
1/2 energy setting option (electric models only) (available beginning Q2/2021)	●	●	●	—	—	—
High-performance fresh steam generator with automatic water refill	●	●	●	●	●	●
Whisper-quiet, high-performance blower-burner system (gas models only)	—	●	●	—	●	●
Automatic vapor quenching system	●	●	●	●	●	●
Dynamic air circulation with reversible high-performance fan wheels (6 racks: 1 fan wheel; 10 racks: 2 fans; 20 racks: 3 fans)	●	●	●	●	●	●
Automatic calibration and adaptation to the installation location (elevation) including self-test	●	●	●	●	●	●
Automatic adaptation to geographic elevation for optimum results in Steam mode	●	●	●	●	●	●
Demand-responsive energy supply	●	●	●	●	●	●
Removable air baffle	●	●	●	●	●	●
Integral fan impeller brake for maximum operating safety and quick direction changes	●	●	●	●	●	●
Centrifugal fat extraction system with no additional fat filter	●	●	●	●	●	●
3-pane glass cooking cabinet door with rear ventilation, special heat-reflective coating and swiveling inner glass panes for easy cleaning	●	●	●	●	—	—

Features

	iCombi Pro			Combi Master Plus	iCombi Classic	
Features	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size
2-pane cooking cabinet door with rear ventilation, special heat-reflective coating and swiveling inner glass pane for easy cleaning	—	—	—	—	●	●
Door lock positions at 110°/180° (table-top units), 120°/180° (floor units) for maximum operating safety	●	●	●	●	●	●
Proximity door contact switch	●	●	●	●	●	●
Monitoring of door opening times when loading and during cooking with an alarm function	●	●	●	—	—	—
RATIONAL hood can be set to run for any length of time after cooking	●	●	—	—	—	—
Press-fit, easy-change door seal	●	●	●	●	●	●
Run-in guides for mobile oven rack	—	—	●	—	—	●
Lengthwise loading, Size XS suitable for 1/2, 1/3, 2/3 GN containers, minimizes energy loss and requires little space when opening and swiveling the door	●	—	—	●	—	—
Lengthwise loading, Size 6-half size, 10-half size, 20-half size suitable for 1/1, 1/2, 1/3, 2/3 GN containers, minimizes energy loss and requires little space when opening and swiveling the door	—	●	●	—	●	●
Lengthwise loading, Size 6-full size, 10-full size, 20-full size suitable for 2/1, 1/1, 2/4 GN containers, minimizes energy loss and requires little space when opening and swiveling the door	—	●	●	—	●	●
Seamless, pan-shaped hygienic cooking cabinet with rounded corners, splash guard	●	●	●	●	●	●
LED cooking cabinet and rack lighting	●	●	●	●	●	●
Removable hinging racks with extra support rails for fat drip container	—	●	—	—	●	—
Swiveling, removable hinging racks	●	—	—	●	—	—
U-shaped rack rails with notched recesses for easy loading	—	●	●	—	●	●
L-shaped rack rails	—	○	—	—	○	—
Mobile rack package	—	○	—	—	○	—
Mobile rack package for Combi-Duo	—	○	—	—	○	—
Mobile rack with locks on both sides, drip tray with drain, tandem casters (2 with locking brakes), wheel diameter 5 in (125 mm), stainless steel metal parts	—	—	●	—	—	●
Cooking cabinet door with integrated, optimized sealing mechanism - no steam can escape during operation without a mobile rack	—	—	●	—	—	●
Material inside and out DIN 1.4301/ASTM 304 stainless steel	●	●	●	●	●	●
USB port for downloading HACCP data / service information or transferring cooking programs using the RATIONAL USB stick, and to facilitate software updates	●	●	●	●	●	●
Upload shopping carts, upload images to customize home screen via USB port	●	●	●	—	—	—
Status and warning displays, e.g. for low water level	●	●	●	●	●	●



Setup and test certificates

	iCombi Pro			Combi Master Plus	iCombi Classic	
Connection, setup, and test certificates	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size
Wi-Fi interface to use with ConnectedCooking, RATIONAL's modern cloud-based networking solution	●	●	●	—	○	○
Ethernet interface for connecting to ConnectedCooking	●	●	●	○	○	○
Declaration of conformity: CE	●	●	●	●	●	●
Electrical safety: Kiwa, UL, CUL, IRAM, EAC, EMC, PSE, KTL, INMETRO	●	●	●	●	●	●
Energy efficiency: ENERGY STAR	—	●	●	—	—	—
Gas safety: Gastec QA, AGA, CSA, SVGW, JIA, EAC, KGS, SABS, SVCOO	—	●	●	—	●	●
Unit/operating safety: Tested in accordance with the Machinery Directive 2006/42/EC	●	●	●	●	●	●
General hygiene: NSF, HCV-EU	●	●	●	●	●	●
Kosher certification for cooking systems and cleaners	●	●	●	●	●	●
Drinking water protection: SVGW, KIWA, EN1717, JET, Watermark	●	●	●	●	●	●
Germanischer Lloyd DNV GL	●	●	●	●	●	●
Food-safe accessory pursuant to Directive 1935/2004/EC	●	●	●	●	●	●
Fixed waste water connection pursuant to SVGW EN1717	●	●	●	●	●	●
Class IPX 5 protection against splashing and spraying water	●	●	●	●	●	●
Height-adjustable unit feet	—	—	●	—	—	●
Unit plinth with peripheral seal	●	●	—	●	●	—
Can be installed on 27 1/2 in (700 mm) deep work surface (6-half size and 10-half size)	●	●	—	●	●	—
Can be installed on 23 1/2 in (600 mm) deep work surface	●	—	—	●	—	—
Wall bracket (XS and 6-half size)	●	●	—	●	●	—
Floor locking	—	—	●	—	—	●
Special voltages on request	○	○	○	○	○	○
LPG or natural gas	—	●	●	—	●	●

Work safety and ergonomic features

	iCombi Pro			Combi Master Plus	iCombi Classic	
Hygiene, work safety, and ergonomic design	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size	XS	6-half size 10-half size 6-full size 10-full size	20-half size 20-full size
Safety temperature limiter for steam generator and convection heat	●	●	●	●	●	●
Tested according to national and international standards for unsupervised operation	●	●	●	●	●	●
Left-side hinge for cooking cabinet door	○	○	–	○	○	–
Door handle for ergonomic one-handed operation with swing-shut function and right/left-hand function	●	●	–	●	●	–
Door handle for ergonomic one-handed operation with swing-shut function and lock	–	–	●	–	–	●
Maximum rack height 5.25 ft (1.60 m) (on tabletop units atop matching original RATIONAL base cabinet)	●	●	○	●	●	○
Combi-Duo kit – stackable cooking systems (with maximum rack height of 5.25 ft (1.60 m) depending on installation variant)	□	□	–	□	□	–
Safety door lock	○	○	○	○	○	○
Integrated fat drain	–	○	○	–	○	○
SecurityLine (SecurityLine version)	–	○	○	–	○	○
Lockable control panel	–	○	○	–	○	○
Flip-up control panel protection	–	○	○	–	○	○
MarineLine (Marine version)	○	○	○	○	○	○
HeavyDutyLine	–	○	○	–	○	○
MobilityLine – Mobile floor units with casters	–	–	□	–	–	□
MobilityLine – Mobile tabletop units atop reinforced stands	–	□	–	–	□	–

iVario overview

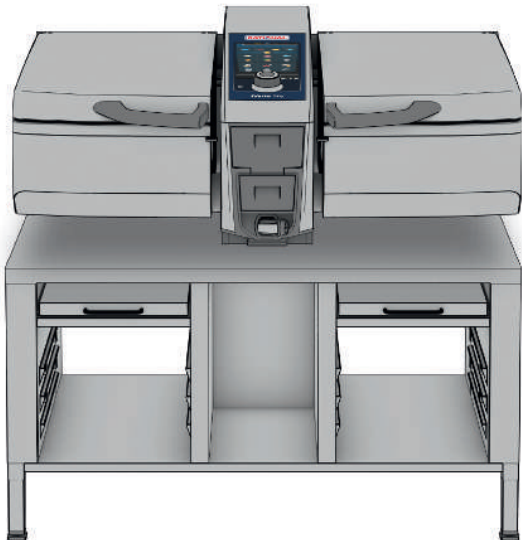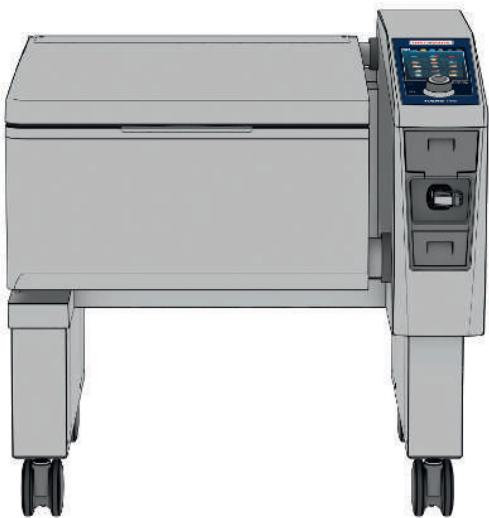



	iVario 2-XS
Price	\$17,010*
Item number 3 AC 208/240V	WZ9ENRA.0002212
Connected load	15 kW
Item number 3 AC 440/480V	WZ9ENRA.0005614
Connected load	15 kW
Capacity	195 5/8"² (2 x 13 dm²), 4.5 gal (2 x 17 L)
Meals per service	30 and up
Width	43 1/4 in (1100 mm)
Depth	29 3/4 in (756 mm)
Height	17 1/4 in (485 mm)

Basic units and setup variations

Stand with feet	\$2,286
Stand with stainless steel feet	\$2,379
Stand with casters	\$2,672
Stand with electric height adjustable feet	\$3,930
Unit with no legs/feet	–
Unit with plastic feet	–
Unit with stainless steel feet	–
Unit with casters	–
Unit with electric height adjustable feet	–
Rear panel for base	–
Storage cabinet for base	–

Options

Pressure cooking (available 2021)	–
iZoneControl	\$1,390
Low temperature cooking	\$1,090
Ethernet interface	•


Accessories

Corresponding accessories can be found here:	Page [► 55]
--	-------------

More information on installation variations, options, combinations of options, and special voltages available on request.

*The price of the cooking system includes a basic accessories package valued at \$873 (details are available on Page [► 55]).

**Cooking system with base with plastic feet option.

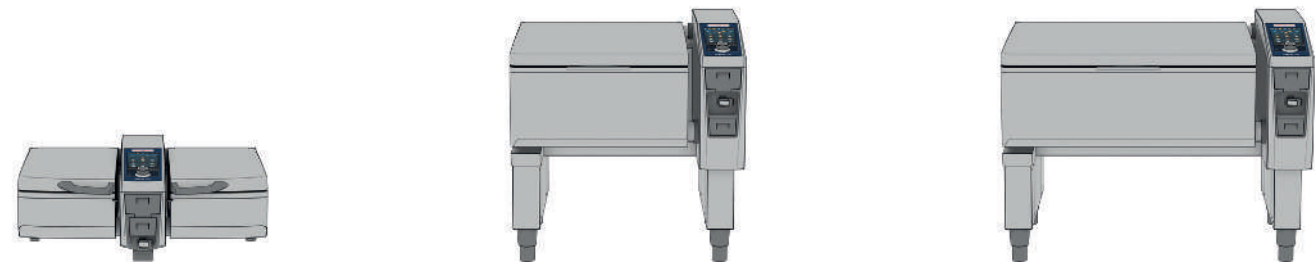

iVario Pro 2-S	iVario Pro L	iVario Pro XL
\$24,790	\$28,190**	\$36,870**
WY9ENRA.0002213	WX9ENRA.0002215	WW9ENRA.0002217
23 kW	23 kW	34 kW
WY9ENRA.0005616	WX9ENRA.0005619	WW9ENRA.0005622
22 kW	29 kW	44 kW
292 1/4"² (2 x 19 dm²), 6.5 gal (2 x 25 L)	611 3/8"² (39 dm²), 26 gal (100 L)	906 1/2"² (59 dm²), 40 gal (150 L)
50–100	100–300	100–500
43 1/4 in (1100 mm)	40 1/2 in (1030 mm)	53 3/4 in (1365 mm)
36 7/8 in (938 mm)	35 1/4 in (894 mm)	35 1/4 in (894 mm)
17 1/4 in (485 mm)	23 7/8 in (1078 mm)**	23 7/8 in (1078 mm)**

\$2,904	–	–
\$2,996	–	–
\$3,290	–	–
\$4,550	–	–

–	\$27,130	\$35,810
–	\$28,190	\$36,870
–	\$28,570	\$37,250
–	\$28,800	\$37,480
–	\$31,750	\$40,430
–	\$540	\$620
–	\$1,430	\$1,840

Options

\$3,840	\$4,610	\$5,260
•	•	•
•	•	•
•	•	•

Accessories

Page [► 57]	Page [► 59]	Page [► 59]
-------------	-------------	-------------

iVario options

Pressure cooking (available 2021)

The pressure cooking option enables faster and yet still gentle cooking of a wide range of different dishes. Uniform, optimal pressure levels are guaranteed, which preserves the cellular structure of the food. This is a reliable and low maintenance system.

Maximum pressure: 4.35 PSI (300 mbar).

iVario 2-XS	iVario Pro 2-S	iVario Pro L	iVario Pro XL
–	\$3,840	\$4,610	\$5,260

iZoneControl

Flexible division of the pan base into zones using different temperatures.

iVario 2-XS	iVario Pro 2-S	iVario Pro L	iVario Pro XL
\$1,390	•	•	•

Low temperature cooking

Use of intelligent cooking paths for low-temperature cooking, confit, and sous-vide cooking.

iVario 2-XS	iVario Pro 2-S	iVario Pro L	iVario Pro XL
\$1,090	•	•	•

Lockable deep-fry mode

The “Deep Fry” cooking mode can be turned off. This option can be used if deep frying is specifically not wanted. It can be switched on again at a later time.

iVario 2-XS	iVario Pro 2-S	iVario Pro L	iVario Pro XL
No additional charge	No additional charge	No additional charge	No additional charge

WiFi module

The integrated WiFi module can be used to connect the cooking system into an existing WiFi network, e.g. for purposes of connecting to ConnectedCooking.

iVario 2-XS	iVario Pro 2-S	iVario Pro L	iVario Pro XL
\$450	•	•	•

SOLAS (Safety of Lives on Sea) signal output (available beginning 11/2020)

The cooking system has an additional safety temperature limiter and can be connected to an external signaling device 230 V (max. 8 A, not included with the unit). Corresponding connection terminals will be pre-assembled if this option is selected.

iVario 2-XS	iVario Pro 2-S	iVario Pro L	iVario Pro XL
\$270	\$270	\$270	\$270

Lockable control panel


The lockable control panel protects the unit against unauthorized usage.

iVario 2-XS	iVario Pro 2-S	iVario Pro L	iVario Pro XL
\$850	\$850	\$850	\$850

• Standard | ◦ Optional | – Not available

Setup variations - iVario 2-XS and iVario Pro 2-S


The iVario can be integrated perfectly into almost any kitchen. Its modular concept permits a wide range of installation and set-up options, depending on what your customers need.



Stand with electric height adjustable feet

Setting range: + 6 7/8 in (175 mm) / - 1 in (25 mm) compared to standard height. 2 pull out shelves, 6 pairs of 1/1 GN (12 3/4" x 20 7/8") supporting rails. Side walls and top closed. No separate electrical connection required; controlled via the iVario display. Flexible drain hose included.


60.31.326	Size 2-XS	\$3,930
60.31.327	Size 2-S	\$4,550



Stand with feet

2 pull out shelves, 6 pairs of 1/1 GN (12 3/4" x 20 7/8") supporting rails. Side panels and top closed, rear panel open. 4 adjustable feet.


60.31.221	Size 2-XS	\$2,286
60.31.319	Size 2-S	\$2,904



Stand with stainless steel feet

2 pull out shelves, 6 pairs of 1/1 GN (12 3/4" x 20 7/8") supporting rails. Side panels and top closed, rear panel open. 4 stainless-steel feet prepared for secure anchoring (not height-adjustable).

60.31.538	Size 2-XS	\$2,379
60.31.539	Size 2-S	\$2,996




Stand with casters

2 pull out shelves, 6 pairs of 1/1 GN (12 3/4" x 20 7/8") supporting rails. Side panels and top closed, rear panel open. 4 swivel casters, of which 2 are lockable, diameter 5 in (125 mm) (not adjustable).

60.31.317	Size 2-XS	\$2,672
60.31.320	Size 2-S	\$3,290

Setup variations - iVario Pro L and iVario Pro XL


The iVario can be integrated perfectly into almost any kitchen. Its modular concept permits a wide range of installation and set-up options, depending on what your customers need.



Unit with electrically powered, height-adjustable feet

Assembly with a base and electrically powered, height-adjustable feet, for installation as floor unit.


Option	Size L	\$31,750
Option	Size XL	\$40,430



Unit with plastic feet

Assembly with a base and 5 7/8 in (150 mm) tall plastic feet, for installation as floor unit.


Option	Size L	•
Option	Size XL	•



Unit with stainless-steel feet

Assembly with a base and 5 7/8 in (150 mm) tall, securable stainless steel feet, for installation as floor unit.


Option	Size L	\$28,570
Option	Size XL	\$37,250



Unit with casters

Assembly with a base and 4 casters (assembly required), for installation as a mobile floor unit. 4 casters ø 5 in (125 mm), 2 lockable Effective height: 5 7/8 in (150 mm). Cannot be combined with pressure cooking option.

Option	Size L	\$28,800
Option	Size XL	\$37,480



Cladding for unit

The back wall cladding closes the area between the side sections, thereby covering the connections. Can be combined with all base variations and storage cabinet.

Option	Size L	\$540
Option	Size XL	\$620



Storage cabinet for base

Storage cabinet in the base provides support rails for storing GN containers and accessories. Can be combined with all base variations.

Option	Size L	\$29,620
Option	Size XL	\$38,710

Accessories Size 2-XS

Standard accessories Size 2-XS (included in the price of iVario 2-XS)

Consists of:

2 x 60.74.791 – Arm for automatic raising/lowering Size 2-XS	1 x 60.74.970 – Boiling basket Size 2-XS
1 x 60.75.019 – Frying basket Size 2-XS	1 x 60.74.666 – Strainer Size 2-XS
1 x 60.73.927 – Cleaning scrub	



Spatula

Stainless steel, ergonomic tool for turning and removing products in the iVario.

60.71.643	Size 2-XS, 2-S, L, XL	\$79
-----------	-----------------------	------



Automatic lifting and lowering arm

For boiling and frying baskets used with AutoLift.

60.74.791	Size 2-XS	\$92
-----------	-----------	------



Boiling basket

For boiling in baskets used with AutoLift. Requires the with arm for automatic raising/lowering.

60.74.970	Size 2-XS	\$277
-----------	-----------	-------



Frying basket

For deep-frying in baskets with AutoLift. Requires the with arm for automatic raising/lowering.

60.75.019	Size 2-XS	\$277
-----------	-----------	-------



Strainer

Serves to hold back loose boiled products while water is being drained.

60.74.666	Size 2-XS, 2-S	\$106
-----------	----------------	-------



Pan base rack

Used to prevent direct contact between food and pan base during low-temperature cooking.

60.74.832	Size 2-XS	\$92
-----------	-----------	------



Kit - 4 portion baskets

60.75.300	Kit - 4 perforated portion baskets 1/6 GN (6 7/8" x 6 3/8") with frame	\$477
60.75.978	Kit - 4 solid portion baskets 1/6 GN (6 7/8" x 6 3/8") with lid + frame	\$477
60.75.979	Kit - 4 frying portion baskets 1/6 GN (6 7/8" x 6 3/8") with frame	\$477
60.76.407	Kit 4 portioning baskets 1/6 GN (6 7/8" x 6 3/8") perforated, 4 portioning baskets 1/6 GN (6 7/8" x 6 3/8") non-perforated with lid, 2 portioning basket frames Size 2-XS. Save 10% over individual purchase prices.	\$858



Kit 2 portion baskets

60.75.302	Kit - 2 solid portion baskets with lid 1/6 GN (6 7/8" x 6 3/8")	\$199
60.75.303	Kit - 2 perforated portion baskets 1/6 GN (6 7/8" x 6 3/8")	\$199
60.75.982	Kit - 2 deep-frying portion baskets 1/6 GN (6 7/8" x 6 3/8")	\$199
60.75.311	Kit - 2 lids for portion baskets 1/6 GN (6 7/8" x 6 3/8")	\$61


Accessories Size 2-XS



VarioMobil 1/1 GN

Remove food safely and effortlessly, and transport it in 1/1 GN (12 3/4" x 20 7/8") (full hotel) pans (GN containers not included in delivery). Can be set to 4 heights.

60.73.349	Size 2-XS, 2-S	\$1,219
-----------	----------------	---------



Stand

2 pull out shelves, 6 pairs of 1/1 GN (12 3/4" x 20 7/8") supporting rails. Side panels and top closed, rear panel open.

60.31.221	With feet	\$2,286
60.31.538	With stainless steel feet	\$2,379
60.31.317	With casters	\$2,672
60.31.326	Stand with electrical height adjustment (closed back)	\$3,930



Unit anchoring kit

For securing the cooking system on an existing work surface or a stand (2 pc).

60.76.118	Size 2-XS, 2-S	\$123
-----------	----------------	-------



RATIONAL USB data storage device

42.00.162	USB 3.0 stick for cooking programs and HACCP data	\$20
-----------	---	------

Accessories Size 2-S

Accessory package

Save 10% over individual purchase prices.

87.00.742	Size 2-S	\$1,242
-----------	----------	---------

Consists of:

1 x 60.71.643 – Spatula	2 x 60.75.359 – Arm for automatic raising/lowering Size 2-S
1 x 60.74.986 – Boiling basket Size 2-S	1 x 60.75.330 – Frying basket Size 2-S
1 x 60.74.666 – Strainer Size 2-S	2 x 60.74.663 – Pan Base Rack Size 2-S
1 x 60.73.927 – Cleaning scrub	



Spatula

Stainless steel, ergonomic tool for turning and removing products in the iVario.

60.71.643	Size 2-XS, 2-S, L, XL	\$79
-----------	-----------------------	------



Scoop

Durable, reinforced, and heat resistant for safe and easy portioning.

60.73.348	Solid scoop	\$168
60.73.586	Perforated scoop	\$168



Automatic lifting and lowering arm

For boiling and frying baskets used with AutoLift.

60.75.359	Size 2-S	\$92
-----------	----------	------



Boiling basket

For boiling in baskets used with AutoLift. Requires the with arm for automatic raising/lowering.

60.74.986	Size 2-S	\$369
-----------	----------	-------



Frying basket

For deep-frying in baskets with AutoLift. Requires the with arm for automatic raising/lowering.

60.75.330	Size 2-S	\$369
-----------	----------	-------



Strainer

Serves to hold back loose boiled products while water is being drained.

60.74.666	Size 2-XS, 2-S	\$106
-----------	----------------	-------



Pan base rack

Used to prevent direct contact between food and pan base during low-temperature cooking

60.74.663	Size 2-S, L, XL	\$122
-----------	-----------------	-------



Kit - 6 portion baskets

60.75.305	Kit - 6 perforated portion baskets 1/6 GN (6 7/8" x 6 3/8") with frame	\$710
60.75.306	Kit - 6 solid portion baskets 1/6 GN (6 7/8" x 6 3/8") with lid + frame	\$710
60.75.307	Kit - 6 frying portion baskets 1/6 GN (6 7/8" x 6 3/8") with frame	\$710
60.76.408	Kit 6 portioning baskets 1/6 GN (6 7/8" x 6 3/8") perforated, 6 portioning baskets 1/6 GN (6 7/8" x 6 3/8") non-perforated with lid, 2 portioning basket frames Size 2-S. Save 10% over individual purchase prices.	\$1,277

Accessories Size 2-S



Kit 2 portion baskets

60.75.302	Kit - 2 solid portion baskets with lid 1/6 GN (6 7/8" x 6 3/8")	\$199
60.75.303	Kit - 2 perforated portion baskets 1/6 GN (6 7/8" x 6 3/8")	\$199
60.75.982	Kit - 2 deep-frying portion baskets 1/6 GN (6 7/8" x 6 3/8")	\$199
60.75.311	Kit - 2 lids for portion baskets 1/6 GN (6 7/8" x 6 3/8")	\$61



VarioMobil 1/1 GN

Remove food safely and effortlessly, and transport it in 1/1 GN (12 3/4" x 20 7/8") (full hotel) pans (GN containers not included in delivery). Can be set to 4 heights.


60.73.349	Size 2-XS, 2-S	\$1,219
-----------	----------------	---------



Basket cart

Cart for storing, transporting, and drip-drying frying and boiling baskets. Capacity: max. 16 1/1 GN trays or max. 3 baskets (Size 2-S or L, XL) 1 automatic lifting and lowering arm (Size L or XL)

60.73.612	Size 2-S, L, XL	\$1,512
-----------	-----------------	---------



Stand

2 pull out shelves, 6 pairs of 1/1 GN (12 3/4" x 20 7/8") supporting rails. Side panels and top closed, rear panel open.

60.31.319	With feet	\$2,904
60.31.539	With stainless steel feet	\$2,996
60.31.320	With casters	\$3,290
60.31.327	Stand with electrical height adjustment (closed back)	\$4,550



Unit anchoring kit

For securing the cooking system on an existing work surface or a stand (2 pc).

60.76.118	Size 2-XS, 2-S	\$123
-----------	----------------	-------



RATIONAL USB data storage device

42.00.162	USB 3.0 stick for cooking programs and HACCP data	\$20
-----------	---	------

Accessories Size L and XL

Accessory package

Save 10% over individual purchase prices.

87.00.743	Size L	\$1,396
87.00.744	Size XL	\$1,879

Size L consists of:

1 x 60.71.643 – Spatula	1 x 60.75.909 – Arm for automatic raising/lowering Size L
2 x 60.74.983 – Boiling basket Size L, XL	1 x 60.75.975 – Strainer Size L
2 x 60.74.663 – Pan Base Rack Size L, XL	1 x 60.73.927 – Cleaning scrub

Size XL consists of:

1 x 60.71.643 – Spatula	1 x 60.75.129 – Arm for automatic raising/lowering Size XL
3 x 60.74.983 – Boiling basket Size L, XL	1 x 60.74.908 – Strainer Size XL
3 x 60.74.663 – Pan Base Rack Size L, XL	1 x 60.73.927 – Cleaning scrub



Spatula

Stainless steel, ergonomic tool for turning and removing products in the iVario.

60.71.643	Size 2-XS, 2-S, L, XL	\$79
-----------	-----------------------	------



Scoop

Durable, reinforced, and heat resistant for safe and easy portioning.

60.73.348	Solid scoop	\$168
60.73.586	Perforated scoop	\$168



Automatic lifting and lowering arm

For boiling and frying baskets used with AutoLift.

60.75.909	Size L	\$277
60.75.129	Size XL	\$323



Boiling basket

For boiling in baskets used with AutoLift. Requires the with arm for automatic raising/lowering.

60.74.983	Size L, XL	\$369
-----------	------------	-------



Frying basket

For deep-frying in baskets with AutoLift. Requires the with arm for automatic raising/lowering.

60.75.391	Size L, XL	\$369
-----------	------------	-------



Strainer

Serves to hold back loose boiled products while water is being drained.

60.75.975	Size L	\$184
60.74.908	Size XL	\$184



Pan base rack

Used to prevent direct contact between food and pan base during low-temperature cooking. Recommendation: Size L: 2 pc., Size XL: 3 units

60.74.663	Size 2-S, L, XL	\$122
-----------	-----------------	-------

Accessories Size L and XL



VarioMobil 2/1 GN

Remove food safely and effortlessly, and transport it in 2/1 GN (25 5/8" x 20 7/8") or 1/1 GN (12 3/4" x 20 7/8") (full hotel) pans(GN containers not included in delivery). Height adjustable (2 positions).

60.70.107	Size L, XL	\$3,073
-----------	------------	---------



Basket cart

Cart for storing, transporting, and drip-drying frying and boiling baskets. Capacity: max. 16 1/1 GN trays or max. 3 baskets (Size 2-S or L, XL) 1 automatic lifting and lowering arm (Size L or XL)

60.73.612	Size 2-S, L, XL	\$1,512
-----------	-----------------	---------



Floor anchoring kit

For positioning the cooking system securely (assembly variation with plastic feet) on the floor (2 pc).

60.72.905	Size L, XL	\$163
-----------	------------	-------



RATIONAL USB data storage device

42.00.162	USB 3.0 stick for cooking programs and HACCP data	\$20
-----------	---	------

iVario care products



Kit cleaning arm, incl. 4 pads

Consists of 1 cleaning arm, 2 rough cleaning pads, 2 soft cleaning pads.

60.73.925	Size 2-XS, 2-S, L, XL	\$194
-----------	-----------------------	-------



Kit - 2 cleaning pads rough

For cleaning stubborn dirt and residue in combination with the cleaning arm.


60.73.922	Kit - 2 cleaning pads rough	\$74
-----------	-----------------------------	------



Kit - 2 cleaning pads soft

For cleaning dirt and residue in combination with the cleaning arm.

60.73.923	Kit - 2 cleaning pads soft	\$74
-----------	----------------------------	------



Kit - 6 cleaning scrubs

For fast, effective pan cleaning.


60.73.924	Kit - 6 cleaning scrubs	\$157
-----------	-------------------------	-------



Grill cleaner

For applications with consistent heavy duty use and excessive buildup. Not required for regular cleaning.

9006.0153	Liquid detergent 2.65 gal (10 l)	\$72
-----------	----------------------------------	------



Cleaning kit

Consists of 2.65 gal (10 l) grill cleaner, 1 cleaning arm, 2 rough cleaning pads, 2 soft cleaning pads, 1 cleaning sponge.

60.73.920	Cleaning kit	\$243
-----------	--------------	-------

Voltage Options, Installation Kits iVario

Voltage Options

The specific voltage option must be specified for each unit ordered.

Three Phase 60 Hz				
(208 V is field retrofittable to 240 V, 480 V is field retrofittable to 440 V)				
iVario	208V	240 V	440 V	480 V
iVario 2-XS	X	X	X	X
iVario Pro 2-S	X	X	X	X
iVario Pro L	X	X	X	X
iVario Pro XL	X	X	X	X

Installation Kits

RATIONAL Installation Kits ensure that the installer has all of the essential connection materials at the time of installation. These kits offer one-stop shopping versus buying parts at various suppliers or stores.

8730.1567US	iVario 2-XS (208/60/3ph & 240/60/3ph) iVario 2-XS (440/60/3ph & 480/60/3ph) iVario Pro 2-S (440/60/3ph & 480/60/3ph)	\$319.25
8730.1565US	iVario Pro 2-S (208/60/3ph & 240/60/3ph) iVario Pro L (208/60/3ph & 240/60/3ph) iVario Pro L (440/60/3ph & 480/60/3ph) iVario Pro XL (440/60/3ph & 480/60/3ph)	\$403.33
8730.1566US	iVario Pro XL (208/60/3ph & 240/60/3ph)	\$431.03
8730.1568US	iVario, iVario Pro Standard copper drain only kit (Water hose and electrical hardwire components not included)	\$106.21

Water Filtration System (includes filter installation kit)

1900.1154US	Single Cartridge System for all up-to two iVario units. Includes Filter head, one cartridge and parts for installation. 24h	\$550
1900.1155US	Water Filtration Cartridge (replacement).	\$360

iVario features

iVario	2-XS	Pro 2-S	Pro L	Pro XL
Functions				
iCookingSuite, intelligent cooking assistant with 6 cooking modes (meat, fish, vegetables and sides, egg dishes, dairy dishes and desserts, soups and sauces) and 5 cooking processes (boiling, pan-frying, deep-frying, braising, and Finishing), allows users to specify desired results easily, automatically adjusts ideal cooking process.	●	●	●	●
Country-specific preset cooking parameters independent of language settings; option to set a second country cuisine	●	●	●	●
Low temperature cooking (including overnight), confit, sous-vide cooking	○	●	●	●
iZoneControl – Flexible division of the pan base into zones of different temperatures	○	●	●	●
Manual mode: Cooking with full control over liquid, oil, and pan base temperatures. Temperature range from 85°F–482°F (30°C–250°C)	●	●	●	●
iVarioBoost energy management	●	●	●	●
Create user-specific MyDisplay profiles for individual unit and control configurations, e.g. custom home screens	●	●	●	●
1,200 programs with up to 12 steps can be created and named as needed	●	●	●	●
Two pans that can be used independently from each other	●	●	–	–
AutoLift automated lifting and lowering mechanism for cooking in baskets	●	●	●	●
Cooking medium automatically identified in pan	●	●	●	●
Delta-T cooking for gentle cooking of large meat cuts	●	●	●	●
Sensitive cooking allows gentle preparation of delicate products	●	●	●	●
Water outlet automatically fills the pan to the exact quart	●	●	●	●
Pressure-cooking function for shorter cooking times and greater productivity (available 2021 in USA)	–	○	○	○
Operation				
10.1" TFT color display with capacitive glass touchscreen, with self-explanatory symbols for easy, intuitive operation	●	●	●	●
Selection dial with "Push" function to confirm input	●	●	●	●
User guidance available in over 40 languages	●	●	●	●
Top 10 favorites list of most frequently used iCookingSuite cooking paths and manual programs, easy to find under the Favorites star on the home screen	●	●	●	●
Digital temperature displays	●	●	●	●
Displays target and actual values	●	●	●	●
Digital timer 0–24 hrs. with continuous mode, optional hours/minutes or minutes/seconds settings.	●	●	●	●
Adjustable display contrast and ringtones	●	●	●	●
Comprehensive, context-sensitive search and help functions	●	●	●	●
Digital user manual, including practical tips and comprehensive application examples which can be started directly from the manual as cooking paths	●	●	●	●
Monitor unit via PC, smartphone or tablet using ConnectedCooking (available in 2021)	●	●	●	●
Features				
iVarioBoost heating system	●	●	●	●
Fast-reaction, scratch resistant, high-performance pan base	●	●	●	●
Core temperature probe with 6 measurement points (1 probe per pan)	●	●	●	●
Cooking or cleaning water is drained directly through the integrated pan drain	●	●	●	●
Integrated, ergonomic hand shower with automatic retraction mechanism, two spray modes (shower spray and jet spray) and integrated water shut-off function	●	●	●	●
Temperature unit can be set in °F or °C	●	●	●	●
Magnetic core temperature probe holder	●	●	●	●
Electrically powered pan tilting mechanism	●	●	●	●
Electric motor opens and closes the lid (manually open the smaller units)	–	–	●	●
Lid with integrated water outlet	●	●	●	●
ServiceDiagnostic System (SDS) with automatic service notices display	●	●	●	●

iVario features

iVario	2-XS	Pro 2-S	Pro L	Pro XL
Cold water connection (incl. water supply hose 4.92 ft (1.50 m))	●	●	●	●
SOLAS (Safety of Lives on Sea) signal output	○	○	○	○
Integrated WiFi interface, e.g. for connecting to ConnectedCooking	○	●	●	●
Special voltages on request (e.g., 3 AC 440/480 V)	○	○	○	○
Stainless steel used for interior and exterior materials	●	●	●	●
Power cable 31 1/2 inches (800 mm) long (+3 7/8 inches (100 mm) to connection in device, +3 7/8 inches (100 mm) in the terminal box).	●	●	-	-
Power cable duct	-	-	●	●
Setup				
Plastic feet - height: 3 1/2 in (90 mm)	●	●	-	-
Stand with feet	○	○	-	-
Stand with stainless steel feet	○	○	-	-
Stand with casters	○	○	-	-
Stand with electric height adjustable feet	○	○	-	-
Base with plastic feet	-	-	●	●
Unit with stainless-steel feet	-	-	○	○
Unit with casters	-	-	○	○
Base with electrically powered height adjustment	-	-	○	○
Rear panel for base	-	-	○	○
Storage cabinet in base	-	-	○	○
Hygiene, work safety, and ergonomic design				
Operating and warning display, e.g. hot oil when deep-frying	●	●	●	●
Lockable deep-fry mode	○	○	○	○
Lockable control panel	○	○	○	○
Ethernet interface, e.g., for connecting to ConnectedCooking	●	●	●	●
USB port for downloading HACCP and service data or transferring cooking programs using the RATIONAL USB stick, and to facilitate software updates	●	●	●	●
Safety temperature limiter	●	●	●	●
Technical compartment accessible from front	●	●	●	●
Pan interior with rounded edges and no open seams	●	●	●	●
Test certificates				
Declaration of conformity: CE	●	●	●	●
Electrical safety: SEMKO Intertek, ETL Safety, INMETRO, NOM	●	●	●	●
Operating safety: GS, EAC, Watermark, IRAM, UA TR	●	●	●	●
Hygiene safety: ETL Sanitation, NSF	●	●	●	●
Drinking water protection: SVGW, TZW	●	●	●	●
Class IPX 5 protection against splashing and spraying water	●	●	●	●

● Standard ○ Optional – Not available

iVario certifications

The following certification seals confirm that our cooking systems meet defined standards and guidelines set forth by independent testing and certification bodies. So that you will know at first glance that our systems meet national and international safety standards, that we prioritize exceptional product quality, and that we demonstrably maintain that quality. Additional information is available at rational-online.com.



CE conformity defines the major safety requirements on products marketed within Europe.



The GS sign is recognized in Europe as a symbol of safety. The GS sign guarantees the end consumer that the product has undergone a safety check by an authorized, independent third party (Intertek).



The NSF guarantees international adherence to NSF/ANSI hygiene standards when new appliances are brought onto the market.



The ETL Safety Symbol is a safety indicator for the North American market. It signals that products have been tested in an accredited third-party testing laboratory and meet the applicable safety standards and minimum requirements for distribution within North America.



ETL Sanitation guarantees international adherence to NSF/ANSI hygiene standards when new appliances are brought onto the North American market.



This certificate sets forth quality, safety, and usage requirements on gas and water appliances brought onto the Swiss market.



The EAC defines the most important Eurasian quality and safety requirements on appliances.



Watermark certifies appliances for the Australian market, ensuring that they are suitable and appropriately approved for their intended use.



INMETRO is relevant to all electrical appliances or components with connected loads under 20 kW in Brazil.



IRAM specifies approval requirements for the Argentinian market, focusing on electronics, gas, mechanics, hygiene, safety, and food.



The DNV GL is an international classification society that certifies marine versions of appliances.



The Norm Official Mexican Standard, NOM for short, is the name of a range of official, binding standards and regulations for various activities within Mexico.



The UA TR defines the most important requirements on appliances pursuant to Ukrainian quality and safety standards.



TZW: offers hygienic suitability inspections with a special focus on drinking water protection for all segments of the national and international water industry.



As an international provider of professional cooking systems, RATIONAL has authorized its products for wireless connectivity wherever this is allowed. Please do not hesitate to contact us for more information.

ConnectedCooking



ConnectedCooking is a Cloud-based networking solution and application for mobile end devices for the automatic documentation of HACCP data, for the creation of cooking programs and cooking program management, and for automatic software updates. ConnectedCooking follows the motto: "Comfort. Safety. Inspiration." and offers completely new and convenient application options.

As a Cloud platform, it allows all functions to be used directly. For iPhones, iPads and Android tablets and Android smart phones, the ConnectedCooking app is available for download in the relevant app stores.

Register at: ConnectedCooking.com

Wi-Fi adapter

WiFi adapter with cable bushing, mounting strips, cleaning cloth, magnet, and current limiter. Suitable for SelfCookingCenter models manufactured 09/2011 or after, iCombi (except Size XS) and iVario (except Size 2-XS). The WiFi adapter allows RATIONAL cooking systems with Ethernet connectivity to connect to a WiFi access point; it can also be used as a range extender, providing an additional WiFi access point for connecting up to five additional cooking systems wirelessly.

60.76.714	WiFi adapter set with short cable for table-top units	\$340
60.76.603	WiFi adapter set with long cable for floor units	\$340

☎ 224-366-3500 ☎ Toll Free 888-320-7274 Fax: 847-755-9583, ChefLine (866) 306-2433, Tech. Hotline: ☎ 866-891-3528
 1701 Golf Road, Suite C-120, Commerce • Rolling Meadows, IL 60008
www.rationalusa.com

Our Terms and Conditions

Delivery:	FOB Rolling Meadows, IL. Inventoried items are available for shipment within 4 days of order confirmation. Production lead time on out of stock items is 5-8 weeks. Please call for inventory status.
Certified Installation:	A professionally reviewed and managed install process. Any additional cost for the installation outside of the RATIONAL Certified Installation Program is the responsibility of the customer. For detailed information, please refer to the RATIONAL Certified Installation Flyer. RATIONAL Certified installation program includes the assembly of the unit, setting the equipment in place, leveling it, and connecting the unit to the customer-provided utilities within three feet of the unit's installed location. If the final connections cannot be completed by the RATIONAL installer due to local codes and/or government authorities, the RATIONAL installer will, upon request, provide supervision of the final connections. The use of any additional contractor labor, travel, and/or parts is the responsibility of the customer.
Pre-Installation Site Survey:	The RATIONAL installer will perform a Pre-Installation Site Survey of the location, where the RATIONAL equipment is to be installed. Upon completion of the evaluation, the installer will advise of required site preparations needed before installation can commence. Survey of site outside of a 50 mile radius from installer will require an additional travel charge.
Contractor labor:	On day of installation, customer is responsible to ensure that equipment is within 5 feet of installation location upon arrival of RATIONAL installer. Installation of units outside of a 50 mile radius from installer will require an additional travel charge.

RATIONAL Certified Installation

Installation includes:	Installation does not include:
1) Travel within 50 miles (100 miles round trip) of the installer	1) A Pre-Installation Site Survey
2) Assembly and stacking of the purchased equipment	2) Overtime travel or labor
3) Placement and leveling of the purchased equipment	3) Delivery of equipment to end user within 5 feet of final location
4) Connection of utilities within 3 feet of unit placement	4) Travel outside 50 miles (100 miles round trip) of the installer
5) Operational/Functional test	5) Special licensing or permits
	6) Unpacking, uncrating, and removal of packing material
	7) Connection of utilities beyond 3 feet
	8) Removal and scrapping of old equipment
Pre-Installation Site Survey:	Pre-Installation Site Survey can only be purchased with a Certified Installation. Pre-Installation Site Survey ensures that the site has the proper space and connections for gas, electric, drain, and water. The Pre-Installation Site Survey includes 50 miles (100 miles round trip) from the installer.
Chef Assistance:	4 hours of training by a RATIONAL Certified Chef on your cooking system will be provided.
Warranty:	The RATIONAL Limited Warranty. The warranty for our unit lasts for 2 years from the date of invoice or the proven installation date. If the purchaser holds the warranty certificate for the unit after correctly completing the warranty registration procedure. There is also a 5 year warranty on the steam generator for units in North America.
Price Quoted:	Pertains to all general terms of sale, delivery, and payment, conforming to all agreed upon terms of sale. All sales are final. There is up to a 25% restocking fee on authorized returns that are accompanied by a RATIONAL RGA number. Special order/non-stock items are non-returnable. This pricing supercedes all earlier listings. Prices are subject to change without notice.
Technical Modification:	Subject to change without notice.

Subject to terms defined in the full warranty policy.

RATIONAL USA Inc.

1701 Golf Road, Suite C-120, Commerce

Rolling Meadows, IL 60008

Toll Free: 888-320-7274

Fax: 847-755-9583

info@rational-online.us

rationalusa.com