




# 7PROOF


1400 PMMA | 5.000 K

Art.Nr.: 821450400038  
EAN: 4260374014478



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

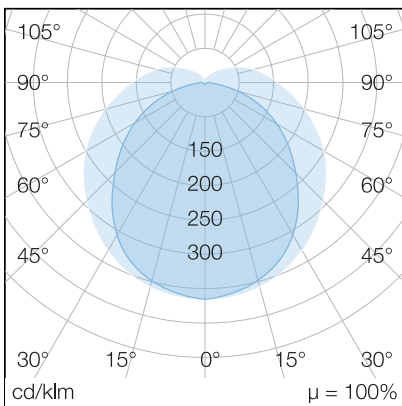

## LIGHT INFORMATION

beam angle	130°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	> 83

## PROPERTIES

through-wiring	No
connection	Cable: 2 x 0,75 mm <sup>2</sup> , 2,0 m
power factor	> 0.95
module per circuit breaker B10A	49
module per circuit breaker B16A	79
module per circuit breaker C10A	49
module per circuit breaker C16A	79
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

7PROOF 1400 PMMA   5.000 K	
product code	821450400038
EAN code	4260374014478
warranty	5 years

## ACCESSORIES

No accessories available
--------------------------

## PERFORMANCE

luminous efficiency	150 lm/W
system performance	40 W
luminous flux	6.000 lm
dimnable	No

## RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP69
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	-25 to +50 °C
foodready	Yes

## MATERIAL

cover	diffuse cover
material (cover)	PMMA
material (housing)	PMMA
housing color	White

## SCOPE OF DELIVERY

includes 2x mounting clip; DALI on request
--

## DIMENSION

L x W x H / Ø (H2)	1.400 x Ø 48 (63) mm
weight	0,8 kg