




Art.Nr.: 701540560082  
EAN: 4260374014850

# ClickLUX 2.0 4000-90



## LIGHT DISTRIBUTION CURVE

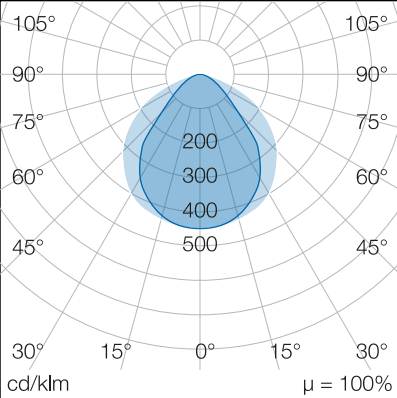

## TECHNICAL DRAWING



## LIGHT INFORMATION

|                       |          |
|-----------------------|----------|
| beam angle            | 90°      |
| color temperature     | 4.000 K  |
| color tolerance       | < 4 SDCM |
| color rendering index | > 80     |

## PROPERTIES

|                                 |   |
|---------------------------------|---|
| through-wiring                  | 4 x 1,5 mm <sup>2</sup> + 1 x 2,5 mm <sup>2</sup> |
| connection                      | Plug: 7-pole max. 2,5 mm <sup>2</sup>             |
| power factor                    | > 0.90  |
| module per circuit breaker B10A | 36  |
| module per circuit breaker B16A | 57  |
| module per circuit breaker C10A | 36  |
| module per circuit breaker C16A | 57  |
| switching cycles                | > 500.000   |
| voltage range AC                | 220 – 240 V AC, 50/60 Hz                          |
| voltage range DC                | 176 – 264 V DC                                    |

## ORDER OVERVIEW

|                      |               |
|----------------------|---------------|
| ClickLUX 2.0 4000-90 |               |
| product code         | 701540560082  |
| EAN code             | 4260374014850 |
| warranty             | 5 years       |

## ACCESSORIES

|  |
|--|
| ClickLUX connection plug                   |
| ClickLUX connector cable 1500mm            |
| ClickLUX 2.0 blank module                  |
| ClickLUX 2.0 blank cover                   |
| ClickLUX 2.0 clip system 1                 |
| ClickLUX 2.0 clip system 3                 |
| ClickLUX 2.0 mounting clip for blank cover |

## PERFORMANCE

|                     |              |
|---------------------|--------------|
| luminous efficiency | 155 lm/W     |
| system performance  | 56 W         |
| luminous flux       | 8.700 lm     |
| dimnable            | Slide switch |

## RESILIENCE

|                       |                       |
|-----------------------|-----------------------|
| protection class      | I                     |
| impact resistance     | IK05                  |
| protection type       | IP40                  |
| lifespan              | > 50.000 h [L80, B10] |
| UV resistant          | Limited               |
| operating temperature | -25 to +50 °C         |
| foodready             | Available on request  |

## MATERIAL

|                    |               |
|--------------------|---------------|
| cover              | diffuse cover |
| material (cover)   | PC            |
| material (housing) | Aluminium     |
| housing color      | Grey          |

## SCOPE OF DELIVERY

|   |
|---|
| mounting clip system type 2 pre-installed |
|---|

## DIMENSION

|                    |                         |
|--------------------|-------------------------|
| L x W x H / Ø (H2) | 1.528 x 67 x 28 (60) mm |
| weight             | 2,0 kg                  |