





Art.Nr.: 701550560087  
EAN: 4260374014904

# ClickLUX 2.0 5000-30



## LIGHT DISTRIBUTION CURVE

## TECHNICAL DRAWING

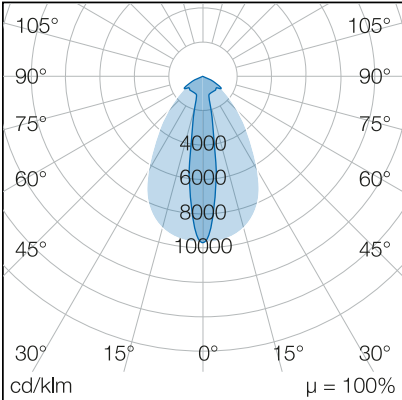

## LIGHT INFORMATION

beam angle	30°
color temperature	5.000 K
color tolerance	< 4 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	4 x 1,5 mm <sup>2</sup> + 1 x 2,5 mm <sup>2</sup>
connection	Plug: 7-pole max. 2,5 mm <sup>2</sup>
power factor	> 0.90
module per circuit breaker B10A	36
module per circuit breaker B16A	57
module per circuit breaker C10A	36
module per circuit breaker C16A	57
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz
voltage range DC	176 – 264 V DC

## ORDER OVERVIEW

ClickLUX 2.0 5000-30	
product code	701550560087
EAN code	4260374014904
warranty	5 years

## ACCESSORIES

ClickLUX connection plug
ClickLUX connector cable 1500mm
ClickLUX 2.0 blank module
ClickLUX 2.0 blank cover
ClickLUX 2.0 clip system 1
ClickLUX 2.0 clip system 3
ClickLUX 2.0 mounting clip for blank cover

## PERFORMANCE

luminous efficiency	152 lm/W
system performance	56 W
luminous flux	8.500 lm
dimnable	Slide switch

## RESILIENCE

protection class	I
impact resistance	IK05
protection type	IP40
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-25 to +50 °C
foodready	Available on request

## MATERIAL

cover	Transparent cover
material (cover)	PC
material (housing)	Aluminium
housing color	Grey

## SCOPE OF DELIVERY

mounting clip system type 2 pre-installed
---

## DIMENSION

L x W x H / Ø (H2)	1.528 x 67 x 28 (60) mm
weight	2,0 kg