





Art.Nr.: 722095240128  
EAN: 4260374015550

# ClickLUX ROCKET 90EM, für Zentralbatterie



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

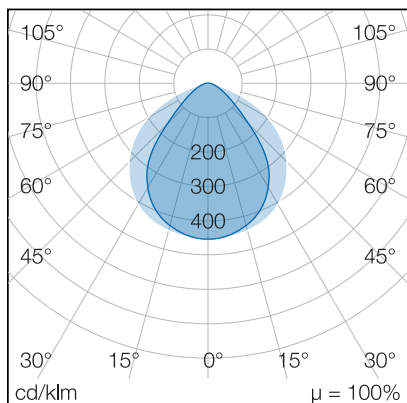

## LIGHT INFORMATION

|                       |                         |
|-----------------------|-------------------------|
| beam angle            | 90°                     |
| color temperature     | 4.000   5.000   6.500 K |
| color tolerance       | < 5 SDCM                |
| color rendering index | > 83                    |

## PROPERTIES

|                  |   |
|------------------|---|
| through-wiring   | 6 x 1,5 mm <sup>2</sup> + 1 x 2,5 mm <sup>2</sup> |
| connection       | Plug: 7-pole max. 2,5 mm <sup>2</sup>             |
| power factor     | > 0.95  |
| switching cycles | > 500.000   |
| voltage range AC | 220 – 240 V AC, 50/60 Hz                          |
| voltage range DC | 176 – 264 V DC                                    |

## ORDER OVERVIEW

ClickLUX ROCKET 90EM, for central power supply

|              |               |
|--------------|---------------|
| product code | 722095240128  |
| EAN code     | 4260374015550 |
| warranty     | 5 years       |

## ACCESSORIES

|   |
|---|
| ClickLUX ROCKET blank module 1m           |
| ClickLUX ROCKET blank module 2m           |
| ClickLUX ROCKET blank module 1m (Plastic) |
| ClickLUX ROCKET blank module 2m (Plastic) |
| ClickLUX ROCKET Connector-Set             |
| ClickLUX ROCKET chain suspension          |
| Cord suspension 2m                        |
| Cord suspension 5m                        |

## PERFORMANCE

|                     |                     |
|---------------------|---------------------|
| luminous efficiency | 151 lm/W            |
| system performance  | 76 W                |
| luminous flux       | 11.500 lm           |
| dimnable            | Slide switch   DALI |

## RESILIENCE

|                       |                       |
|-----------------------|-----------------------|
| protection class      | I                     |
| impact resistance     | IK05                  |
| protection type       | IP54                  |
| lifespan              | > 50.000 h [L80, B10] |
| UV resistant          | Limited               |
| operating temperature | -10 to +50 °C         |
| foodready             | Yes                   |

## MATERIAL

|                    |               |
|--------------------|---------------|
| cover              | diffuse cover |
| material (cover)   | PC            |
| material (housing) | Aluminium     |
| housing color      | Grey          |

## SCOPE OF DELIVERY

includes 1x clip for ceiling- or cord mounting

## DIMENSION

|                    |                         |
|--------------------|-------------------------|
| L x W x H / Ø (H2) | 2.000 x 67 x 47 (84) mm |
| weight             | 3,1 kg                  |