





Art.Nr.: 722095750147  
EAN: 4260374016854

# ClickLUX ROCKET SL SL 90



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

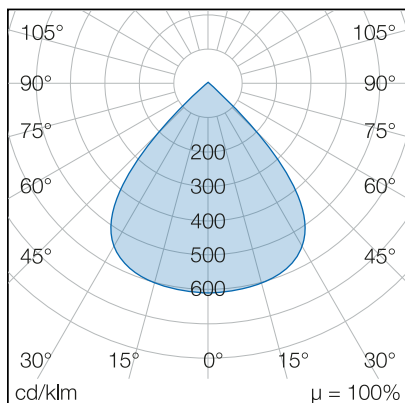

## LIGHT INFORMATION

beam angle	25 x 60°
color temperature	4.000   5.000   6.500 K
color tolerance	< 5 SDCM
color rendering index	> 83

## PROPERTIES

through-wiring	6 x 1,5 mm <sup>2</sup> + 1 x 2,5 mm <sup>2</sup>
connection	Plug: 7-pole max. 2,5 mm <sup>2</sup>
power factor	> 0.95
module per circuit breaker B10A	27
module per circuit breaker B16A	42
module per circuit breaker C10A	27
module per circuit breaker C16A	42
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz
voltage range DC	176 – 276 V DC

## ORDER OVERVIEW

ClickLUX ROCKET SL 90	
product code	722095750147
EAN code	4260374016854
warranty	5 years

## ACCESSORIES

ClickLUX ROCKET blank module 1m
ClickLUX ROCKET blank module 2m
ClickLUX ROCKET blank module 1m (Plastic)
ClickLUX ROCKET blank module 2m (Plastic)
ClickLUX ROCKET Connector-Set
ClickLUX ROCKET chain suspension
Cord suspension 2m
Cord suspension 5m

## PERFORMANCE

luminous efficiency	155 lm/W
system performance	76 W
luminous flux	11.750 lm
dimnable	Slide switch   DALI

## RESILIENCE

protection class	I
impact resistance	IK08
protection type	IP54
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-20 to +50 °C
foodready	Yes

## MATERIAL

cover	Transparent cover
material (cover)	PC
material (housing)	Aluminium
housing color	Grey

## SCOPE OF DELIVERY

includes 1x clip for ceiling- or cord mounting

## DIMENSION

L x W x H / Ø (H2)	2.000 x 67 x 47 (56) mm
weight	3,1 kg