




DeLUX
INDUSTRY
1200 | 6.500 K


Art.Nr.: 881265100218R
EAN: 4260374011408



LIGHT DISTRIBUTION CURVE

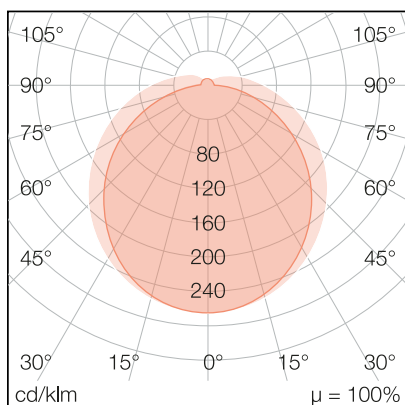

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	130°
color temperature	6.500 K
color tolerance	< 3 SDCM
color rendering index	> 83

PROPERTIES

through-wiring	No
connection	G13
power factor	> 0.95
module per circuit breaker B10A	115
module per circuit breaker B16A	184
module per circuit breaker C10A	115
module per circuit breaker C16A	184
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz

ORDER OVERVIEW

DeLUX INDUSTRY 1200 I 6.500 K	
product code	881265100218R
EAN code	4260374011408

ACCESSORIES

DeLUX Starter Holder

PERFORMANCE

luminous efficiency	139 lm/W
system performance	18 W
luminous flux	2.500 lm
dimnable	No

RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP40
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-20 to +50 °C
foodready	No

MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

SCOPE OF DELIVERY

includes LED-Starter

DIMENSION

L x W x H / Ø (H2)	1.200 x Ø 26 mm
weight	0,3 kg