



DeLUX

# PROFESSIONAL PLUS

1500 | 5.000 K


Art.Nr.: 881550100228R

EAN: 4260374011989



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

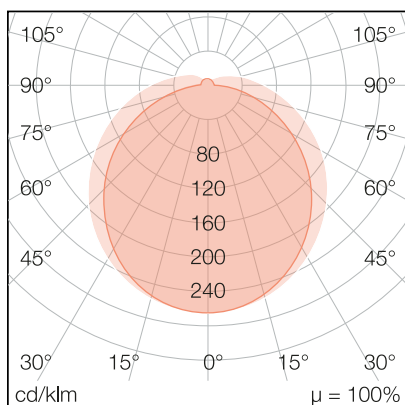

## LIGHT INFORMATION

beam angle	130°
color temperature	5.000 K
color tolerance	< 3 SDCM
color rendering index	> 83

## PROPERTIES

through-wiring	No
connection	G13
power factor	> 0.95
module per circuit breaker B10A	74
module per circuit breaker B16A	118
module per circuit breaker C10A	74
module per circuit breaker C16A	118
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

DeLUX PROFESSIONAL PLUS 1500 I  
5.000 K

product code	881550100228R
EAN code	4260374011989

## ACCESSORIES

DeLUX Starter Holder
----------------------

## PERFORMANCE

luminous efficiency	150 lm/W
system performance	28 W
luminous flux	4.200 lm
dimnable	No

## RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP40
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-20 to +50 °C
foodready	No

## MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

## SCOPE OF DELIVERY

includes LED-Starter
----------------------

## DIMENSION

L x W x H / Ø (H2)	1.500 x Ø 26 mm
weight	0,3 kg