




# FloodLUX COMPACT 10


Art.Nr.: 455012010002  
EAN: 4260374012702



## LIGHT DISTRIBUTION CURVE

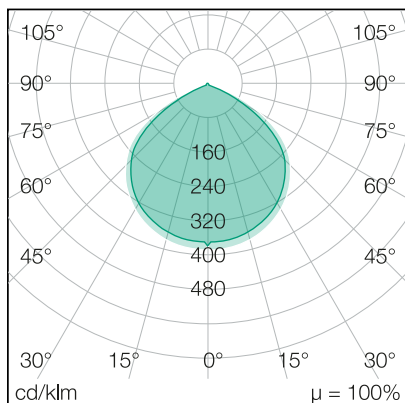

## TECHNICAL DRAWING

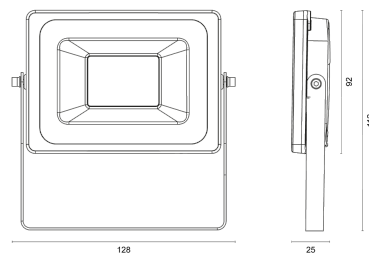

## LIGHT INFORMATION

beam angle	120°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	> 70

## PROPERTIES

through-wiring	No
connection	Cable: 3 x 1,0 mm <sup>2</sup> , 0,5 m
power factor	> 0.95
module per circuit breaker B10A	100
module per circuit breaker B16A	160
module per circuit breaker C10A	166
module per circuit breaker C16A	266
switching cycles	> 200.000
voltage range AC	220 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

FloodLUX COMPACT 10	
product code	455012010002
EAN code	4260374012702
warranty	2 years

## ACCESSORIES

No accessories available
--------------------------

## PERFORMANCE

luminous efficiency	90 lm/W
system performance	10 W
luminous flux	900 lm
dimnable	No

## RESILIENCE

protection class	I
impact resistance	IK05
protection type	IP65
lifespan	> 40.000 h [L70, B10]
UV resistant	Yes
operating temperature	-20 to +45 °C
foodready	No

## MATERIAL

cover	Transparent cover
material (cover)	Glass
material (housing)	Aluminium
housing color	Black

## SCOPE OF DELIVERY

no accessory included
-----------------------

## DIMENSION

L x W x H / Ø (H2)	128 x 92 (112) x 25 (88) mm
weight	0,3 kg