




FloodLUX MOTION 50


Art.Nr.: 455024050017
EAN: 4260374015895



LIGHT DISTRIBUTION CURVE

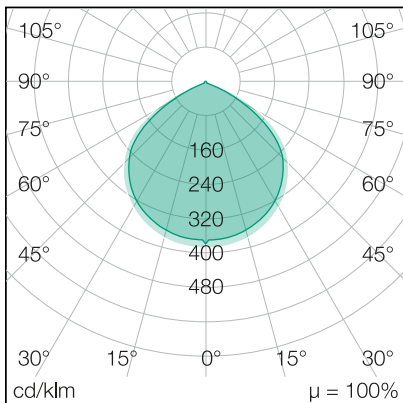

TECHNICAL DRAWING

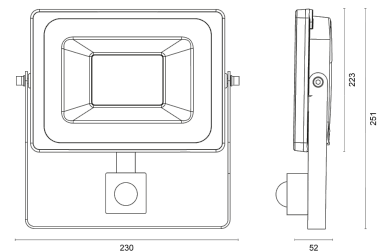

LIGHT INFORMATION

| | |
|-----------------------|----------|
| beam angle | 120° |
| color temperature | 5.000 K |
| color tolerance | < 5 SDCM |
| color rendering index | > 70 |

PROPERTIES

| | |
|---------------------------------|--|
| through-wiring | No |
| connection | Cable: 3 x 1,0 mm ² , 0,5 m |
| power factor | > 0.95 |
| module per circuit breaker B10A | 41 |
| module per circuit breaker B16A | 66 |
| module per circuit breaker C10A | 41 |
| module per circuit breaker C16A | 66 |
| switching cycles | > 200.000 |
| voltage range AC | 220 – 240 V AC, 50/60 Hz |

ORDER OVERVIEW

| | |
|--------------------|---------------|
| FloodLUX MOTION 50 | |
| product code | 455024050017 |
| EAN code | 4260374015895 |
| warranty | 2 years |

ACCESSORIES

| |
|--------------------------|
| No accessories available |
|--------------------------|

PERFORMANCE

| | |
|---------------------|----------|
| luminous efficiency | 90 lm/W |
| system performance | 50 W |
| luminous flux | 4.500 lm |
| dimnable | No |

RESILIENCE

| | |
|-----------------------|-----------------------|
| protection class | I |
| impact resistance | IK05 |
| protection type | IP54 |
| lifespan | > 40.000 h [L70, B10] |
| UV resistant | Yes |
| operating temperature | -20 to +45 °C |
| foodready | No |

MATERIAL

| | |
|--------------------|-------------------|
| cover | Transparent cover |
| material (cover) | Glass |
| material (housing) | Aluminium |
| housing color | Black |

SCOPE OF DELIVERY

| |
|-----------------------|
| no accessory included |
|-----------------------|

DIMENSION

| | |
|--------------------|-------------------------------|
| L x W x H / Ø (H2) | 230 x 223 (251) x 52 (211) mm |
| weight | 1,1 kg |