




**FloodLUX
PRO**
60 | 50 x 125° | 4.000K


Art.Nr.: 45400600027
EAN: 4260374018339



LIGHT DISTRIBUTION CURVE

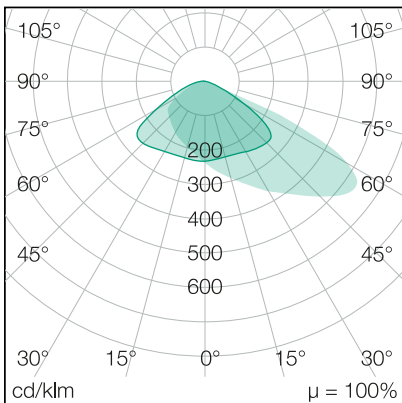

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	50 x 125°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	No
connection	Cable: 3 x 1,0 mm ² , 1,3 m
power factor	> 0.90
module per circuit breaker B10A	8
module per circuit breaker B16A	13
module per circuit breaker C10A	14
module per circuit breaker C16A	22
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

ORDER OVERVIEW

FloodLUX PRO 60 50 x 125° 4.000K	
product code	454006000027
EAN code	4260374018339
warranty	5 years

ACCESSORIES

No accessories available

PERFORMANCE

luminous efficiency	142 lm/W
system performance	60 W
luminous flux	8.500 lm
dimnable	No

RESILIENCE

protection class	I
impact resistance	IK08
protection type	IP66
lifespan	> 60.000 h [L80, B10]
UV resistant	Yes
operating temperature	-30 to +45 °C
foodready	No

MATERIAL

cover	Transparent cover
material (cover)	Glass
material (housing)	Aluminium
housing color	Black

SCOPE OF DELIVERY

no accessory included

DIMENSION

L x W x H / Ø (H2)	308 x 317 (360) x 83 (153) mm
weight	4,3 kg