





Art.Nr.: 431050650011
EAN: 4260374011170

INDUSTRYLUX 164



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

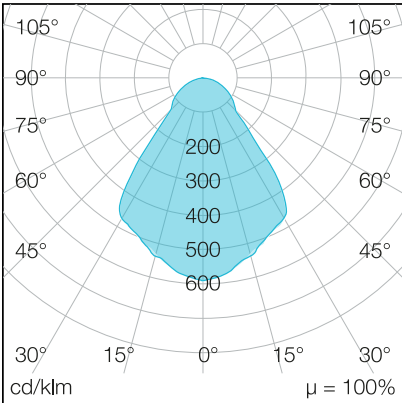

LIGHT INFORMATION

beam angle	120°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	< 80

PROPERTIES

through-wiring	No
connection	Cable: 3 x 1,0 mm ² , 1,5 m
power factor	> 0.95
module per circuit breaker B10A	3
module per circuit breaker B16A	5
module per circuit breaker C10A	5
module per circuit breaker C16A	8
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

ORDER OVERVIEW

IndustryLUX 164	
product code	431050650011
EAN code	4260374011170
warranty	5 years

ACCESSORIES

80° plastic refractor für IndustryLUX series 034-205
80° aluminium reflector für IndustryLUX series 034-205
100° plastic refractor für IndustryLUX series 034-205
100° aluminium reflector für IndustryLUX series 034-205
120° aluminium reflector für IndustryLUX series 034-205

PERFORMANCE

luminous efficiency	145 lm/W
system performance	120 W
luminous flux	17.700 lm
dimnable	No

RESILIENCE

protection class	I
impact resistance	IK10
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-30 to +50 °C
foodready	No

MATERIAL

cover	Transparent cover
material (cover)	PC
material (housing)	Aluminium
housing color	Grey

SCOPE OF DELIVERY

no accessory included

DIMENSION

L x W x H / Ø (H2)	Ø 209 (277) x 353 mm
weight	6,9 kg