




Art.Nr.: 431050650022
EAN: 4260374011217


INDUSTRYLUX 274



LIGHT DISTRIBUTION CURVE

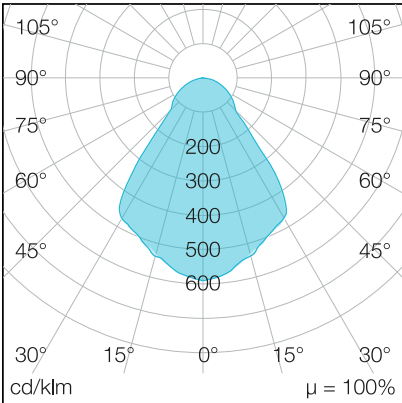

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	120°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	< 80

PROPERTIES

through-wiring	No
connection	Cable: 3 x 1,0 mm ² , 1,5 m
power factor	> 0.95
module per circuit breaker B10A	1
module per circuit breaker B16A	2
module per circuit breaker C10A	3
module per circuit breaker C16A	4
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

ORDER OVERVIEW

IndustryLUX 274	
product code	431050650022
EAN code	4260374011217
warranty	5 years

ACCESSORIES

120° aluminium reflector für IndustryLUX series 274-375
80° plastic refractor für IndustryLUX series 274-375
80° aluminium reflector für IndustryLUX series 274-375
100° aluminium reflector für IndustryLUX series 274-375

PERFORMANCE

luminous efficiency	147 lm/W
system performance	200 W
luminous flux	30.500 lm
dimnable	No

RESILIENCE

protection class	I
impact resistance	IK06
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	-30 to +50 °C
foodready	No

MATERIAL

cover	Transparent cover
material (cover)	Glass
material (housing)	Aluminium
housing color	Grey

SCOPE OF DELIVERY

no accessory included

DIMENSION

L x W x H / Ø (H2)	Ø 300 (315) x 485 mm
weight	9,9 kg