



Art.Nr.: 111550460130  
EAN: 4260374016953


# IndustryLUX FARO X3

1500-140 MOTION I 5.000 K



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

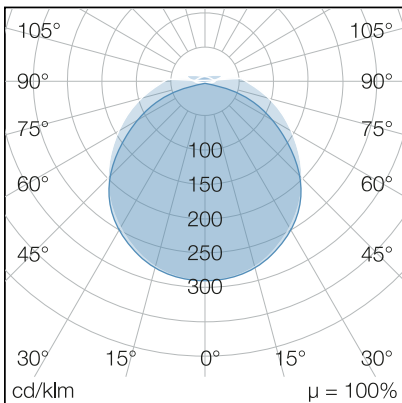

1500

## LIGHT INFORMATION

beam angle	140°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	> 83

## PROPERTIES

through-wiring	5 x 1,5 mm <sup>2</sup>
connection	Terminal: 5-pole max. 1,5 mm <sup>2</sup>
power factor	> 0.95
module per circuit breaker B10A	30
module per circuit breaker B16A	48
module per circuit breaker C10A	43
module per circuit breaker C16A	69
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

IndustryLUX FARO X3 1500-140  
MOTION I 5.000 K

product code	111550460130
EAN code	4260374016953
warranty	5 years

## ACCESSORIES

Mounting plate for 2-3 luminaires

Cord suspension 2m

Top-Entry-Cap

## PERFORMANCE

luminous efficiency	152 lm/W
system performance	46 W
luminous flux	7.000 lm
dimnable	No

## RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-25 to +50 °C

## MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

## SCOPE OF DELIVERY

includes 2x mounting clip and cable gland M20

## DIMENSION

L x W x H / Ø (H2)	1.530 x 104 x 63 (83) mm
weight	2,3 kg