




# IndustryLUX FARO X3


1500-75 | 4.000 K

Art.Nr.: 111540460015  
EAN: 4260374013914



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

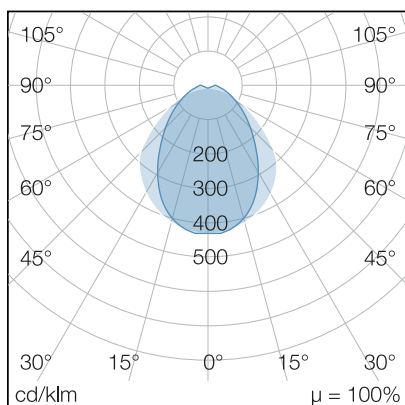

## LIGHT INFORMATION

beam angle	75°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 83

## PROPERTIES

through-wiring	5 x 1,5 mm <sup>2</sup>
connection	Terminal: 5-pole max. 1,5 mm <sup>2</sup>
power factor	> 0.95
module per circuit breaker B10A	30
module per circuit breaker B16A	48
module per circuit breaker C10A	43
module per circuit breaker C16A	69
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz
voltage range DC	176 - 276 V DC

## ORDER OVERVIEW

IndustryLUX FARO X3 1500-75   4.000 K	
product code	111540460015
EAN code	4260374013914
warranty	5 years

## ACCESSORIES

Mounting plate for 2-3 luminaires
Cord suspension 2m
Top-Entry-Cap

## PERFORMANCE

luminous efficiency	148 lm/W
system performance	46 W
luminous flux	6.800 lm
dimnable	Dip switch

## RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-25 to +50 °C
foodready	Yes

## MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

## SCOPE OF DELIVERY

includes 2x mounting clip and cable gland M20

## DIMENSION

L x W x H / Ø (H2)	1.500 x 104 x 57 (77) mm
weight	2,3 kg