




IndustryLUX  
**FARO X3**  
HTS 1500-75 DALI I 5.000 K

Art.Nr.: 111550650067  
EAN: 4260374015741



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

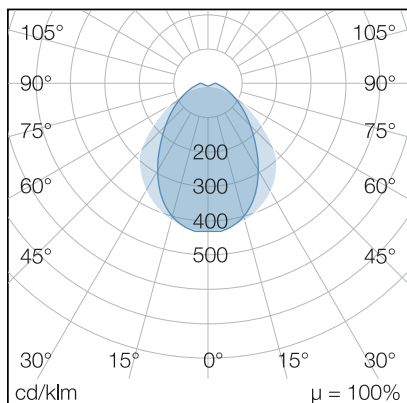

## LIGHT INFORMATION

|                       |          |
|-----------------------|----------|
| beam angle            | 75°      |
| color temperature     | 5.000 K  |
| color tolerance       | < 5 SDCM |
| color rendering index | > 83     |

## PROPERTIES

|                                 |   |
|---------------------------------|---|
| through-wiring                  | 5 x 1,5 mm <sup>2</sup>                   |
| connection                      | Terminal: 5-pole max. 1,5 mm <sup>2</sup> |
| power factor                    | > 0.95                                    |
| module per circuit breaker B10A | 32  |
| module per circuit breaker B16A | 51  |
| module per circuit breaker C10A | 32  |
| module per circuit breaker C16A | 51  |
| switching cycles                | > 500.000                                 |
| voltage range AC                | 220 – 240 V AC, 50/60 Hz                  |

## ORDER OVERVIEW

IndustryLUX FARO X3 HTS 1500-75  
DALI I 5.000 K

|              |               |
|--------------|---------------|
| product code | 111550650067  |
| EAN code     | 4260374015741 |
| warranty     | 5 years       |

## ACCESSORIES

Mounting plate for 2-3 luminaires

Cord suspension 2m

Top-Entry-Cap

## PERFORMANCE

|                     |          |
|---------------------|----------|
| luminous efficiency | 131 lm/W |
| system performance  | 65 W     |
| luminous flux       | 8.500 lm |
| dimnable            | DALI     |

## RESILIENCE

|                       |                       |
|-----------------------|-----------------------|
| protection class      | II                    |
| impact resistance     | IK08                  |
| protection type       | IP65                  |
| lifespan              | > 50.000 h [L80, B10] |
| UV resistant          | Limited               |
| operating temperature | -30 to +60 °C         |
| foodready             | Yes                   |

## MATERIAL

|                    |               |
|--------------------|---------------|
| cover              | diffuse cover |
| material (cover)   | PC            |
| material (housing) | PC            |
| housing color      | White         |

## SCOPE OF DELIVERY

includes 2x mounting clip and cable gland M20

## DIMENSION

|                    |                          |
|--------------------|--------------------------|
| L x W x H / Ø (H2) | 1.500 x 104 x 57 (77) mm |
| weight             | 2,5 kg                   |