





IndustryLUX
FLAT 2.0
300 | 60 x 60° | 4.000K

Art.Nr.: 442206300146
EAN: 4260374018599



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

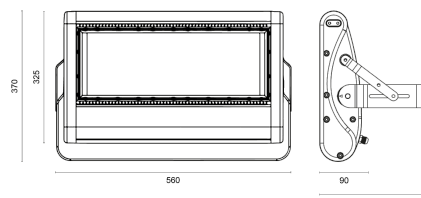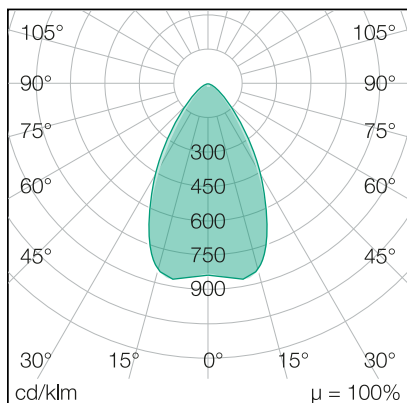

LIGHT INFORMATION

| | |
|-----------------------|----------|
| beam angle | 60 x 60° |
| color temperature | 4.000 K |
| color tolerance | < 5 SDCM |
| color rendering index | > 80 |

PROPERTIES

| | |
|---------------------------------|--|
| through-wiring | No |
| connection | Cable: 3 x 1,0 mm ² , 2,0 m |
| power factor | > 0.95 |
| module per circuit breaker B10A | 2 |
| module per circuit breaker B16A | 4 |
| module per circuit breaker C10A | 4 |
| module per circuit breaker C16A | 7 |
| switching cycles | > 500.000 |
| voltage range AC | 100 – 240 V AC, 50/60 Hz |
| voltage range DC | 176 – 250 V DC |

ORDER OVERVIEW

| | |
|--|---------------|
| IndustryLUX FLAT 2.0 300 l 60 x 60° l 4.000K | |
| product code | 442206300146 |
| EAN code | 4260374018599 |
| warranty | 5 years |

ACCESSORIES

| |
|--------------------------|
| No accessories available |
|--------------------------|

PERFORMANCE

| | |
|---------------------|-----------|
| luminous efficiency | 150 lm/W |
| system performance | 300 W |
| luminous flux | 45.000 lm |
| dimnable | No |

RESILIENCE

| | |
|-----------------------|-----------------------|
| protection class | I |
| impact resistance | IK08 |
| protection type | IP65 |
| lifespan | > 60.000 h [L80, B10] |
| UV resistant | Yes |
| operating temperature | -40 to +50 °C |
| foodready | No |

MATERIAL

| | |
|--------------------|-------------------|
| cover | Transparent cover |
| material (cover) | Glass |
| material (housing) | Aluminium |
| housing color | Black |

SCOPE OF DELIVERY

| |
|-----------------------|
| no accessory included |
|-----------------------|

DIMENSION

| | |
|--------------------|-------------------------------|
| L x W x H / Ø (H2) | 560 x 325 (368) x 90 (245) mm |
| weight | 11,1 kg |