





**IndustryLUX**  
**FLAT 2.0**  
400 | 60 x 90° | 4.000K

Art.Nr.: 442269400152  
EAN: 4260374018650



**LIGHT DISTRIBUTION CURVE**

**TECHNICAL DRAWING**

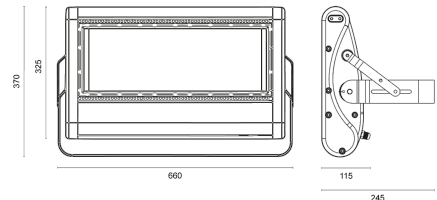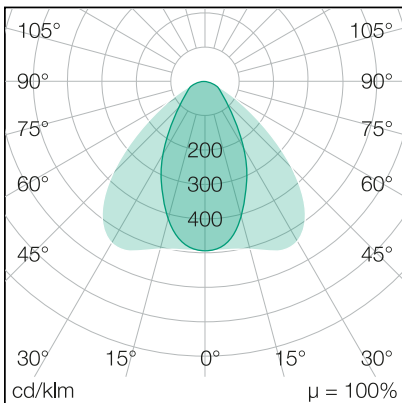

## LIGHT INFORMATION

beam angle	60 x 90°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	No
connection	Cable: 3 x 1,0 mm <sup>2</sup> , 2,0 m
power factor	> 0.95
module per circuit breaker B10A	—
module per circuit breaker B16A	1
module per circuit breaker C10A	1
module per circuit breaker C16A	2
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz
voltage range DC	176 – 250 V DC

## ORDER OVERVIEW

IndustryLUX FLAT 2.0 400 I 60 x 90° I 4.000K	
product code	442269400152
EAN code	4260374018650
warranty	5 years

## ACCESSORIES

No accessories available
--------------------------

## PERFORMANCE

luminous efficiency	152 lm/W
system performance	430 W
luminous flux	65.500 lm
dimnable	No

## RESILIENCE

protection class	I
impact resistance	IK08
protection type	IP65
lifespan	> 60.000 h [L80, B10]
UV resistant	Yes
operating temperature	–40 to +50 °C
foodready	No

## MATERIAL

cover	Transparent cover
material (cover)	Glass
material (housing)	Aluminium
housing color	Black

## SCOPE OF DELIVERY

no accessory included
-----------------------

## DIMENSION

L x W x H / Ø (H2)	660 x 325 (370) x 115 (245) mm
weight	12,3 kg