





# INDUSTRYLUX HT 160

Art.Nr.: 435070160051  
EAN: 4260374015819



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

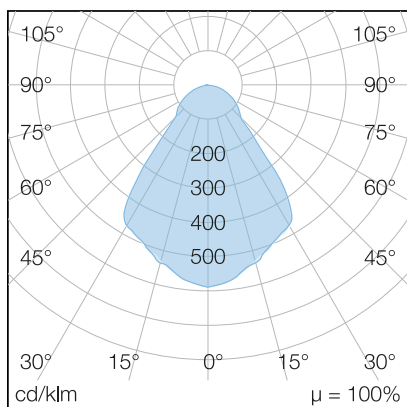

## LIGHT INFORMATION

beam angle	120°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	< 80

## PROPERTIES

through-wiring	No
connection	Cable, 3 x 1,0 mm <sup>2</sup> , 1,5 m
power factor	> 0.95
module per circuit breaker B10A	3
module per circuit breaker B16A	6
module per circuit breaker C10A	6
module per circuit breaker C16A	10
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

IndustryLUX HT 160	
product code	435070160051
EAN code	4260374015819
warranty	5 years

## ACCESSORIES

80° aluminium reflector für IndustryLUX series 034-205
100° aluminium reflector für IndustryLUX series 034-205
120° aluminium reflector für IndustryLUX series 034-205

## PERFORMANCE

luminous efficiency	144 lm/W
system performance	160 W
luminous flux	23.000 lm
dimnable	No

## RESILIENCE

protection class	I
impact resistance	IK06
protection type	IP65
lifespan	> 80.000 h [L80, B10]
UV resistant	Yes
operating temperature	-30 to +70 °C
foodready	No

## MATERIAL

cover	Transparent cover
material (cover)	Glass
material (housing)	Aluminium
housing color	Grey

## SCOPE OF DELIVERY

no accessory included
-----------------------

## DIMENSION

L x W x H / Ø (H2)	Ø 300 (330) x 460 mm
weight	10,7 kg