





# INDUSTRYLUX HT 220

Art.Nr.: 435070220052  
EAN: 4260374015826



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

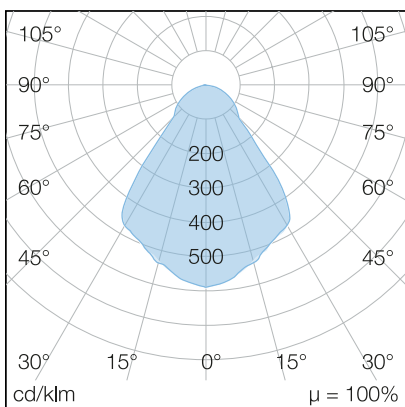

## LIGHT INFORMATION

|                       |          |
|-----------------------|----------|
| beam angle            | 120°     |
| color temperature     | 5.000 K  |
| color tolerance       | < 5 SDCM |
| color rendering index | < 80     |

## PROPERTIES

|                                 |  |
|---------------------------------|--|
| through-wiring                  | No                                     |
| connection                      | Cable, 3 x 1,0 mm <sup>2</sup> , 1,5 m |
| power factor                    | > 0.95                                 |
| module per circuit breaker B10A | 4                                      |
| module per circuit breaker B16A | 7                                      |
| module per circuit breaker C10A | 7                                      |
| module per circuit breaker C16A | 12                                     |
| switching cycles                | > 500.000                              |
| voltage range AC                | 220 – 240 V AC, 50/60 Hz               |

## ORDER OVERVIEW

|                    |               |
|--------------------|---------------|
| IndustryLUX HT 220 |               |
| product code       | 435070220052  |
| EAN code           | 4260374015826 |
| warranty           | 5 years       |

## ACCESSORIES

|   |
|---|
| 80° aluminium reflector für IndustryLUX series 034-205  |
| 100° aluminium reflector für IndustryLUX series 034-205 |
| 120° aluminium reflector für IndustryLUX series 034-205 |

## PERFORMANCE

|                     |           |
|---------------------|-----------|
| luminous efficiency | 143 lm/W  |
| system performance  | 220 W     |
| luminous flux       | 31.500 lm |
| dimnable            | No        |

## RESILIENCE

|                       |                       |
|-----------------------|-----------------------|
| protection class      | I                     |
| impact resistance     | IK06                  |
| protection type       | IP65                  |
| lifespan              | > 80.000 h [L80, B10] |
| UV resistant          | Yes                   |
| operating temperature | -30 to +70 °C         |
| foodready             | No                    |

## MATERIAL

|                    |                   |
|--------------------|-------------------|
| cover              | Transparent cover |
| material (cover)   | Glass             |
| material (housing) | Aluminium         |
| housing color      | Grey              |

## SCOPE OF DELIVERY

|                       |
|-----------------------|
| no accessory included |
|-----------------------|

## DIMENSION

|                    |                      |
|--------------------|----------------------|
| L x W x H / Ø (H2) | Ø 350 (330) x 540 mm |
| weight             | 16,4 kg              |