



IndustryLUX  
**LANARA 2.0**  
4000K

Art.Nr.: 441240150162  
EAN: 4260374018759



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

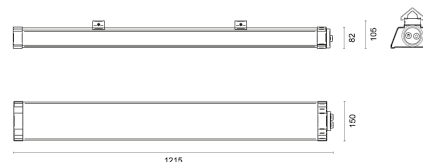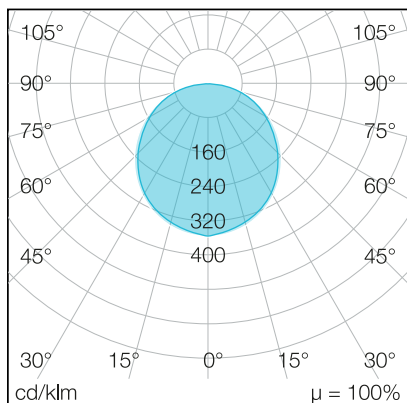

## LIGHT INFORMATION

beam angle	110°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 83

## PROPERTIES

through-wiring	7 x 1,5 mm <sup>2</sup>
connection	Terminal: 7-pole max. 2,5 mm <sup>2</sup>
power factor	> 0.95
module per circuit breaker B10A	5
module per circuit breaker B16A	8
module per circuit breaker C10A	8
module per circuit breaker C16A	14
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 HZ

## ORDER OVERVIEW

IndustryLUX LANARA 2.0 4000K	
product code	441240150162
EAN code	4260374018759
warranty	5 years

## ACCESSORIES

Mounting plate for 2-3 luminaires
-----------------------------------

## PERFORMANCE

luminous efficiency	150 lm/W
system performance	150 W
luminous flux	22.500 lm
dimnable	Dip switch I DALI

## RESILIENCE

protection class	I
impact resistance	IK08
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-20 to +50 °C
foodready	Yes

## MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC, Aluminium
housing color	Black

## SCOPE OF DELIVERY

includes 2x mounting clips
----------------------------

## DIMENSION

L x W x H / Ø (H2)	1.215 x 150 x 82 (104) mm
weight	3,3 kg