





IndustryLUX LANARA ROUND

Art.Nr.: 445650140050
EAN: 4260374015901



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

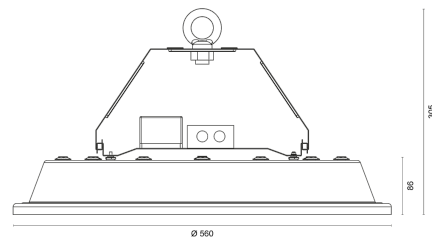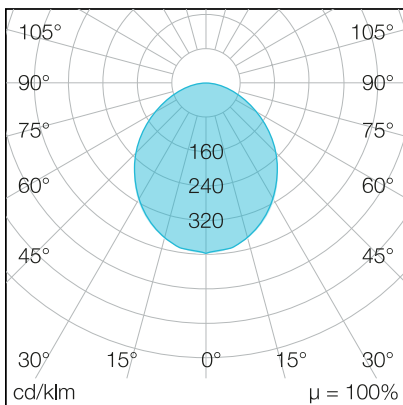

LIGHT INFORMATION

beam angle	110°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	> 83

PROPERTIES

through-wiring	3 x 1,0 + 2 x 0,5 mm ²
connection	Terminal: 7-pole max. 2,5 mm ²
power factor	> 0.95
module per circuit breaker B10A	8
module per circuit breaker B16A	13
module per circuit breaker C10A	14
module per circuit breaker C16A	22
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz
voltage range DC	127 – 300 V DC

ORDER OVERVIEW

IndustryLUX LANARA ROUND	
product code	445650140050
EAN code	4260374015901
warranty	5 years

ACCESSORIES

Cord suspension 2m

PERFORMANCE

luminous efficiency	155 lm/W
system performance	145 W
luminous flux	22.500 lm
dimnable	DALI 2

RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-20 to +50 °C
foodready	No

MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC, Aluminium
housing color	Black

SCOPE OF DELIVERY

no accessory included

DIMENSION

L x W x H / Ø (H2)	Ø 560 (316) x 86 (305) mm
weight	4,4 kg