





IndustryLUX RESIST 115-30

Art.Nr.: 435030110042
EAN: 4260374014652



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

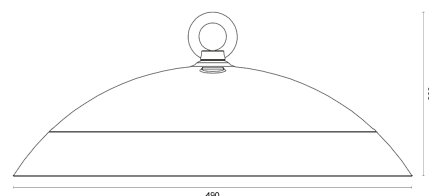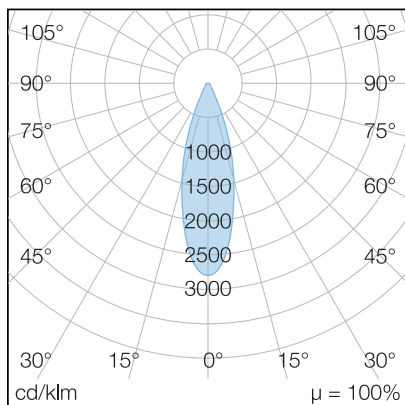

LIGHT INFORMATION

beam angle	30°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	No
connection	Cable, 3 x 1,0 mm ² , 1,5 m
power factor	> 0.95
module per circuit breaker B10A	3
module per circuit breaker B16A	5
module per circuit breaker C10A	5
module per circuit breaker C16A	9
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

ORDER OVERVIEW

IndustryLUX RESIST 115-30	
product code	435030110042
EAN code	4260374014652
warranty	5 years

ACCESSORIES

No accessories available

PERFORMANCE

luminous efficiency	162 lm/W
system performance	115 W
luminous flux	18.600 lm
dimnable	No

RESILIENCE

protection class	I
impact resistance	IK10
protection type	IP69
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-30 to +55 °C
foodready	Yes

MATERIAL

cover	Transparent cover
material (cover)	PC
material (housing)	Aluminium
housing color	Grey

SCOPE OF DELIVERY

no accessory included

DIMENSION

L x W x H / Ø (H2)	Ø 490 x 200 mm
weight	7,5 kg