





IndustryLUX  
**RODALIS**  
150 DALI

Art.Nr.: 435011150035  
EAN: 4260374014089



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

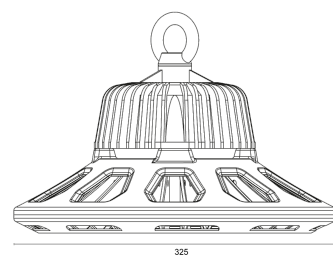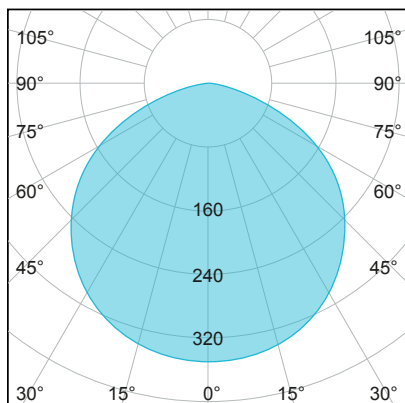

325

201

## LIGHT INFORMATION

beam angle	110°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	No
connection	2 x Cable: 3 x 1,0 mm <sup>2</sup> , 2 x 0,3 mm <sup>2</sup> , 0,2 m
power factor	> 0.95
module per circuit breaker B10A	13
module per circuit breaker B16A	21
module per circuit breaker C10A	13
module per circuit breaker C16A	21
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

IndustryLUX RODALIS 150 DALI	
product code	435011150035
EAN code	4260374014089
warranty	3 years

## ACCESSORIES

No accessories available

## PERFORMANCE

luminous efficiency	143 lm/W
system performance	150 W
luminous flux	21.400 lm
dimnable	DALI

## RESILIENCE

protection class	I
impact resistance	IK08
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-30 to +45 °C
foodready	No

## MATERIAL

cover	Transparent cover
material (cover)	PC
material (housing)	Aluminium
housing color	Black

## SCOPE OF DELIVERY

no accessory included

## DIMENSION

L x W x H / Ø (H2)	Ø 325 (152) x 86 (201) mm
weight	3,4 kg