





IndustryLUX
RODALIS
230 DALI

Art.Nr.: 435011230036
EAN: 4260374014096



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

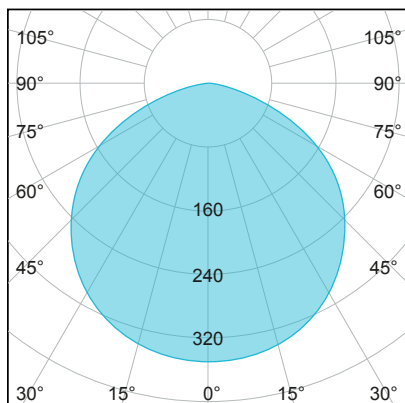

LIGHT INFORMATION

beam angle	110°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	No
connection	2 x Cable: 3 x 1,0 mm ² , 2 x 0,3 mm ² , 0,2 m
power factor	> 0.95
module per circuit breaker B10A	9
module per circuit breaker B16A	14
module per circuit breaker C10A	9
module per circuit breaker C16A	14
switching cycles	> 500.000
voltage range AC	100 – 240 V AC, 50/60 Hz

ORDER OVERVIEW

IndustryLUX RODALIS 230 DALI	
product code	435011230036
EAN code	4260374014096
warranty	3 years

ACCESSORIES

No accessories available

PERFORMANCE

luminous efficiency	140 lm/W
system performance	230 W
luminous flux	32.300 lm
dimnable	DALI

RESILIENCE

protection class	I
impact resistance	IK08
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-30 to +45 °C
foodready	No

MATERIAL

cover	Transparent cover
material (cover)	PC
material (housing)	Aluminium
housing color	Black

SCOPE OF DELIVERY

no accessory included

DIMENSION

L x W x H / Ø (H2)	Ø 400 (190) x 97 (220) mm
weight	4,9 kg