




# IndustryLUX TUBOLA 1500 K<sup>3</sup> PLUS DALI

Art.Nr.: 811595450057  
EAN: 4260374015116



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

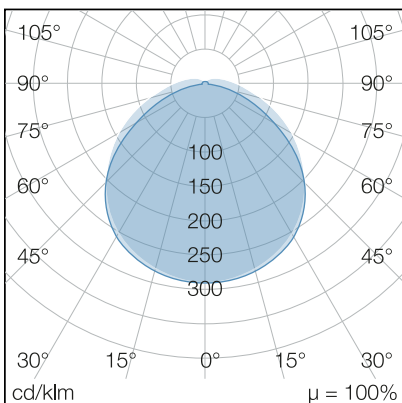

## LIGHT INFORMATION

beam angle	130°
color temperature	4.000   5.000   6.500 K
color tolerance	< 5 SDCM
color rendering index	> 83

## PROPERTIES

through-wiring	5 x 1,5 mm <sup>2</sup>
connection	Terminal: 5-pole max. 2,5 mm <sup>2</sup>
power factor	> 0.95
module per circuit breaker B10A	46
module per circuit breaker B16A	74
module per circuit breaker C10A	46
module per circuit breaker C16A	74
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz
voltage range DC	176 - 276 V DC

## ORDER OVERVIEW

IndustryLUX TUBOLA 1500 K <sup>3</sup> PLUS DALI	
product code	811595450057
EAN code	4260374015116
warranty	5 years

## ACCESSORIES

Mounting plate for 2-3 luminaires
Stainless steel mounting clip (set of 2)
Cable gland for pressure equalization

## PERFORMANCE

luminous efficiency	156 lm/W
system performance	45 W
luminous flux	7.000 lm
dimnable	DALI

## RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-25 to +50 °C
foodready	Yes

## MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

## SCOPE OF DELIVERY

includes 2x mounting clip and cable gland M20

## DIMENSION

L x W x H / Ø (H2)	1.500 x Ø 48 (80) mm
weight	1,0 kg