



IndustryLUX TUBOLA


1500 K³X PLUS DALI

Art.Nr.: 811595450079
EAN: 4260374016120



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

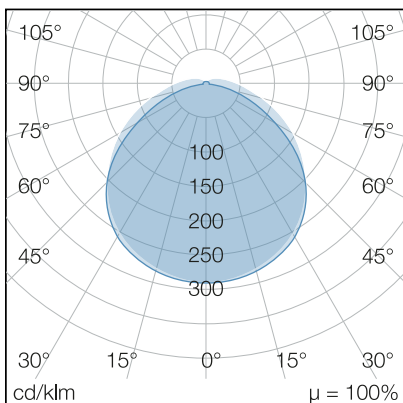

LIGHT INFORMATION

beam angle	130°
color temperature	4.000 5.000 6.500 K
color tolerance	< 5 SDCM
color rendering index	> 83

PROPERTIES

through-wiring	5 x 1,5 mm ²
connection	Terminal: 5-pole max. 2,5 mm ²
power factor	> 0.95
module per circuit breaker B10A	46
module per circuit breaker B16A	74
module per circuit breaker C10A	46
module per circuit breaker C16A	74
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz
voltage range DC	176 - 276 V DC

ORDER OVERVIEW

IndustryLUX TUBOLA 1500 K ³ X PLUS DALI	
product code	811595450079
EAN code	4260374016120
warranty	5 years

ACCESSORIES

Mounting plate for 2-3 luminaires
Stainless steel mounting clip (set of 2)
Cable gland for pressure equalization

PERFORMANCE

luminous efficiency	156 lm/W
system performance	45 W
luminous flux	7.000 lm
dimnable	DALI

RESILIENCE

protection class	II
impact resistance	IK04
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-25 to +50 °C
foodready	Yes

MATERIAL

cover	diffuse cover
material (cover)	PMMA
material (housing)	PMMA
housing color	White

SCOPE OF DELIVERY

includes 2x mounting clip and cable gland M20

DIMENSION

L x W x H / Ø (H2)	1.500 x Ø 48 (80) mm
weight	1,0 kg