



# INTERIORLUX



18M K<sup>3</sup>

Art.Nr.: 133040180099  
EAN: 4260374015239



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

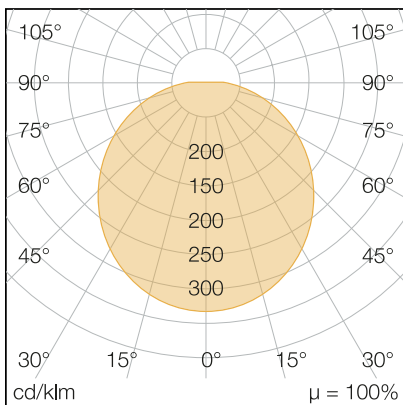

302

61

## LIGHT INFORMATION

beam angle	120°
color temperature	3.000   4.000   5.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	3 x 1,5 mm <sup>2</sup>
connection	Terminal: 3-pole max. 2,5 mm <sup>2</sup>
power factor	> 0.95
module per circuit breaker B10A	115
module per circuit breaker B16A	184
module per circuit breaker C10A	115
module per circuit breaker C16A	184
switching cycles	> 500.000
voltage range AC	200 – 240 V AC, 50/60Hz

## ORDER OVERVIEW

InteriorLUX 18M K <sup>3</sup>	
product code	133040180099
EAN code	4260374015239
warranty	3 years

## ACCESSORIES

No accessories available
--------------------------

## PERFORMANCE

luminous efficiency	100 lm/W
system performance	18 W
luminous flux	1.800 lm
dimnable	LED leading-/trailing edge

## RESILIENCE

protection class	II
impact resistance	IK10
protection type	IP54
lifespan	> 50.000 h [L80, B10]
UV resistant	No
operating temperature	-25 to +45 °C
foodready	Yes

## MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

## SCOPE OF DELIVERY

includes mounting material
----------------------------

## DIMENSION

L x W x H / Ø (H2)	Ø 300 x 61 mm
weight	0,9 kg