



INTERIORLUX



25M K³

Art.Nr.: 133840250097
EAN: 4260374015215



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

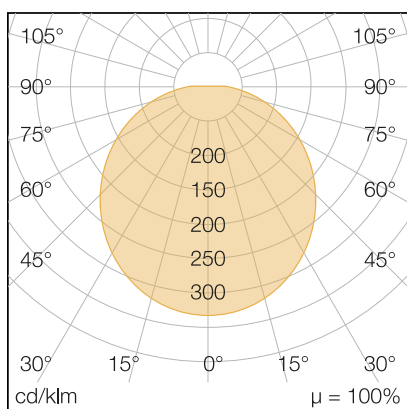

382

64

LIGHT INFORMATION

beam angle	120°
color temperature	3.000 4.000 5.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	3 x 1,5 mm ²
connection	Terminal: 3-pole max. 2,5 mm ²
power factor	> 0.95
module per circuit breaker B10A	83
module per circuit breaker B16A	132
module per circuit breaker C10A	83
module per circuit breaker C16A	132
switching cycles	> 500.000
voltage range AC	200 – 240 V AC, 50/60Hz

ORDER OVERVIEW

InteriorLUX 25M K ³	
product code	133840250097
EAN code	4260374015215
warranty	3 years

ACCESSORIES

No accessories available	
--------------------------	--

PERFORMANCE

luminous efficiency	100 lm/W
system performance	25 W
luminous flux	2.500 lm
dimnable	LED leading-/trailing edge

RESILIENCE

protection class	II
impact resistance	IK10
protection type	IP54
lifespan	> 50.000 h [L80, B10]
UV resistant	No
operating temperature	-25 to +45 °C
foodready	Yes

MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

SCOPE OF DELIVERY

includes mounting material	
----------------------------	--

DIMENSION

L x W x H / Ø (H2)	Ø 380 x 64 mm
weight	1,4 kg