




# NoviLUX FLEX ROUND

24 K<sup>3</sup>


Art.Nr.: 502495290032  
EAN: 4260374017295



## LIGHT DISTRIBUTION CURVE

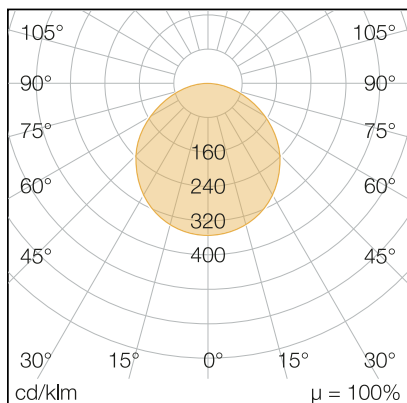

## TECHNICAL DRAWING



## LIGHT INFORMATION

beam angle	110°
color temperature	3.000   4.000   6.500 K
color tolerance	< 5 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	No
connection	Cable: 2 x 0,75 mm <sup>2</sup> , 0,2 m
power factor	> 0.90
module per circuit breaker B10A	86
module per circuit breaker B16A	138
module per circuit breaker C10A	86
module per circuit breaker C16A	138
switching cycles	> 50.000
voltage range AC	200 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

NoviLUX FLEX ROUND 24 K <sup>3</sup>	
product code	502495290032
EAN code	4260374017295
warranty	3 years

## ACCESSORIES

No accessories available
--------------------------

## PERFORMANCE

luminous efficiency	92 lm/W
system performance	24 W
luminous flux	2.200 lm
dimnable	LED leading-/trailing edge

## RESILIENCE

protection class	II
impact resistance	IK05
protection type	IP20
lifespan	> 25.000 h [L70, B10]
UV resistant	No
operating temperature	-20 to +40 °C
foodready	No

## MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

## SCOPE OF DELIVERY

includes mounting material
----------------------------

## DIMENSION

L x W x H / Ø (H2)	Ø 291 (60 –250) x 15 (26) mm
weight	0,6 kg