




NoviLUX FLEX SQUARE 12 K³


Art.Nr.: 501295160029
EAN: 4260374017264



LIGHT DISTRIBUTION CURVE

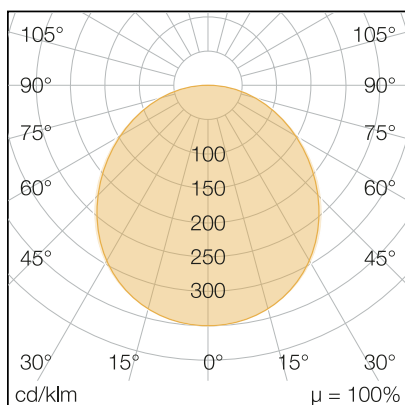

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	110°
color temperature	3.000 4.000 6.500 K
color tolerance	< 5 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	No
connection	Cable: 2 x 0,75 mm ² , 0,15 m
power factor	> 0.90
module per circuit breaker B10A	142
module per circuit breaker B16A	228
module per circuit breaker C10A	173
module per circuit breaker C16A	276
switching cycles	> 50.000
voltage range AC	200 – 240 V AC, 50/60 Hz

ORDER OVERVIEW

NoviLUX FLEX SQUARE 12 K ³	
product code	501295160029
EAN code	4260374017264
warranty	3 years

ACCESSORIES

No accessories available

PERFORMANCE

luminous efficiency	83 lm/W
system performance	12 W
luminous flux	1.000 lm
dimnable	LED leading-/trailing edge

RESILIENCE

protection class	II
impact resistance	IK05
protection type	IP20
lifespan	> 25.000 h [L70, B10]
UV resistant	No
operating temperature	-20 to +40 °C
foodready	No

MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

SCOPE OF DELIVERY

includes mounting material

DIMENSION

L x W x H / Ø (H2)	164 x 164 (Ø 55 – 125) x 15 (26) mm
weight	0,2 kg