





# NoviLUX PRO 125


Art.Nr.: 501240100022  
EAN: 4260374014614



## LIGHT DISTRIBUTION CURVE

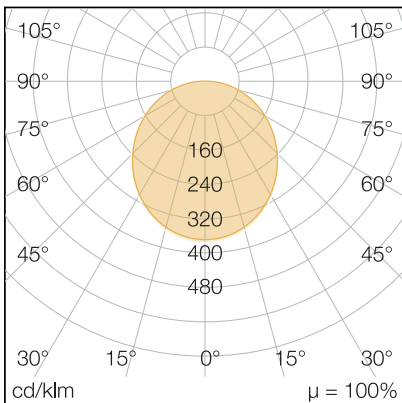

## TECHNICAL DRAWING

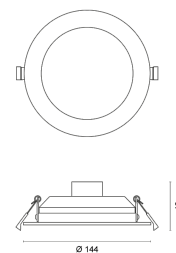

## LIGHT INFORMATION

|                       |          |
|-----------------------|----------|
| beam angle            | 110°     |
| color temperature     | 4.000 K  |
| color tolerance       | < 5 SDCM |
| color rendering index | > 80     |

## PROPERTIES

|                                 |   |
|---------------------------------|---|
| through-wiring                  | No  |
| connection                      | Terminal: 3-pole max. 2,5 mm <sup>2</sup> |
| power factor                    | > 0.95                                    |
| module per circuit breaker B10A | 21  |
| module per circuit breaker B16A | 34  |
| module per circuit breaker C10A | 35  |
| module per circuit breaker C16A | 57  |
| switching cycles                | > 500.000                                 |
| voltage range AC                | 220 – 240 V AC, 50/60 Hz                  |

## ORDER OVERVIEW

|                 |               |
|-----------------|---------------|
| NoviLUX PRO 125 |               |
| product code    | 501240100022  |
| EAN code        | 4260374014614 |
| warranty        | 3 years       |

## ACCESSORIES

|                          |
|--------------------------|
| No accessories available |
|--------------------------|

## PERFORMANCE

|                     |         |
|---------------------|---------|
| luminous efficiency | 98 lm/W |
| system performance  | 10 W    |
| luminous flux       | 980 lm  |
| dimnable            | No      |

## RESILIENCE

|                       |                       |
|-----------------------|-----------------------|
| protection class      | II                    |
| impact resistance     | IK08                  |
| protection type       | IP44                  |
| lifespan              | > 50.000 h [L80, B10] |
| UV resistant          | Limited               |
| operating temperature | -25 to +50 °C         |
| foodready             | Yes                   |

## MATERIAL

|                    |               |
|--------------------|---------------|
| cover              | diffuse cover |
| material (cover)   | PC            |
| material (housing) | PC            |
| housing color      | White         |

## SCOPE OF DELIVERY

|                            |
|----------------------------|
| includes mounting material |
|----------------------------|

## DIMENSION

|                    |                     |
|--------------------|---------------------|
| L x W x H / Ø (H2) | Ø 144 (125) x 46 mm |
| weight             | 0,3 kg              |