




# NoviLUX PRO 175


Art.Nr.: 501740200023  
EAN: 4260374014621



## LIGHT DISTRIBUTION CURVE

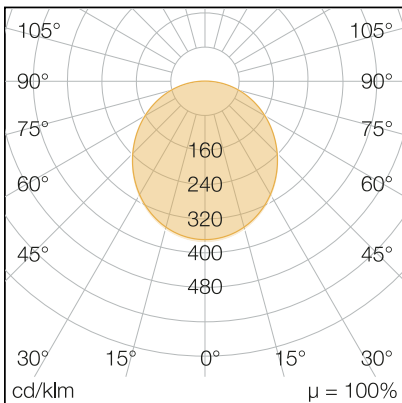

## TECHNICAL DRAWING



## LIGHT INFORMATION

beam angle	110°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	No
connection	Terminal: 3-pole max. 2,5 mm <sup>2</sup>
power factor	> 0.95
module per circuit breaker B10A	104
module per circuit breaker B16A	166
module per circuit breaker C10A	104
module per circuit breaker C16A	166
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

NoviLUX PRO 175	
product code	501740200023
EAN code	4260374014621
warranty	3 years

## ACCESSORIES

No accessories available
--------------------------

## PERFORMANCE

luminous efficiency	121 lm/W
system performance	19 W
luminous flux	2.300 lm
dimnable	No

## RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP44
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-25 to +50 °C
foodready	Yes

## MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

## SCOPE OF DELIVERY

includes mounting material
----------------------------

## DIMENSION

L x W x H / Ø (H2)	Ø 183 (175) x 46 mm
weight	0,4 kg