




NoviLUX PRO 200


Art.Nr.: 502040250024
EAN: 4260374014638



LIGHT DISTRIBUTION CURVE

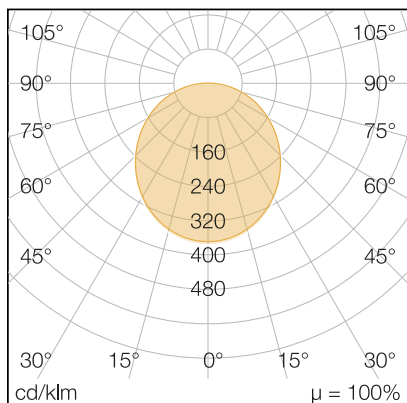

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	110°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	No
connection	Terminal: 3-pole max. 2,5 mm ²
power factor	> 0.95
module per circuit breaker B10A	104
module per circuit breaker B16A	166
module per circuit breaker C10A	104
module per circuit breaker C16A	166
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz

ORDER OVERVIEW

NoviLUX PRO 200	
product code	502040250024
EAN code	4260374014638
warranty	3 years

ACCESSORIES

No accessories available

PERFORMANCE

luminous efficiency	133 lm/W
system performance	24 W
luminous flux	3.200 lm
dimnable	No

RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP44
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-25 to +50 °C
foodready	Yes

MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

SCOPE OF DELIVERY

includes mounting material

DIMENSION

L x W x H / Ø (H2)	Ø 220 (200) x 46 mm
weight	0,5 kg