




NoviLUX PRO 70


Art.Nr.: 500940070012
EAN: 4260374013860



LIGHT DISTRIBUTION CURVE

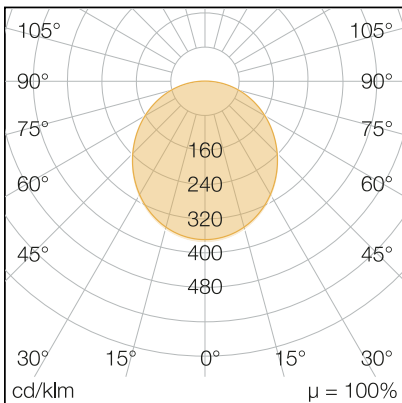

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	110°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	No
connection	Cable: 2 x 0,75 mm ² , 0,2 m
power factor	> 0.80
module per circuit breaker B10A	49
module per circuit breaker B16A	79
module per circuit breaker C10A	82
module per circuit breaker C16A	132
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 Hz

ORDER OVERVIEW

NoviLUX PRO 70	
product code	500940070012
EAN code	4260374013860
warranty	3 years

ACCESSORIES

No accessories available

PERFORMANCE

luminous efficiency	80 lm/W
system performance	8 W
luminous flux	640 lm
dimnable	No

RESILIENCE

protection class	II
impact resistance	IK08
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	-25 to +50 °C
foodready	No

MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC
housing color	White

SCOPE OF DELIVERY

includes mounting material

DIMENSION

L x W x H / Ø (H2)	Ø 100 (70) x 40 mm
weight	0,2 kg